


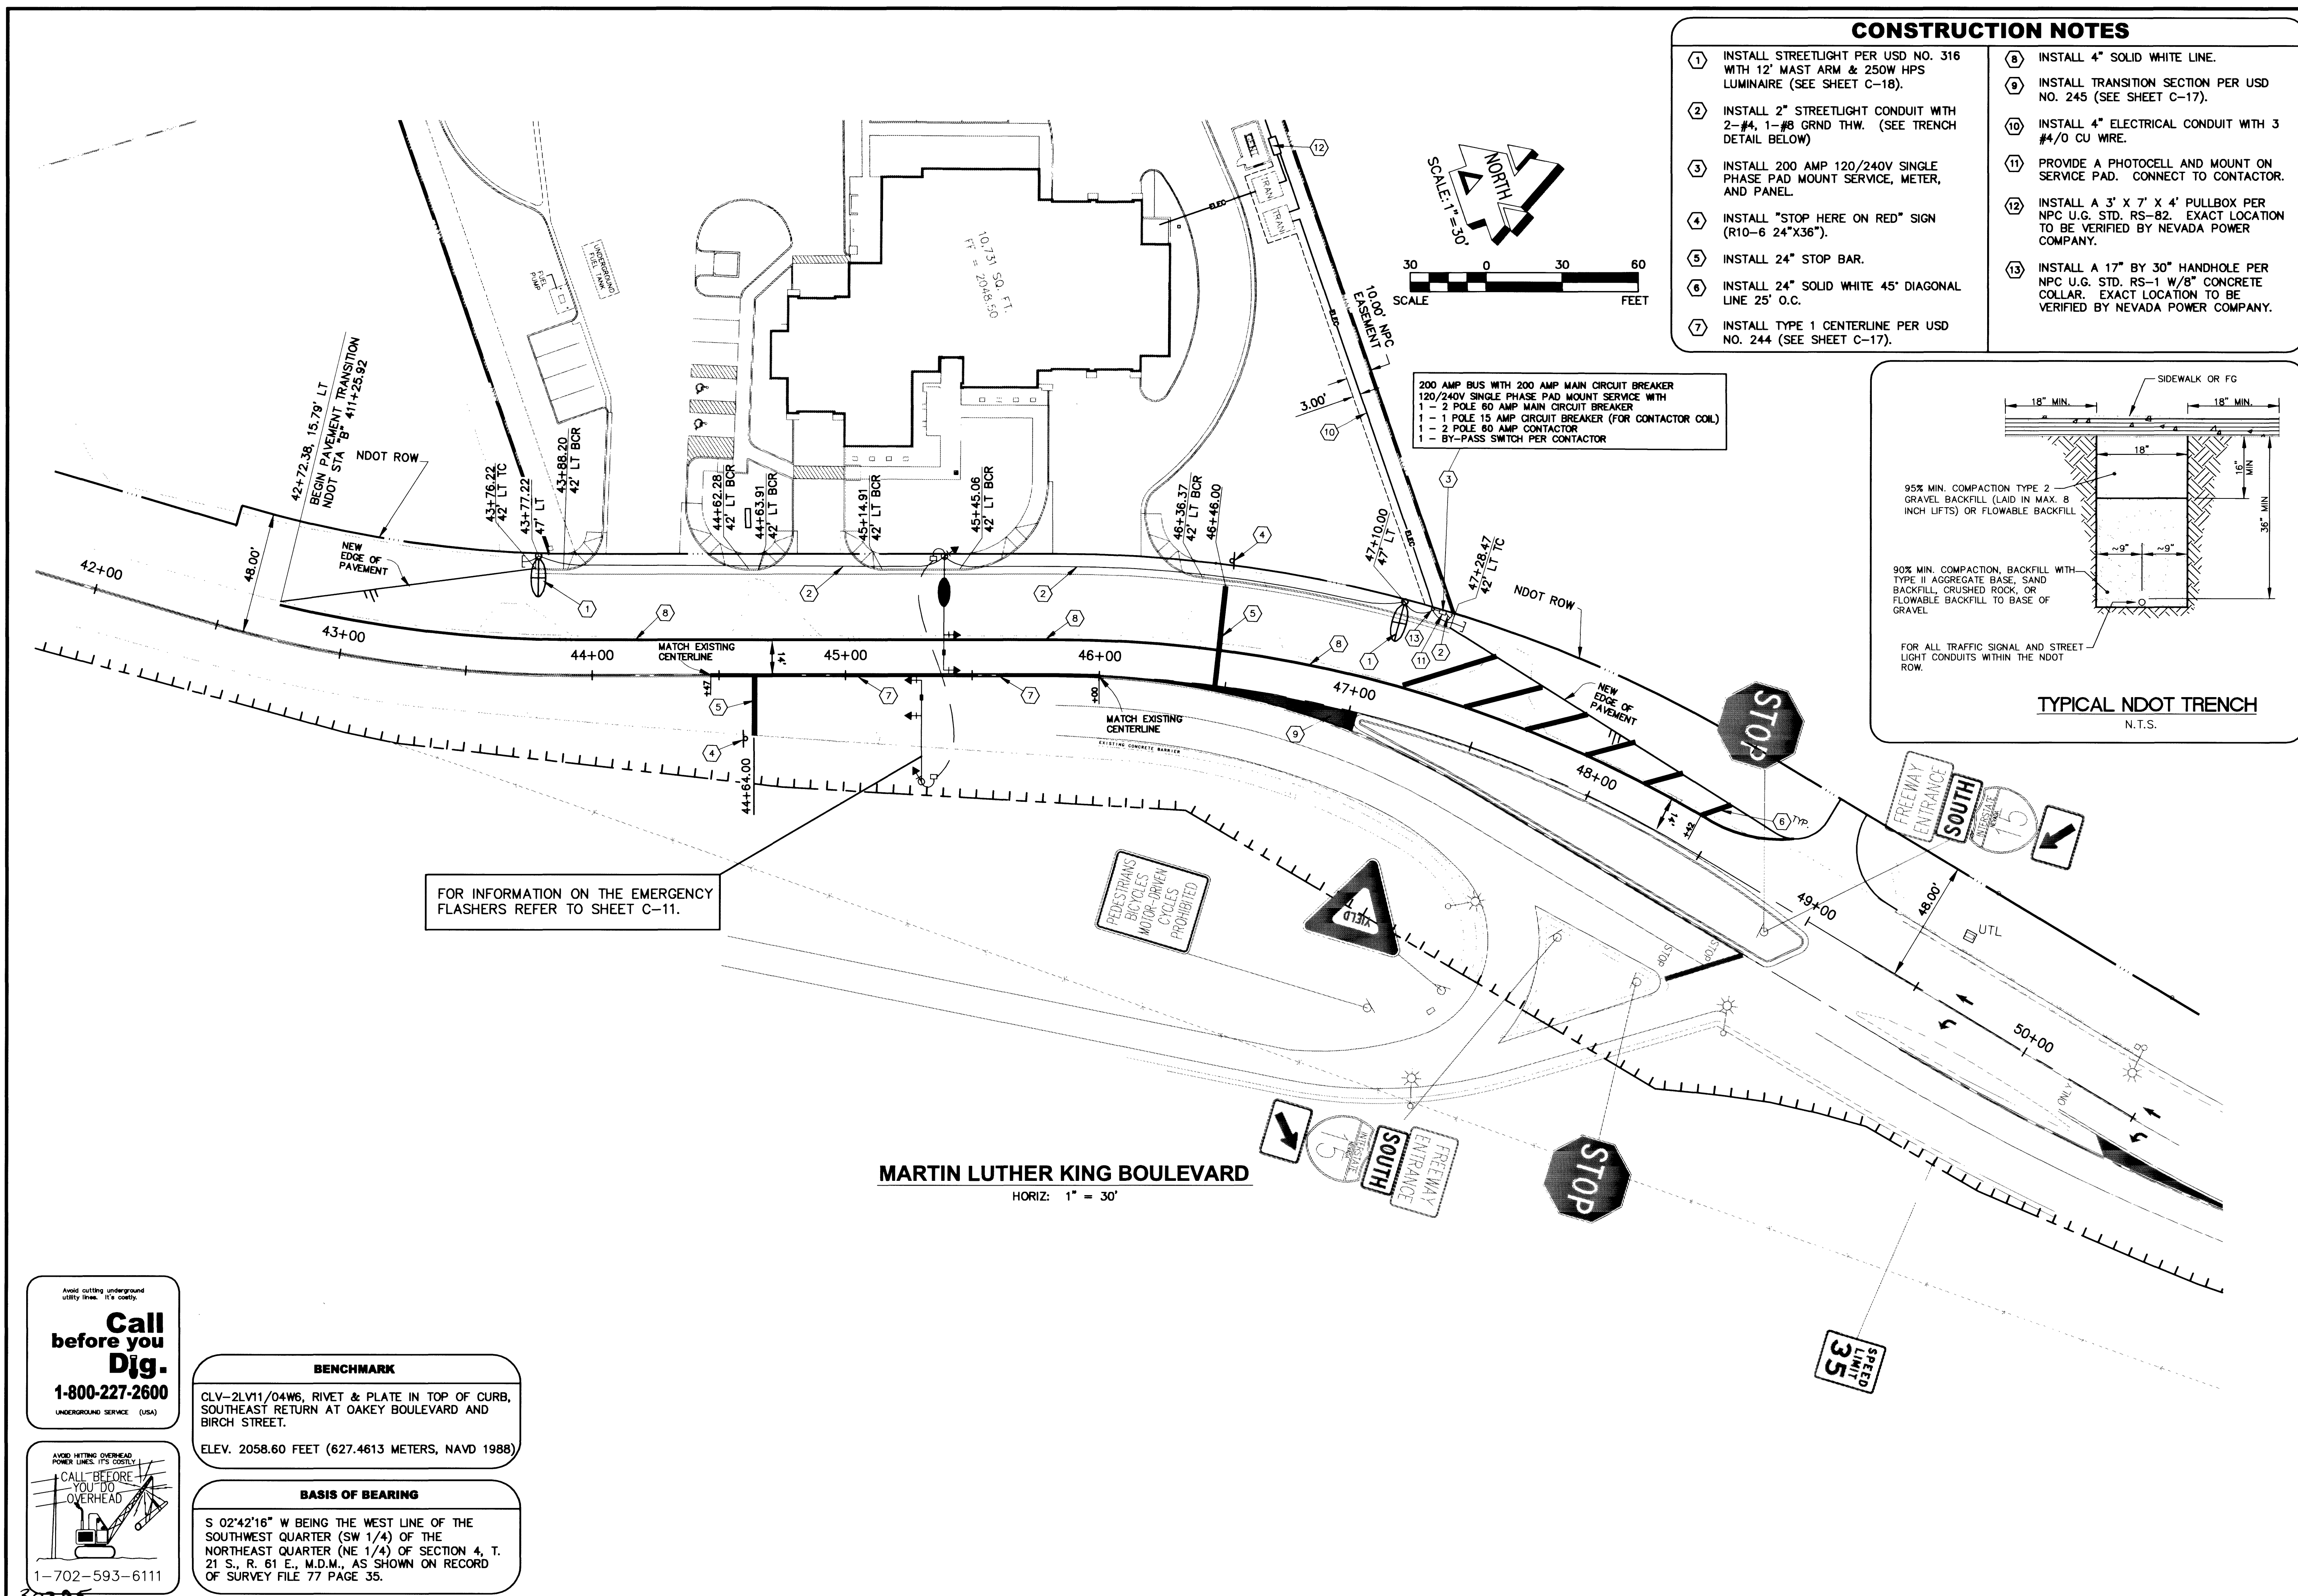

Avoid cutting underground utility lines. It's costly.


**Call
before you
Dig.**

1-800-227-2600

UNDERGROUND SERVICE (USA)

AVOID HITTING OVERHEAD
POWER LINES. IT'S COSTLY.

**CALL BEFORE
YOU DO
OVERHEAD**



1-702-593-6111

BENCHMARK


CLV-2LV11/04W6, RIVET & PLATE IN TOP OF CURB,
SOUTHEAST RETURN AT OAKLEY BOULEVARD AND
BIRCH STREET.

ELEV. 2058.60 FEET (627.4613 METERS, NAVD 98)

BASIS OF BEARING

S 02°42'16" W BEING THE WEST LINE OF THE
SOUTHWEST QUARTER (SW 1/4) OF THE
NORTHEAST QUARTER (NE 1/4) OF SECTION 4, T.
21 S., R. 61 E., M.D.M., AS SHOWN ON RECORD
OF SURVEY FILE 77 PAGE 35.

CONSTRUCTION NOTES	
①	INSTALL STREETLIGHT PER USD NO. 316 WITH 12" MAST ARM & 250W HPS LUMINAIRE (SEE SHEET C-18).
②	INSTALL 2" STREETLIGHT CONDUIT WITH 2-#4, 1-#8 GRND THW. (SEE TRENCH DETAIL BELOW)
③	INSTALL 200 AMP 120/240V SINGLE PHASE PAD MOUNT SERVICE, METER, AND PANEL.
④	INSTALL "STOP HERE ON RED" SIGN (R10-6 24"X36").
⑤	INSTALL 24" STOP BAR.
⑥	INSTALL 24" SOLID WHITE 45° DIAGONAL LINE 25' O.C.
⑦	INSTALL TYPE 1 CENTERLINE PER USD NO. 244 (SEE SHEET C-17).
⑧	INSTALL 4" SOLID WHITE LINE.
⑨	INSTALL TRANSITION SECTION PER USD NO. 245 (SEE SHEET C-17).
⑩	INSTALL 4" ELECTRICAL CONDUIT WITH 3 #4/0 CU WIRE.
⑪	PROVIDE A PHOTOCELL AND MOUNT ON SERVICE PAD. CONNECT TO CONTACTOR.
⑫	INSTALL A 3' X 7' X 4' PULLBOX PER NPC U.G. STD. RS-82. EXACT LOCATION TO BE VERIFIED BY NEVADA POWER COMPANY.
⑬	INSTALL A 17" BY 30" HANDHOLE PER NPC U.G. STD. RS-1 W/8" CONCRETE COLLAR. EXACT LOCATION TO BE VERIFIED BY NEVADA POWER COMPANY.

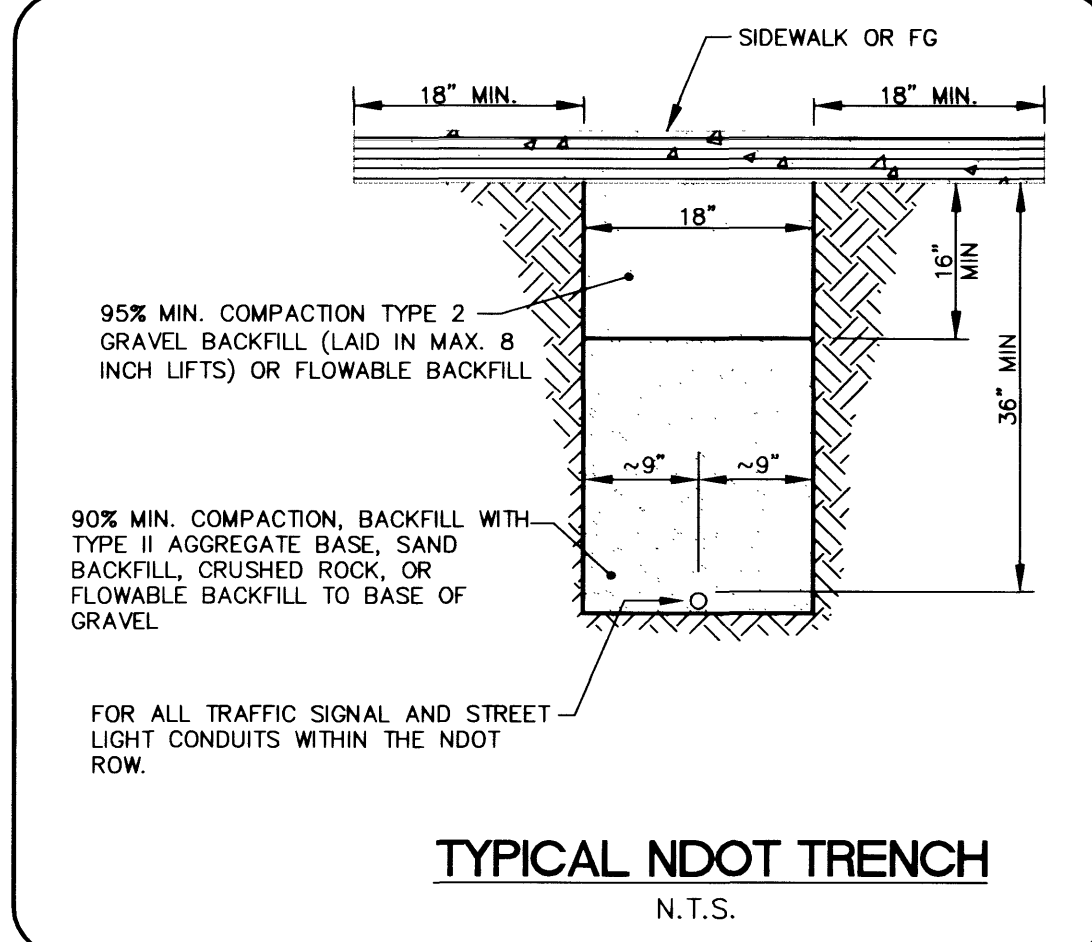

CITY OF LAS VEGAS		SHEET	
FIRE STATION NO. 10		C-10	
TRAFFIC SIGNAGE, STRIPING, & STREETLIGHTING		10 OF 24 SHEETS	
MARTIN LUTHER KING BOULEVARD		CLV DRAWING NO.	
		630-90-95	

