

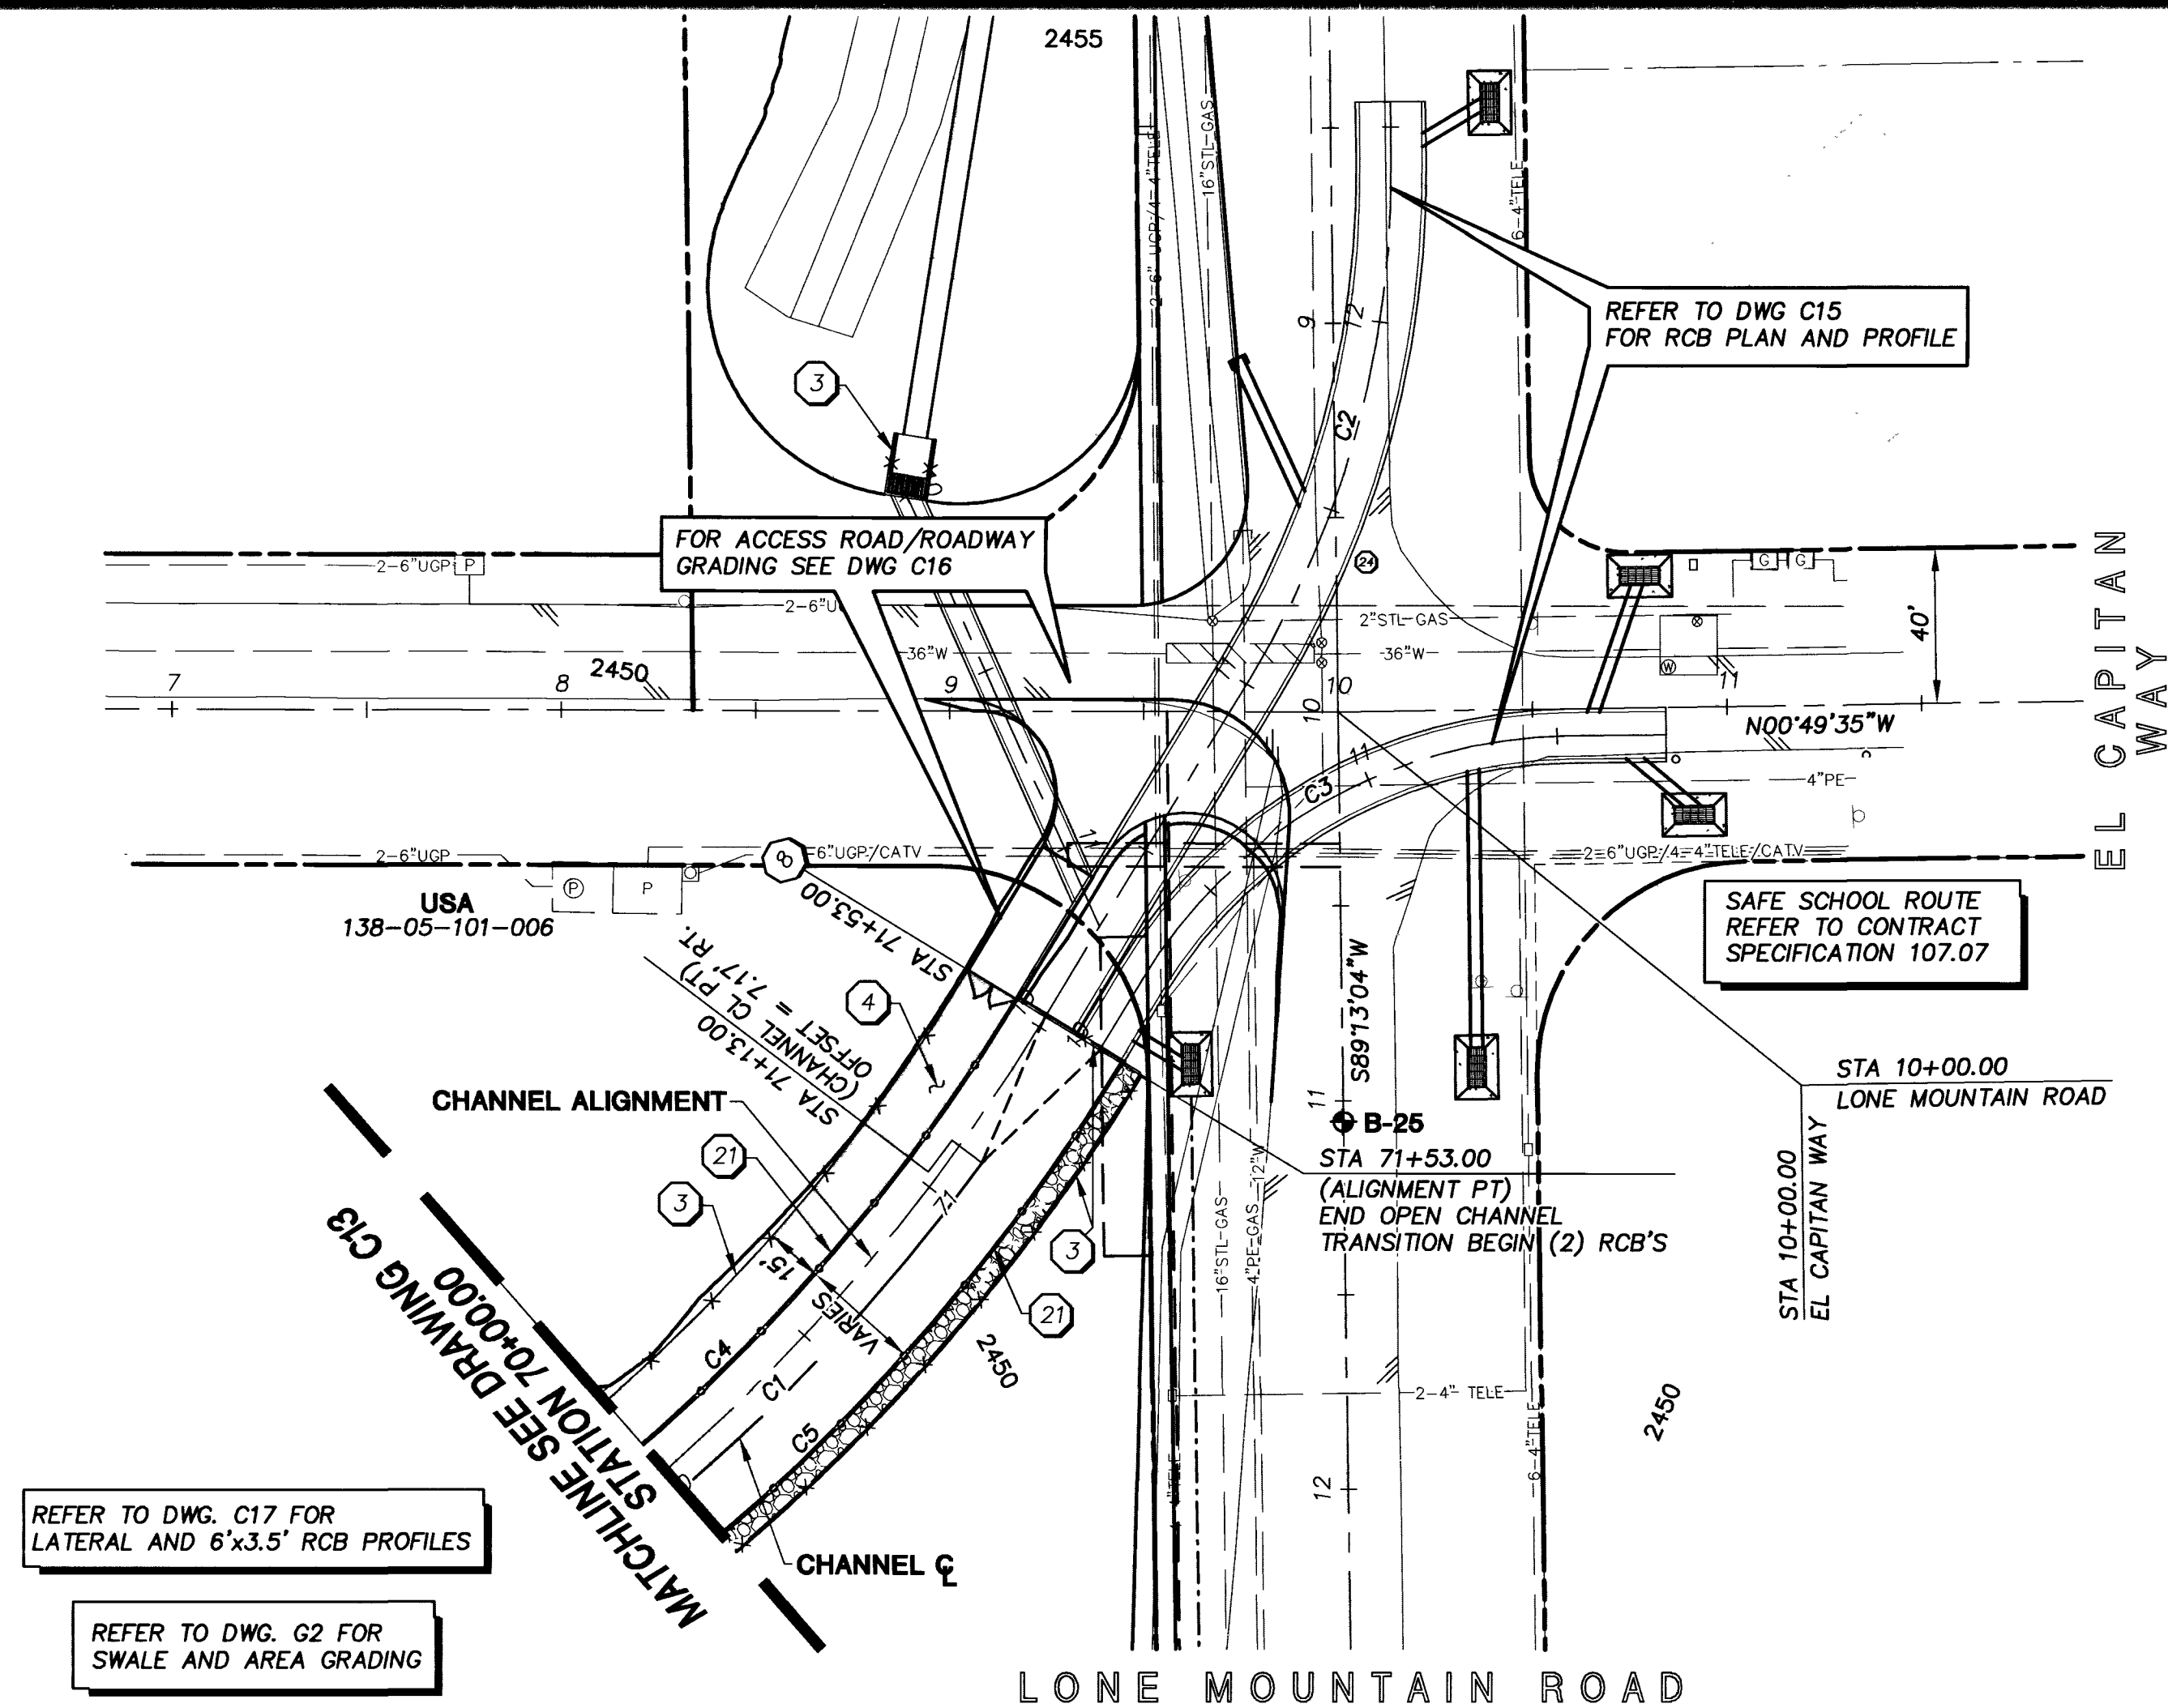


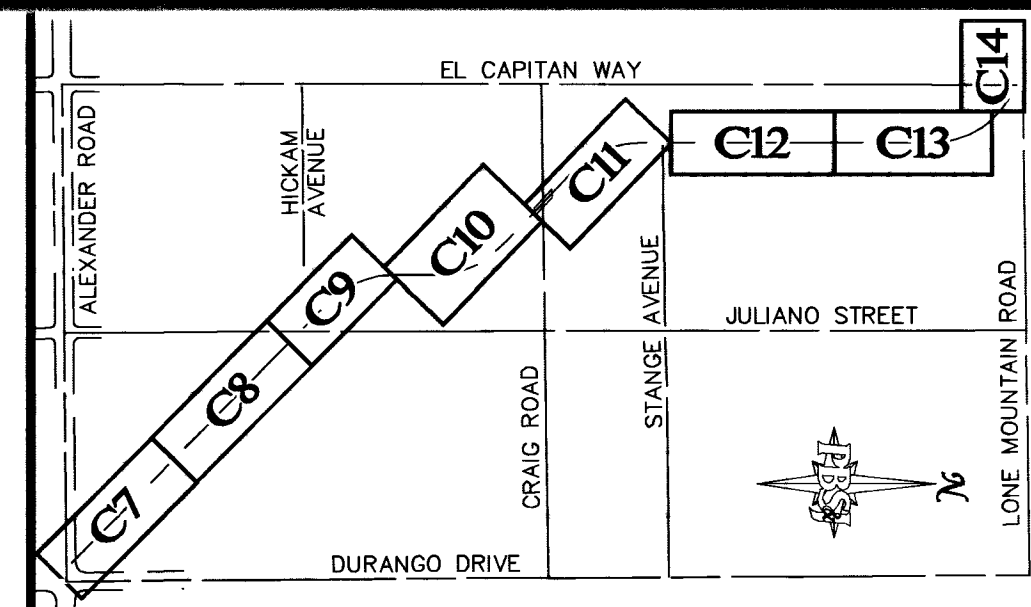

CURVE DATA				CENTERLINE
No.	RADIUS	DELTA	LENGTH	TANGENT
C1	492.32'	52°46'34"	513.53'	282.00'
C2	250.00'	31°58'43"	139.53'	71.64'
C3	130.00'	57°58'38"	131.55'	72.03'

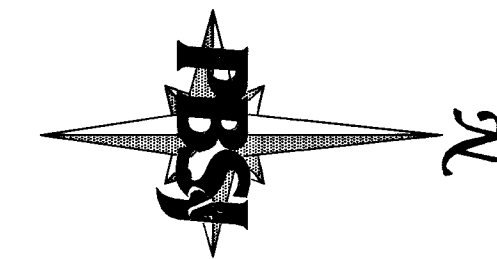

GRAPHIC SCALE

(IN FEET)

HORIZ 1 inch = 40ft.

VERTICAL 1 inch = 4 ft.

THE BASIS OF BEARING FOR THE SURVEY SHOWN HEREON
IS GRID NORTH AS DEFINED BY THE NEVADA COORDINATE
SYSTEM OF 1983 (NCS83) EAST ZONE (2701)

CITY OF LAS VEGAS BENCHMARK NO. 1LV00 3W4 - RIVET
AND PLATE IN ELECTRIC BASE, 250' EAST OF BUFFALO
DRIVE ON SOUTH SIDE OF CRAIG ROAD.


CAUTION:

KEY NOTES

- (1) CONSTRUCT RECTANGULAR CHANNEL PER SECTION 'B' DWG C5.
- (2) CONSTRUCT DOUBLE ARCH PER SECTION 'C' DWG C6.
- (3) CONSTRUCT 6' HIGH CHAIN LINK FENCE PER DETAIL 'B' DWG D1.
- (4) CONSTRUCT MAINTENANCE ROAD — 2" AC OVER 4" TYPE II BASE PER SECTION 'B' DRAWING C5.
- (5) INSTALL 12" PVC CLASS C900 WATERLINE PER DETAIL 'H' DRAWING D1. CONNECT NEW LINE TO EXISTING 12" PVC WELL DISCHARGE LINE. LENGTH PER PLANS.
- (6) INSTALL CHANNEL ACCESS LADDER PER DETAIL 'A' DWG D1.
- (7) CONSTRUCT 5.5" PLANTMIX BITUMINOUS SURFACE OVER 13" TYPE II AGGREGATE BASE. REFER TO SECTIONS THIS SHEET.
- (8) INSTALL DOUBLE SWING GATE PER DETAIL 'C' DWG D1.
- (9) INSTALL 12" PVC CLASS C900 WATERLINE PER DETAIL 'G' DRAWING D1. CONNECT NEW LINE TO EXISTING 12" PVC WELL DISCHARGE LINE. LENGTH PER PLANS.
- (10) CONSTRUCT CONCRETE 6"x3" CUT OFF WALL PER DETAIL 'F' DWG. D1. LENGTH PER PLANS.
- (11) CONSTRUCT ACCESS ROAD PER SECTION 'A' DWG E1.
- (12) REMOVE AND RESET EXISTING SIGN.
- (13) SAWCUT TO CLEAN EDGE, MATCH EXISTING.
- (14) INSTALL MODIFIED NDOT TYPE 2A DROP INLET PER DETAIL 'C' DWG D2.
- (15) INSTALL 36" CLASS III RCP PER DETAIL 'C' DWG. D3.
- (16) INSTALL CONCRETE APRON PER DETAIL 'C' DWG D2.
- (17) ADJUST EXISTING WATER VALVE BOX COVER TO FINISH GRADE PER UDACS PLAN #8.
- (18) EXISTING GAS APPURTENANCES TO BE ADJUSTED TO FINISH GRADE (BY OTHERS).
- (19) RELOCATE TELEPHONE MANHOLE (BY SPRINT).
- (20) PROTECT-IN-PLACE.
- (21) CONSTRUCT POST AND CABLE RAILING PER DETAIL 'A' DRAWING D2.
- (22) CONSTRUCT 2' WIDE SIDEWALK DRAIN PER STD. DRAWING #236.
- (23) ADJUST EXISTING WATER MANHOLE COVER TO FINISH GRADE PER USD #408.
- (24) INSTALL 4" WIDE WHITE PAINTED EDGE LINE.
- (25) INSTALL TYPE I CENTERLINE PER STD. DWG. #244.
- (26) CONSTRUCT 5' WIDE AC SIDEWALK 2" AC OVER 6" TYPE II AGGREGATE BASE.
- (27) RELOCATE NEVADA POWER FACILITIES. (BY NEVADA POWER).
- (28) CONSTRUCT CONCRETE APRON PER ENLARGEMENT 'A' DRAWING G1.
- (29) INSTALL 24" WHITE STOP LINE (TYPE I PMF) PER USD #254A.
- (30) INSTALL 24" CROSSWALK RECTANGLES (TYPE I PMF) PER USD #254A.
- (31) INSTALL 6" TYPE II AGGREGATE WITH 95% COMPACTION.
- (32) INSTALL PORTABLE CONCRETE BARRIER RAIL PER STD. DWG. #602.




TITLE:

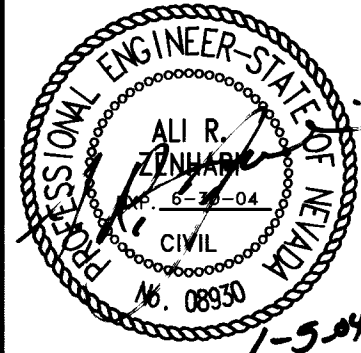

SHEET: **C14**
14 OF 42
DRAWING# **731-65B**

731-65B

OWAN NORTH CHANNEL FINAL SUBMITTAL.

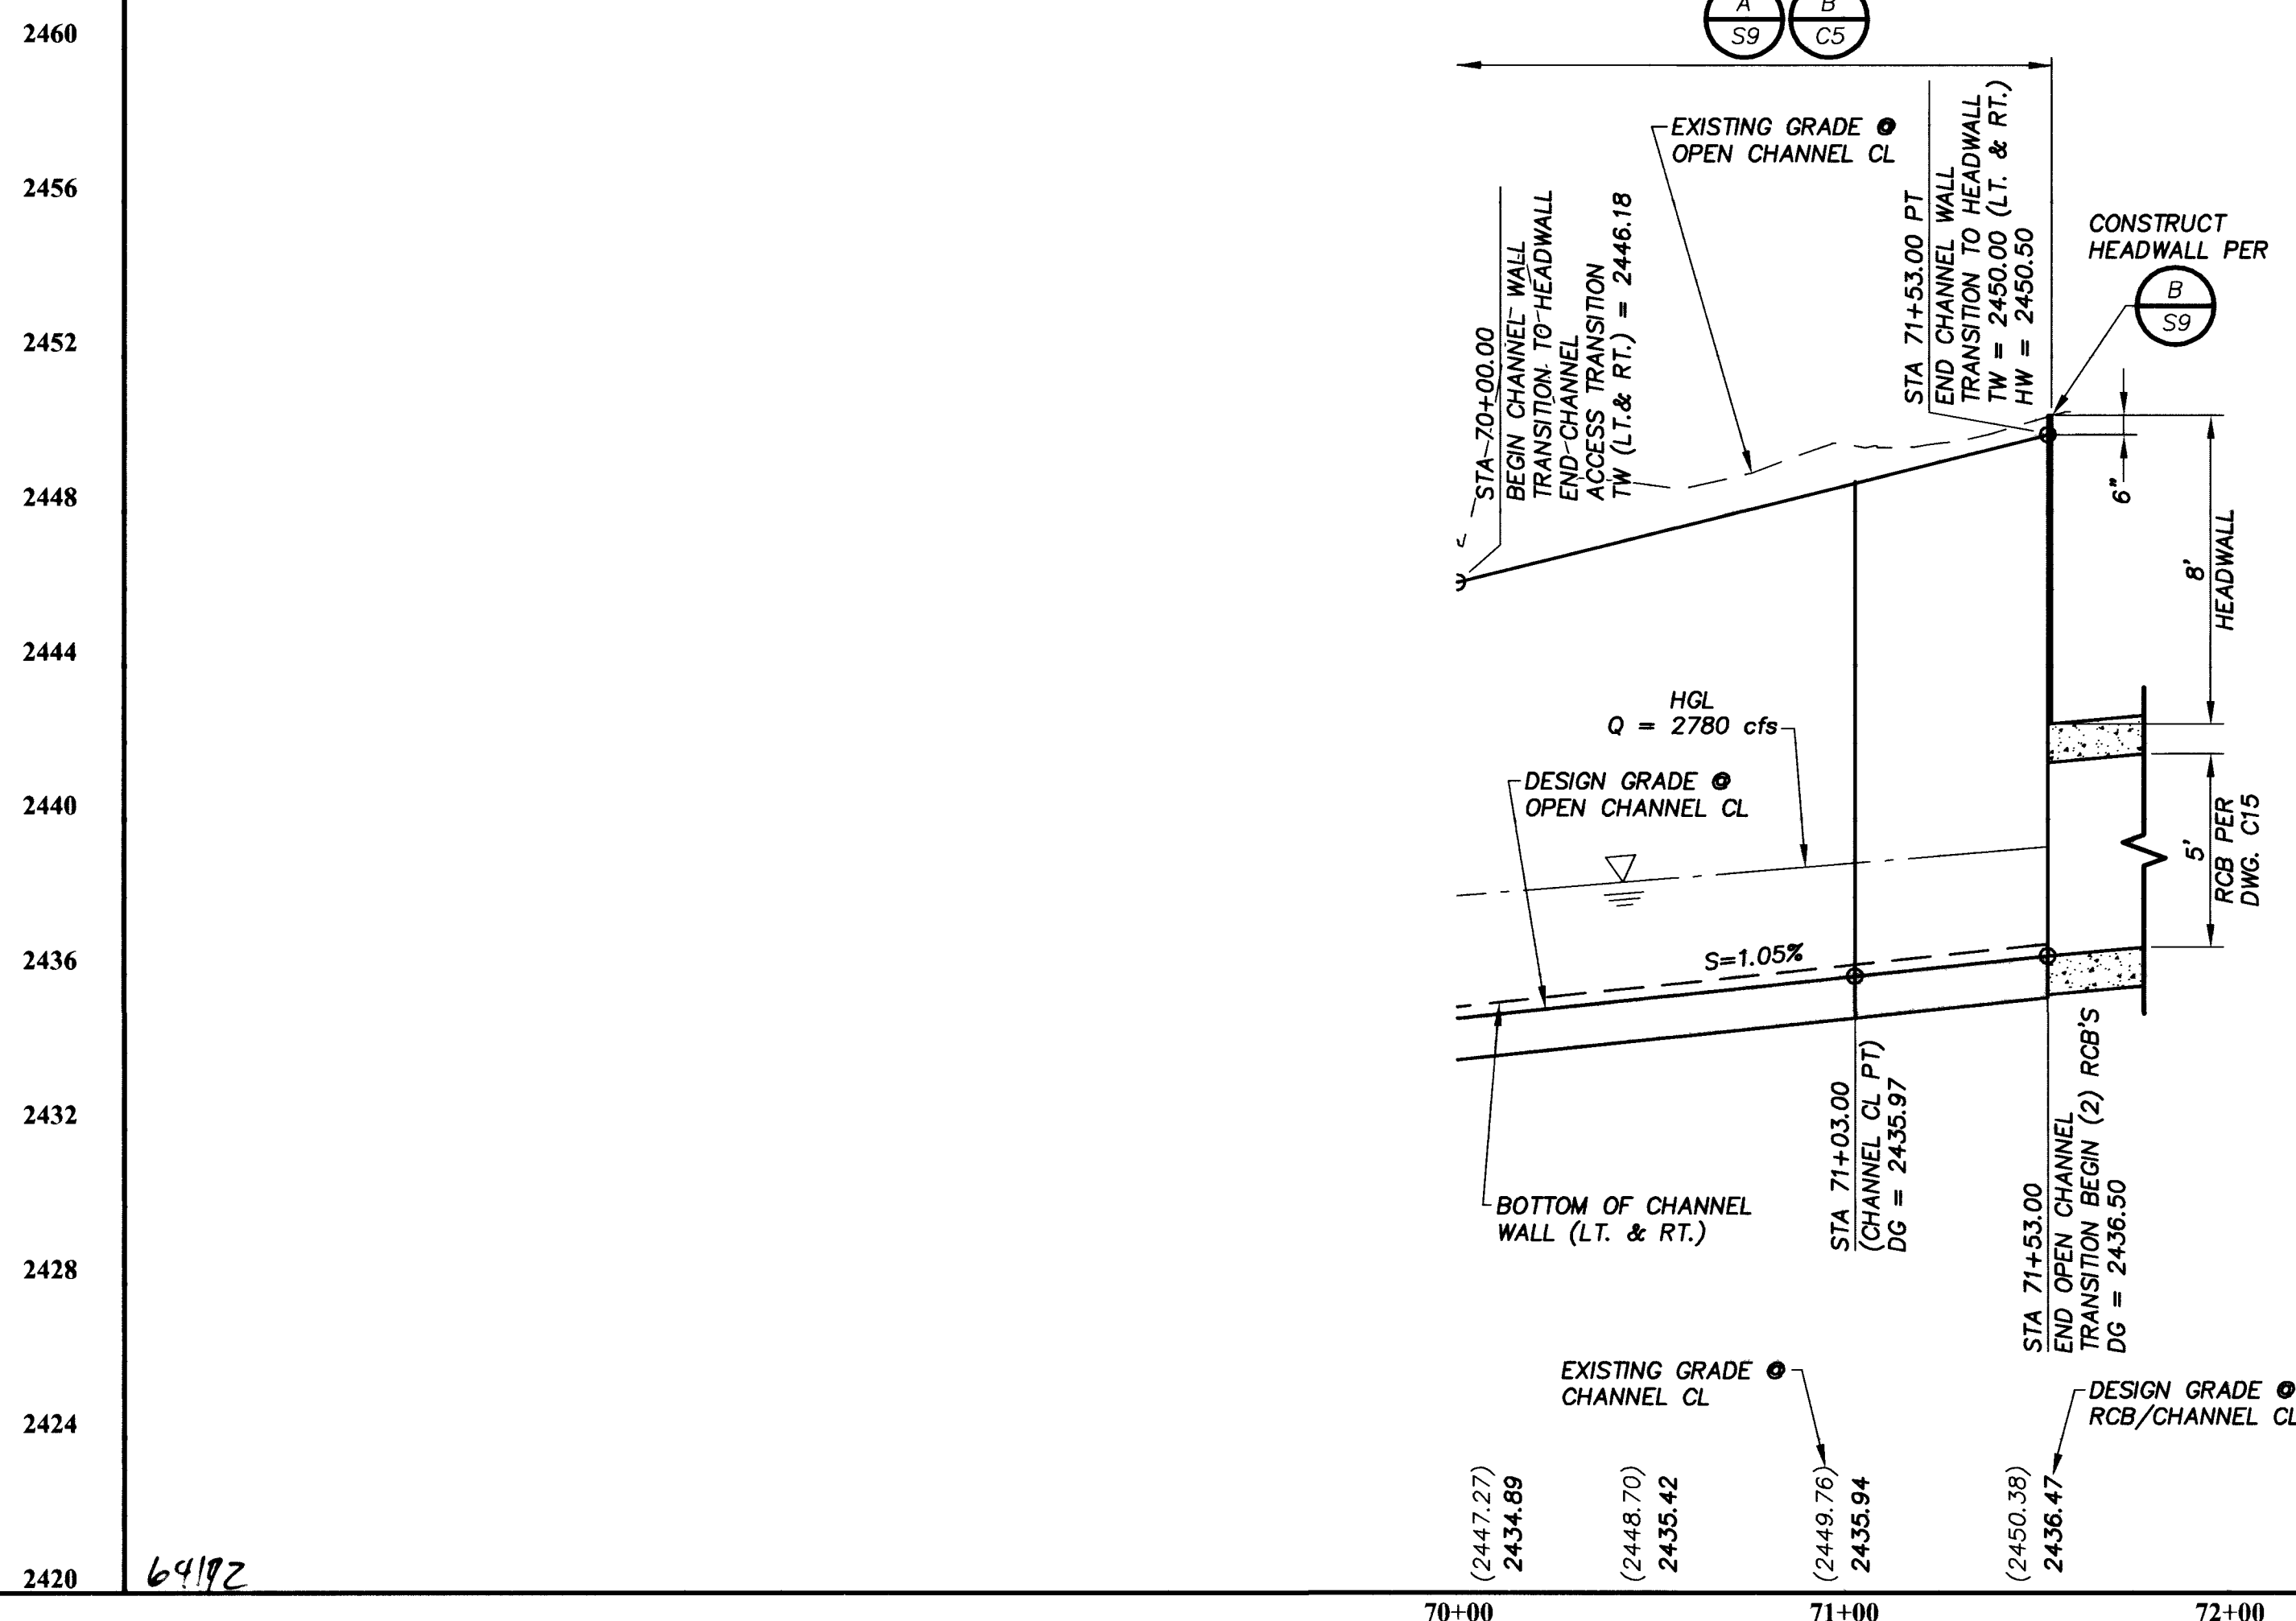

: \DWGS\510018\3C14-018.DWG Jan 06, 2004 - 1:50pm