
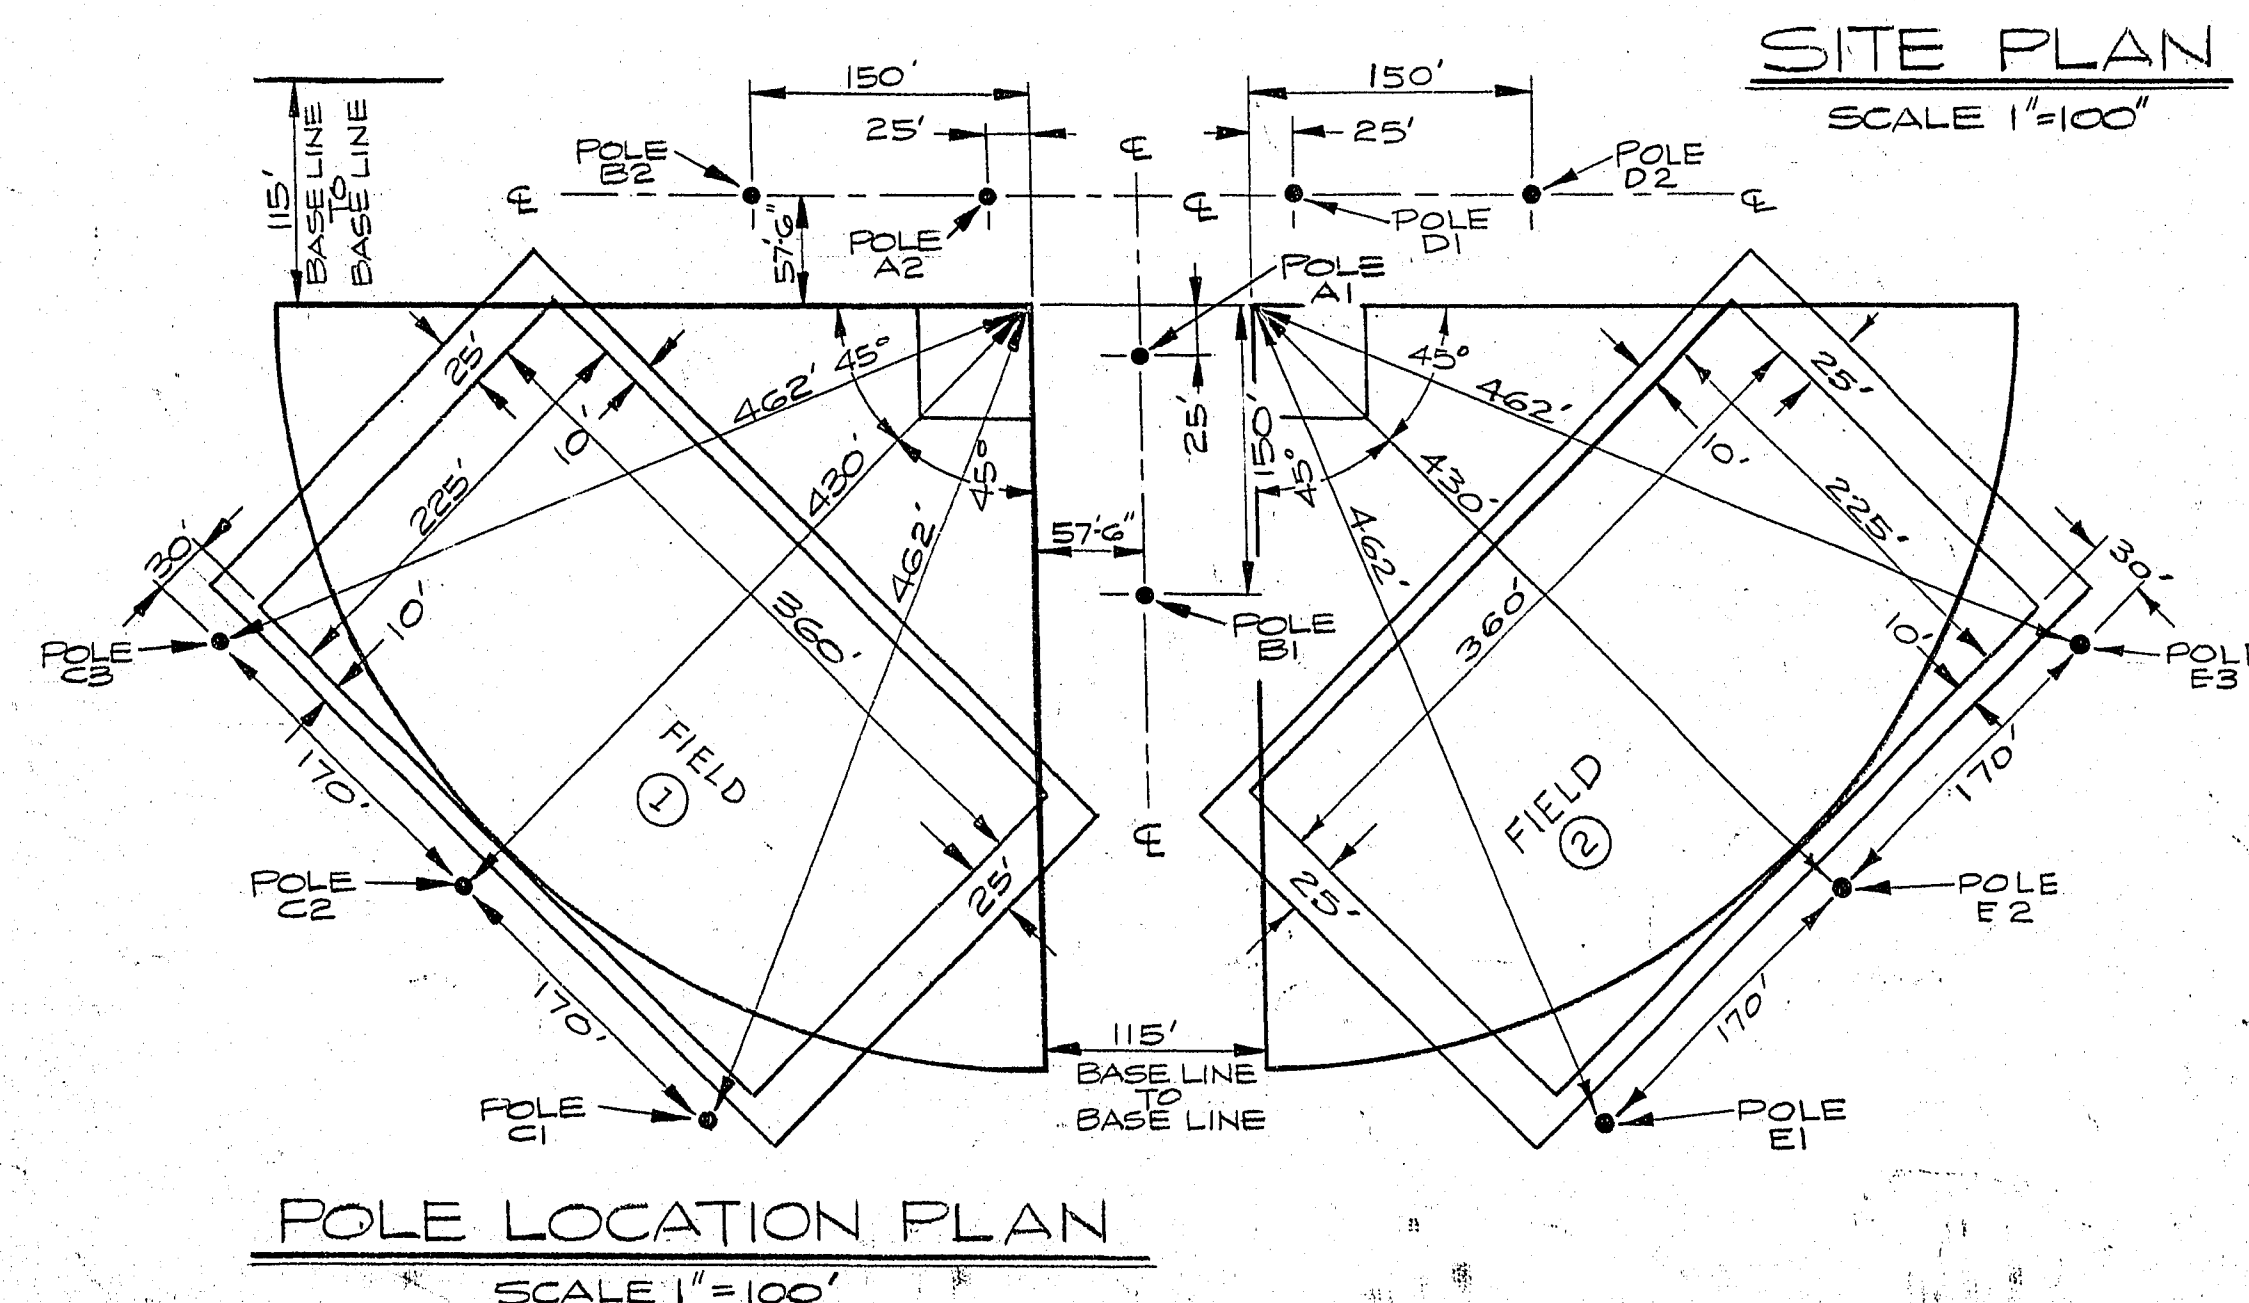
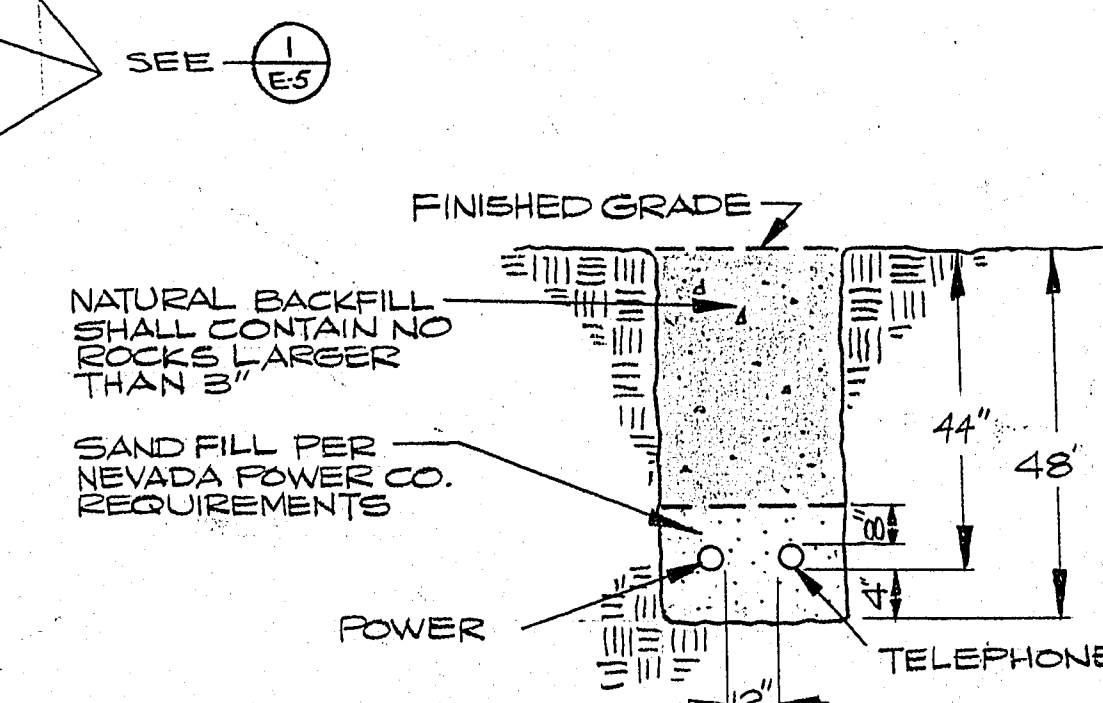


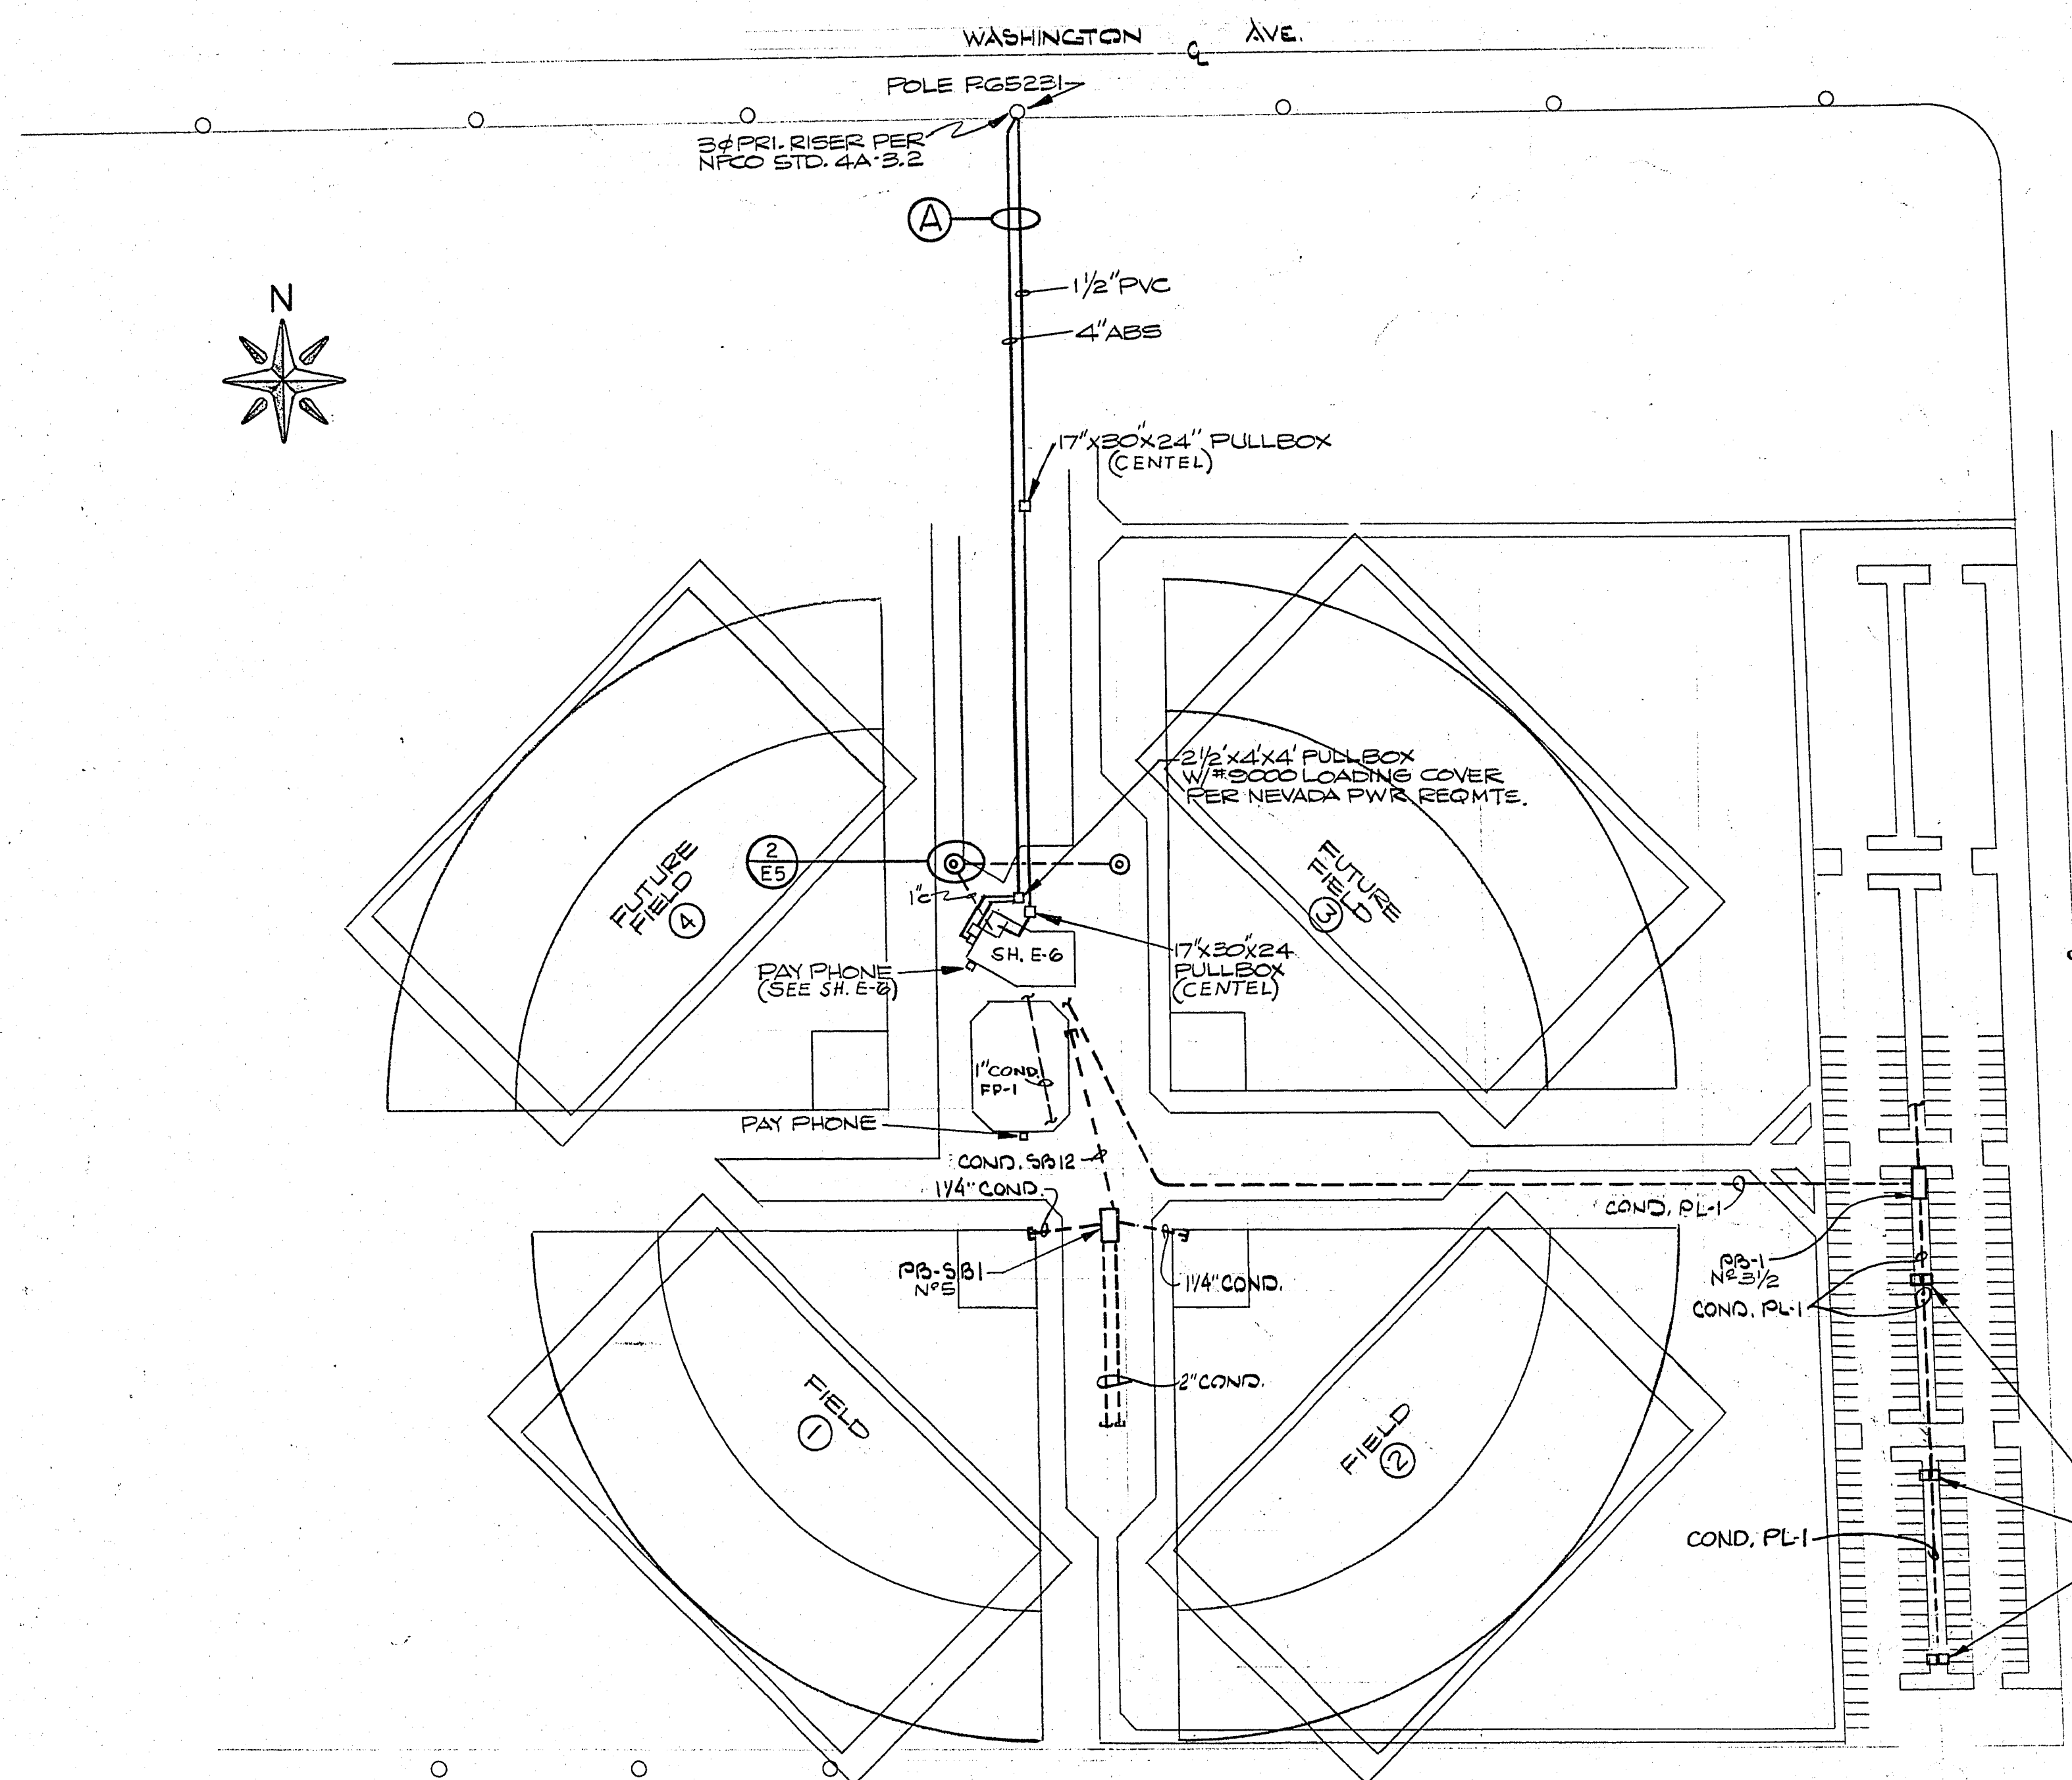


- NOTES:

- ① THE UNDERGROUND SERVICE SYSTEM SHALL BE IN CONFORMANCE WITH THE REG. MTS. OF NEVADA POWER CO. & CENTEL.
- ② NO. 4 BARE COPPER SHALL BE INSTALLED BETWEEN ALL LIGHTING POLES BACK TO MAIN SW. BD. ALSO INSTALL WITH CONDUITS STUBBED OUT FOR FUTURE USE.
- ③ THE CONTRACT DRAWINGS DO NOT PURPORT TO SHOW ALL THE DETAILS OF THE WORK. THEY ARE INTENDED TO ILLUSTRATE THE CHARACTER AND EXTENT OF THE PERFORMANCE DESIRED UNDER THE CONTRACT, THEREFORE, THEY MAY BE SUPPLEMENTED OR REVISED FROM TIME TO TIME, AS THE WORK PROGRESSES, BY THE ENGINEER OR (SUBJECT TO THE APPROVAL OF THE ENGINEER) BY THE CONTRACTOR. DRAWING REVISIONS AND/OR ADDITIONAL DRAWINGS OR SKETCHES WILL BE MADE AND FURNISHED THE CONTRACTOR IF THEY ARE DEEMED NECESSARY TO ADEQUATELY ILLUSTRATE THE WORK. ALL SUCH SUPPLEMENTARY AND REVISED DRAWINGS, THOSE WHICH DO NOT CHANGE THE CONTRACT AMOUNT, AUTOMATICALLY BECOME A PART OF THIS CONTRACT.

[illegible]

APPROX. ELECTRICAL QUANTITIES			
ITEM N°	DESCRIPTION	UNIT	QUANTITY
400.0324	24" TRENCH & BACKFILL	LF	3225
400.0336	36" TRENCH & BACKFILL	LF	1400
400.0348	48" TRENCH & BACKFILL	LF	700
400.0545	4'-6" DEEP FOUNDATION	EA	3
400.0580	9'-0" DEEP FOUNDATION	EA	3
400.0510	10'-0" DEEP FOUNDATION	EA	2
400.0511	11'-0" DEEP FOUNDATION	EA	7
400.1230	3 GA. 30' STEEL POLE	EA	3
400.1336	60 FT. FLOODLIGHTING POLE	EA	2
400.1337	70 FT. FLOODLIGHTING POLE	EA	3
400.1338	80 FT. FLOODLIGHTING POLE	EA	7
400.1350	1 INCH P.V.C., SCH 40 CONDUIT	LF	2525
400.1351	1 1/4 INCH P.V.C., SCH 40 CONDUIT	LF	7420
400.1360	1 1/2 INCH P.V.C., SCH 40 CONDUIT	LF	660
400.1370	2 INCH P.V.C. SCH 40 CONDUIT	LF	3220
400.1391	4 IN. ABS, TYPE II, UNDERGND. DUCT	LF	720
400.143	NO. 3 1/2 PULLBOX	EA	1
400.145	NO. 5 PULLBOX	EA	6
400.2100	5/8"x6" COPPERWELD GRD. ROD	EA	3
400.2351	250 WATT H.P.S. LUMINAIRE	EA	2
400.2400	1500 WATT MET. HAL. FLOODLIGHT	EA	176
400.2415	1000 WATT H.P.S. SECURITY LIGHT	EA	1
400.3050	FLOODLIGHT PLATFORM "A"	EA	3
400.3051	FLOODLIGHT PLATFORM "B"	EA	6
400.3052	FLOODLIGHT PLATFORM "C"	EA	3
400.3055	INSTALL. OF BASEBALL POLES	LOT	1
400.3120	SWITCHGEAR & CONTROL CENTER	EA	1
400.3131	TRANSFORMER PAD	EA	2
400.3140	KEY OPERATED CONTROLS	EA	4
400.8500	FUSEHOLDER 2 POLE	EA	185
400.8510	10 AMP FUSE	EA	370
400.890	CONDUCTOR SUPPORT CABLE	LF	1000
400.9004	N° 4 MHD SOLID BARE CONDUCTOR	LF	3020
400.9102	N° 2 THW CONDUCTOR	LF	14376
400.9106	N° 6 THW CONDUCTOR	LF	14860
400.9108	N° 8 THW CONDUCTOR	LF	10800
400.9110	N° 10 THW CONDUCTOR	LF	4024
400.9130	N° 3/8 THW CONDUCTOR	LF	140
400.9140	N° 1/2 THW CONDUCTOR	LF	162
400.9312	2 COND N° 12 STR. CU 50 CORD	LF	1760
999.100	CLEANING & FINAL CLEAN-UP	LOT	1

CONTRACT
DRAWING

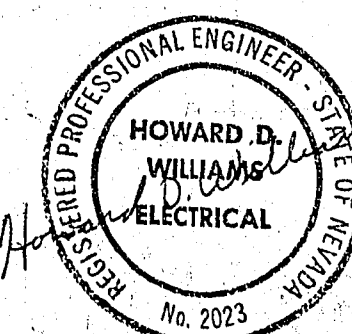

12/5/77



DWYER, LOBER, COHEN, INCORPORATED
CONSULTING ENGINEERS

[illegible]

REVISION NO.	DESCRIPTION	BY	DATE	APPROVED
REVISIONS				
CITY OF LAS VEGAS NEVADA				
FREEDOM PARK IMPROVEMENTS PHASE III				
AND PHASE IV				

SCALE (H) - 1"=100' SCALE (V) - N/A
W.O. N° 3289 IF BK N° - N/A
DESIGNED BY: H. WILLIAMS
DRAWN BY: F. SALVEZ
APPROVED BY DIRECTOR OF PUBLIC
SERVICES:

650.22-8