

UTILITY LOCATIONS SHOWN HEREON ARE APPROXIMATE ONLY. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO DETERMINE THE EXACT HORIZONTAL AND VERTICAL LOCATION OF ALL EXISTING UNDERGROUND OR OVERHEAD UTILITIES PRIOR TO COMMENCING CONSTRUCTION. NO REPRESENTATION IS MADE THAT ALL EXISTING UTILITIES ARE SHOWN HEREON. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR UTILITIES NOT SHOWN OR UTILITIES NOT SHOWN IN THEIR PROPER LOCATION. CONTRACTOR TO NOTIFY ENGINEER OF ANY CHANGES OR DISCREPANCIES.

Call before you Dig
Avoid cutting underground
utility lines. It's costly.

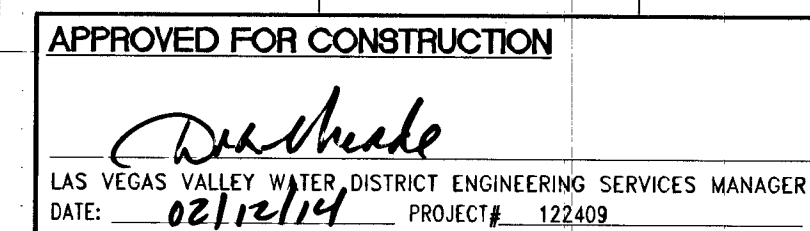
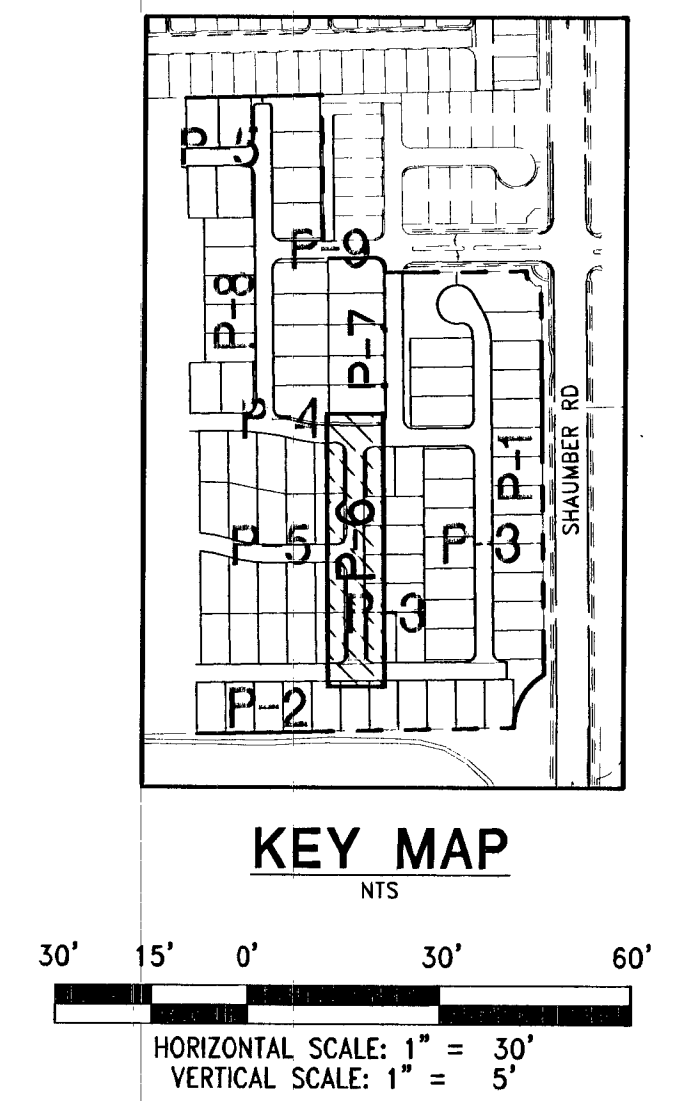
**Call
811**

1-800-227-2600
AND
LARK COUNTY TRAFFIC OPERATION
1-702-455-7544

- 1 CONSTRUCT AC PAVEMENT PER DETAILS 4 THRU 5 ON SHEET D-1
- 2 CONSTRUCT 24" "L" TYPE CURB AND GUTTER PER USDOCA # 216
- 3 CONSTRUCT "A" CURB PER USDOCA # 219
- 4 CONSTRUCT 8" CROSS GUTTER PER USDOCA # 228
- 5 CONSTRUCT 10" TYPE "CM2" DROP INLET PER USDOCA #412.1 *412.1*
- 6 CONSTRUCT 6" HIGH WROUGHT IRON FENCE/GATES
- 7 REMOVE EXISTING "A" CURB
- 8 REMOVE EXISTING L TYPE CURB AND GUTTER
- 9 REMOVE EXISTING AC PAVEMENT
- 10 REMOVE EXISTING CONCRETE SIDEWALK
- 11 REMOVE EXISTING DROP INLET
- 12 REMOVE EXISTING STORM DRAIN PIPE
- 13 REMOVE EXISTING 8" CROSS GUTTER
- 14 REMOVE EX STORM DRAIN MANHOLE
- 15 2'x37" RIP RAP, D50=6", THICKNESS=12"
- 16 INSTALL DROP INLET AS MONOLITHIC POUR
- 17 INSTALL 30" WEDGE CURB PER DETAIL 33 ON SHEET D-2

CITY OF LAS VEGAS BENCHMARK 6LV99 24NNW6
RIVET & PLATE CONCRETE PAD (ELECTRIC) 200'+/- SW OF P.I. OF
ELKHORN RD & SCHAUMBER RD (LANSFORD ST)
ELEVATION = 914.637 METERS (2008 ADJUSTMENT)
ELEVATION = 3000.77 U.S. SURVEY FEET (2008 ADJUSTMENT)

NORTH 00°45'09" EAST BEING THE BEARING OF THE EAST LINE OF THE SOUTHWEST QUARTER (SW 1/4) OF THE SOUTHWEST QUARTER (SW 1/4) OF SECTION 13, TOWNSHIP 19 SOUTH, RANGE 59 EAST, M.D.M., CITY OF LAS VEGAS, CLARK COUNTY, NEVADA AS SHOWN ON THAT CERTAIN MAP ON FILE IN THE CLARK COUNTY'S RECORDER'S OFFICE IN BOOK 118, PAGE 88 OF PLATS.

[illegible]