


ELECTRICAL INTERCONNECT PLAN - TENAYA WAY AREA 1
SCALE: 1"=100'-0"

NOTES:


- 1 MAKE 3/8" SAW CUT AT THE LIP OF CURB GUTTER FOR INSTALLATION OF INTERCONNECT CONDUIT IN EXISTING DEVELOPED AREAS. INSTALL NEW INTERCONNECT CONDUIT UNDER PROPOSED SIDEWALK IN EXISTING UNDEVELOPED AREAS. CONTRACTOR TO VERIFY EXISTING CONDITIONS PRIOR TO BID.
- 2 SEE SHEET T3 FOR TRAFFIC SIGNAL DESIGN OF TENAYA WAY AND BOX CANYON DRIVE INTERSECTION.
- 3 EXISTING No. 5 INTERCONNECT PULLBOX INCORRECTLY LABELED STREET LIGHTING. REMOVE EXISTING COVER AND RETURN TO CITY OF LAS VEGAS. INSTALL NEW No. 5 PULLBOX COVER LABELED 'TRAFFIC SIGNAL'.
- 4 REMOVE EXISTING TRAFFIC SIGNAL CABLES AS SHOWN FROM EXISTING CONDUITS AND REINSTALL WITH NEW INTERCONNECT CABLE. REMOVE SIGNAL LOOP LEAD-IN/CAMERA CABLES, INTERSECTION LIGHTING, AND OPTICAL DETECTION CABLES FROM CONDUIT. REINSTALL THESE CABLES ALONG WITH A NEW 12 PAIR INTERCONNECT CABLE. RECONNECT THE REMOVED CABLES TO THEIR PROPER TERMINAL BLOCKS. LVAGTS STAFF WILL CONNECT INTERCONNECT CABLE.

INTERCONNECT AND LOOP CABLE INSTALLATION GENERAL NOTES:

1. WHENEVER TRAFFIC SIGNALS ARE INOPERATIVE, THE TRAFFIC CONTROL WILL BE THE RESPONSIBILITY OF THE CONTRACTOR.

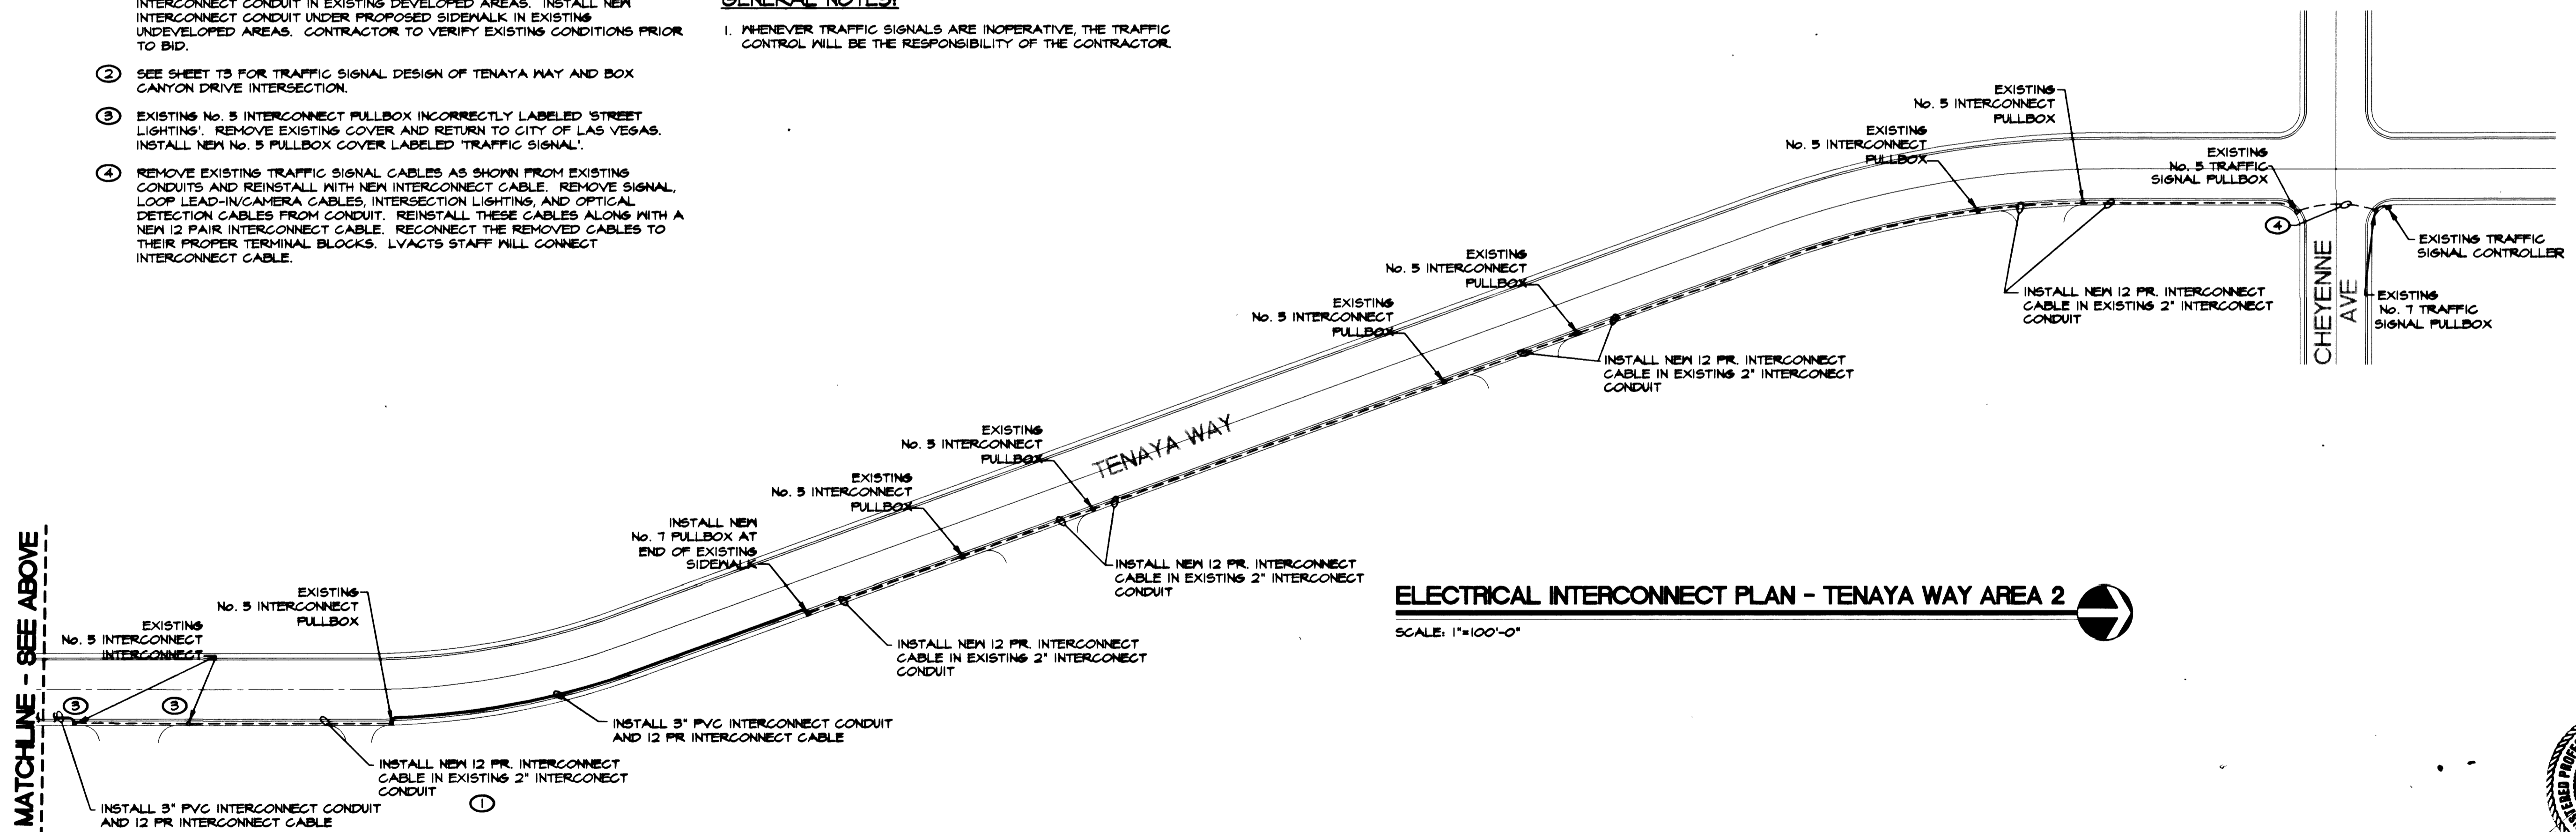

ELECTRICAL INTERCONNECT PLAN - TENAYA WAY AREA 2
SCALE: 1"=100'-0"

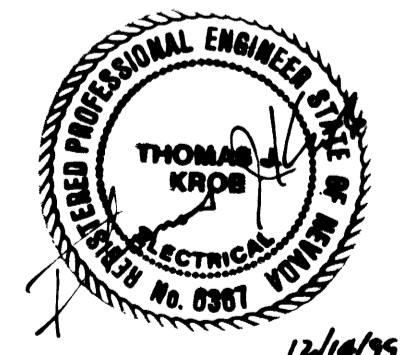

12/14/99

107-V-3118

NO.	REVISIONS	DRAWN	APPROVED	DATE

TKROB CONSULTING ENGINEERS, INC.

7151 CASCADE VALLEY COURT
SUITE 200
LAS VEGAS, NEVADA 89128
(702) 871-3621
ELECTRICAL ENGINEERING

DESIGNED: HRW
DRAWN: SLP/JGC
CHECKED: HRW
APPROVED: HRW
JOB #: 913/SITE4
DATE: 6/17/99

Stanley Consultants inc.
1771 EAST FLAMINGO ROAD, SUITE 104-B
LAS VEGAS, NEVADA 89119 (702) 369-9396

A Stanley Group Company
Engineering, Environmental
and Construction Services
Worldwide

CITY OF LAS VEGAS, NEVADA
DEPARTMENT OF PUBLIC WORKS
400 EAST STEWART AVE.
LAS VEGAS, NEVADA 89101 (702) 229-6535

**ELECTRICAL INTERCONNECT PLAN
TENAYA WAY**

SCALE: AS SHOWN
NO. 14164
REV. **T4**
30 of 42