

CONSTRUCTION NOTES

- ③ "JO" 162+79.93 (83.31' LT) TO "JO" 165+79.64 (43.09' LT) CONSTRUCT AC PAVEMENT SECTION
6" AC ON 15" CLARK COUNTY TYPE II AGGREGATE BASE

GENERAL CONSTRUCTION NOTES


1. CONTRACTOR SHALL RELOCATE EXISTING FENCE AS NECESSARY TO CONSTRUCT THE JONES BOULEVARD IMPROVEMENTS AS SHOWN ON THE TYPICAL SECTIONS.
2. SAWCUT EXISTING PAVEMENT TO NEAT LINE.
3. CONTRACTOR SHALL BE RESPONSIBLE FOR EARTHWORK REQUIRED TO CONSTRUCT JONES BOULEVARD TYPICAL SECTION.

L:\PROJECTS\642424\003\ES Ramp\Design\Roadway\124-Jones-Right.dwg, 08/15/03 05:49:47 PM

REV. NO.	DATE	DESCRIPTION	APPROVED
6/2/04			



JONES BOULEVARD-BELTWAY TO ELKHORN ROAD
JONES BOULEVARD RIGHT-TURN LANE
CONSTRUCTION PLAN
 CLARK COUNTY, NEVADA, DEPARTMENT OF PUBLIC WORKS

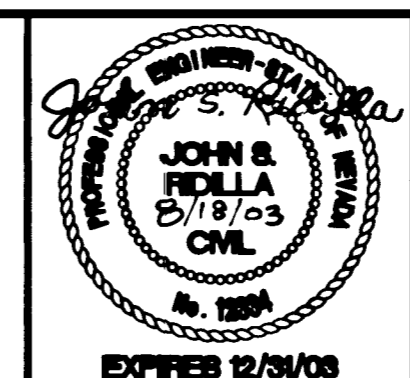

PROJECT No: 642424	DRAWN BY: JDS	SCALE
DESIGNED BY: JSR	CHECKED BY: MCM	HORIZ: 1"=20'
APPROVED BY: JJC		VERT: NONE
		FIELD BOOK
<small>840 ORRER DRIVE, SUITE 340 LAS VEGAS, NEVADA 89119 PHONE (702) 435-2119 FAX (702) 435-8412</small>		

DRAWING NO. /07-V3677
C-100
SHT. 76 OF