

QUANTITIES

SHEET NO. →

7 8 9 10 11 12 13

STREET IMPROVEMENTS:

NO.	LEGEND	DESCRIPTION	UNIT	TOTAL
1.		3 3/4" A.C. PAVE 1/4" TYPE 2, 9" TYPE 1* G.B.	S.Y.	6,188
2.		2" A.C. PAVE 1/4" TYPE 2, 6" TYPE 1* G.B.	S.Y.	8,300
3.		STD. "L" TYPE CURB & GUTTER 1/6" TYPE 1* G.B.	L.F.	5,146
4.		6" CONC. SIDEWALK 1/5" TYPE 2 G.B.	S.F.	5,531
5.		3'5" CONC. SIDEWALK 1/5" TYPE 2 G.B.	S.F.	8,875
6.	**	CONC. DRIVEWAY 1/8" TYPE 2 G.B.	S.F.	4,515
7.		6" VALLEY GUTTER 1/10" TYPE 1* G.B.	S.F.	842
8.		8" VALLEY GUTTER 1/10" TYPE 1* G.B.	S.F.	1,253
	*	NOTE: NATIVE MATERIAL TO BE USED IN LIEU OF IMPORTED TYPE 1.		
	**	NOTE: FINAL DRIVEWAY QUANTITY TO BE DETERMINED FROM THE MODEL SCHEDULE SHOWN ON THE PLOT PLAN. QUANTITIES SHOWN ARE APPROXIMATE. IT IS BASED ON A 26' BTM. PLUS 4' X WIDTH OF SIDEWALK.		

TOTALS BY SHEET

WATER:

1.		STD. F.H. 1/6" G.V. & 6" A.C.P. LATERAL	EA.	3
2.		6" A.C.P.	L.F.	2,094
3.		6" GATE VALVE W/ VALVE BOX & COVER	EA.	
4.		3/4" SERVICE	EA.	43
5.		METER BOX	EA.	43
6.		5/8" METER (INSTALLATION BY L.V.V. W.D.)	EA.	43

SEWER:

1.		STD. MANHOLE	EA.	6
2.		8" P.V.C.	L.F.	1,808
3.		4" P.V.C. LATERAL	L.F.	1,232

STREET LIGHTS:

1.		250W. HPS LUMINAIRE W/ CONCRETE POLE	EA.	9
2.		100W. HPS LUMINAIRE W/ CONCRETE POLE	EA.	10
3.		#3 1/2 PULL BOX W/ METER COVER	EA.	5

MISCELLANEOUS:

1.		6" D-3 STREET NAME SIGN	EA.	4
2.		30" STD. STOP SIGN	EA.	1
3.		STD. CLV BARRICADE	EA.	2

NOTE TO CONTRACTOR

QUANTITIES SHOWN ARE ESTIMATES ONLY AND ARE INTENDED TO ILLUSTRATE SCOPE OF WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE EXACT QUANTITIES INVOLVED.

LEWIS HOMES OF NEVADA

LAKESHORE ESTATES NO. 2 BY LEWIS HOMES



ESTIMATE OF QUANTITIES

SHEET

6

OF 13 SHEETS

G. C. WALLACE
Consulting Engineers, Inc.
1100 East Sahara Ave. • Las Vegas, Nevada 89104 • 732-3330

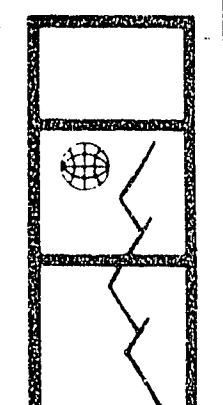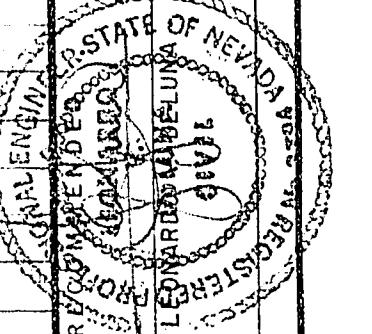

JOB NO. 5543.8650