
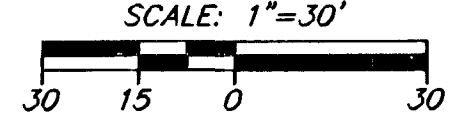


CITY OF LAS VEGAS
OR: 90258833.0004
APN: 139-34-501-008
"BUS STATION"

CITY OF LAS VEGAS
OR: 20020514.00682
APN: 139-34-501-007
"POST OFFICE"

CITY OF LAS VEGAS
OR: 20020514.00682
APN: 139-34-501-004
"FRANK LLOYD WRIGHT PARK"

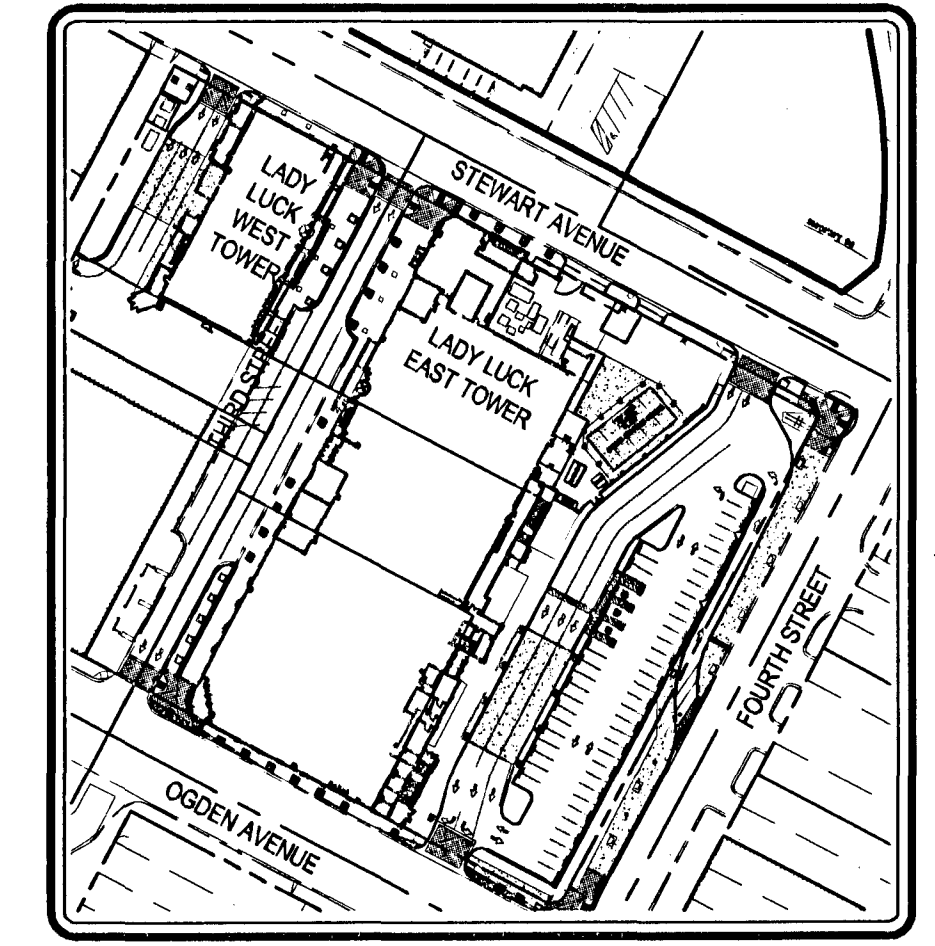

NOTE
ALL STREETLIGHTS TO BE RETROFITTED TO MEET DOWNTOWN CENTENNIAL STANDARDS

PLANT LEGEND	SYMBOLS DESCRIPTIONS	QTY
PLANTS	MEXICAN FAN PALM - SKINNED (Washingtonia robusta)	22
	MEDITERRANEAN FAN PALM (Chamaerops humilis) 36" box	7
	SOUTHERN LIVE OAK (Quercus virginiana) 36" box	23
	EXISTING OAKS	
SHRUBS	EXISTING DATE PALMS	
	COMPACT MYRTLE (Myrtus communis 'compacta') 15 gal.	202
GROUNDCOVERS	XYLOSMA (Xylosma congestum) 15 gal.	137
	FORTNIGHT LILY (Diets bicolor) 5 gal.	245
	TRAILING ROSEMARY (Rosmarinus officinalis 'prostratus') 5 gal.	250

NOTES:
 1. minus 'Palomino Gold' rock throughout all planter areas. (9,470 sq. ft.)
 2. Seasonal Annuals (1,230 sq. ft.)
 3. Decorative Pot w/ 15 gal. Accent (2 qty.)

IRRIGATION LEGEND	SYMBOLS DESCRIPTIONS
VALVES	1 1/2" DRIP VALVE - Per "Control Zone Kit" Detail
	(2 qty) 4" SLEEVE / Sch. 40 - Per "Sleeve Installation" Detail
PIPING	1 1/2" RPPA
	END CAP
EQUIPMENT	EXISTING METER
	CONTROLLER
EMITTERS	1/2" SALCO COATED DRIP LINE/H SERIES EMITTERS - SHRUBS
	1/2" SALCO COATED DRIP LINE/H SERIES EMITTERS - TREES/PALMS
1 1/2" MAIN LINE - SALCO	

- NOTES:**
- DISCREPANCIES BETWEEN THE DRAWINGS AND SITE SHALL BE BROUGHT TO THE ATTENTION OF THE LANDSCAPE ARCHITECT FOR CLARIFICATION BEFORE STARTING WORK.
 - CONTRACTOR SHALL VERIFY ALL EXISTING SITE CONDITIONS PRIOR TO STARTING WORK.
 - LOCATE ALL UNDERGROUND UTILITIES PRIOR TO DIGGING AND PROTECT.
 - IRRIGATION PLANS ARE GENERALLY DIAGRAMATIC AND ARE INTENDED TO GIVE APPROXIMATE LOCATIONS OF LINES, CONTROL VALVES AND OTHER COMPONENTS WHICH MAY BE ALTERED.
 - ANY AND ALL MATERIAL OR EQUIPMENT SUBSTITUTIONS TO BE APPROVED BY NETCO.
 - CONTRACTOR SHALL INSURE 100% COVERAGE TO ALL PLANTS PER EMITTER LAYOUT.
 - ALL SLEEVES SHALL BE INSTALLED PER PLANS PRIOR TO THE COMMENCEMENT OF PAVING.
 - LANDSCAPE CONTRACTOR SHALL PERFORM ALL PRESSURE TESTS INDICATED IN THE SPECIFICATIONS.

EMITTER SCHEDULE:	CONTAINER SIZE	# OF EMITTERS	EMITTER TYPE
PALM	8"	8	2 GAL/HR
48" BOX	8"	2	2 GAL/HR
36" BOX	6"	2	2 GAL/HR
24" BOX	4"	2	2 GAL/HR
15 GALLON	2"	2	2 GAL/HR
5 GALLON	2"	1	1 GAL/HR
1 GALLON	2"	2	1 GAL/HR

PROJECT TEAM:

DEVELOPER: RESORT OPERATIONS GROUP
206 NORTH THIRD STREET 3RD FLOOR
LAS VEGAS, NEVADA 89101

CIVIL ENGINEER: CARDNO WRG
10649 JEFFREYS STREET
HENDERSON, NEVADA 89052
PHONE: 702-298-9300
CONTACT: DAVID LOGSDON II

GENERAL CONTRACTOR: BRESLIN BUILDERS
5525 POLARS AVENUE SUITE B
LAS VEGAS, NEVADA 89118
PHONE: 702-798-3977

NOTE
TREES WITHIN SVRZ 2" MINIMUM SINGLE TRUNK WITH CANOPIES AT 7' MINIMUM ONLY


NOTE
ALL IRRIGATION PIPING IS 1-1/2" PVC

THE UNDERGROUND UTILITIES AS SHOWN HEREON HAVE BEEN LOCATED FROM OBSERVED FIELD SURVEY EVIDENCE AND EXISTING DRAWINGS, INCLUDING BUT NOT LIMITED TO THE FOLLOWING: PLANS PROVIDED BY THE CLIENT, UTILITY COMPANIES, AND MUNICIPAL AGENCIES. THE SURVEYOR MAKES NO GUARANTEES THAT THE UNDERGROUND UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. THE SURVEYOR FURTHER DOES NOT WARRANT THAT THE UNDERGROUND UTILITIES SHOWN ARE IN THE EXACT LOCATION INDICATED ALTHOUGH HE DOES CERTIFY THAT THEY ARE LOCATED AS ACCURATELY AS POSSIBLE FROM INFORMATION AVAILABLE. THE SURVEYOR HAS NOT PHYSICALLY LOCATED THE UNDERGROUND UTILITIES.

Cardno WRG
LAS VEGAS
10649 JEFFREYS ST. HENDERSON, NV 89052
TEL: (702) 960-9300 FAX: (702) 960-9305
WWW.CARDNOWRG.COM
PLANNERS • ENGINEERS • LANDSCAPE ARCHITECTS • SURVEYORS

STREETLIGHTING-LANDSCAPE-IRRIGATION PLAN
LADY LUCK RENOVATION & EXPANSION
BRESLIN BUILDERS
CITY OF LAS VEGAS, NEVADA

NO.	DATE	DESCRIPTION

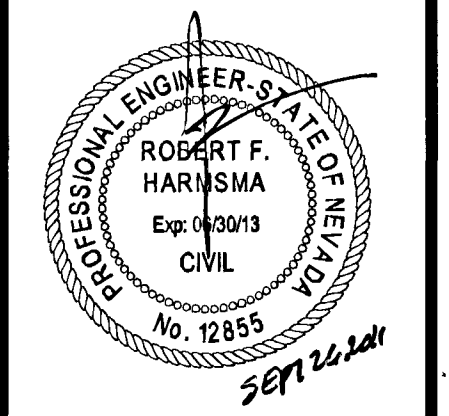

DATE: 1/2011-05-12
DRAWN: I RAS
DESIGNED: I RAS
CHECKED: I DML
PROJECT#: 13108349000

SHEET TITLE: ST LT-LS-IRRG
SHEET NUMBER: 8 OF 8

CLV DWG #

NOTE:
CONTRACTOR TO LOCATE ALL EXISTING CONDUITS IN SIDEWALK/LANDSCAPE AREAS OF RIGHT OF WAY PRIOR TO CONSTRUCTION OF TREETWELLS

- STREETLIGHT CONSTRUCTION NOTES:**
- EXISTING STREETLIGHT TO BE RELOCATED AND/OR RETROFITTED TO CONFORM TO THE DOWNTOWN CENTENNIAL PLAN US 303-DC/TC AND 304-DC-TC (INCLUDING ALL CONDUIT & FIBER OPTICS)
 - EXISTING STREETLIGHT TO BE RELOCATED (INCLUDING ALL CONDUIT & FIBER OPTICS). STREETLIGHT CONFORMS TO DOWNTOWN CENTENNIAL PLAN US 304-DC/TC

Call before you Dig
1-800-877-2892
www.811.com

Call before you Overhead
1-702-593-4111

Handwritten notes: *120045*, *10/10/2011*, *10/10/2011*

107V5682 H# 39397