


- REMOVAL NOTES**
- 1 SAWCUT AND MATCH EXISTING
 - 2 REMOVE BITUMINOUS SURFACE
 - 4 REMOVE CONCRETE SIDEWALK\SIDEWALK RAMP
 - 11 REMOVE CURB
 - 17 REMOVE CONCRETE DRIVEWAY
 - 21 REMOVE RETAINING WALL
 - 27 REMOVE EXISTING BLOCK WALL
 - 28 REMOVE PARKING STRIPE
 - 29 REMOVE FENCE
- CONSTRUCTION NOTES**
- 1 CONSTRUCT 3" PBS OVER 4" AGGREGATE BASE
 - 2 CONSTRUCT CONCRETE SIDEWALK PER USD NO. 234
 - 8 CONSTRUCT CONCRETE RETAINING WALL SEE BW SHEETS
 - 11 CONSTRUCT "A" TYPE CURB PER USD NO. 219
 - 28 CONSTRUCT SIDEWALK DRAIN PER USD NO. 236
 - 29 POUR CONCRETE PAD WITH DRIVEWAY. 6" PCC OVER 6" AGGREGATE BASE. SEE USD NO. 224 FOR ADDITIONAL DETAILS.
 - 30 CONSTRUCT BLOCK WALL PER SOUTHERN NEVADA BUILDING STANDARDS NO. B-100-1
 - 31 REPLACE DECORATIVE BLOCK WALL IN KIND
 - 32 CONSTRUCT 4" PAINTED PARKING STRIPE
 - 33 INSTALL PRECAST BUMPER BLOCK PER USD NO. 238
 - 34 RELOCATE EXISTING FENCE BEHIND SIDEWALK

- LEGEND**
- BITUMINOUS SURFACE REMOVAL AND REPLACEMENT
 - CONCRETE SURFACE REMOVAL AND REPLACEMENT

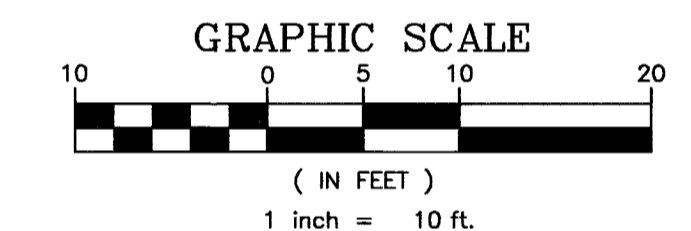

- NOTES:**
- SEE LANDSCAPE PLANS FOR OFF SITE LANDSCAPE IMPROVEMENTS AND ALL TREE REMOVAL AND/OR TREE RELOCATIONS.
 - SEE UTILITY PLANS FOR ALL ON-SITE AND OFF-SITE UTILITY IMPROVEMENTS.
 - SEE ROADWAY PLAN AND PROFILES FOR CURB ELEVATIONS.
 - SEE STRUCTURE PLANS FOR CONCRETE RETAINING WALLS AND DETAILS.
 - PRIVATE LIGHT RELOCATIONS SHALL BE PLACED ON CONCRETE FOUNDATION AND INSTALLED PER SOUTHERN NEVADA BUILDING OFFICIALS DETAIL NO. E-101.

SNWA NOTES

ALL REPAIRS, REPLACEMENTS, RELOCATIONS AND/OR EXTENSIONS MUST BE DESIGNED AND MONITORED BY A NACE INTERNATIONAL-CERTIFIED CATHODIC PROTECTION SPECIALIST. ALL TESTING AND WORK IS TO BE DONE BY A NACE LEVEL II CATHODIC PROTECTION TECHNICIAN AND APPROVED BY THE SNWA CATHODIC PROTECTION TECHNICIAN PRIOR TO ACCEPTING THE INSTALLATION. ALL MATERIAL FOR THE INSTALLATION IS TO BE PROVIDED BY THE CONTRACTOR. CONTRACTOR SHALL SUBMIT ALL CERTIFICATIONS AND MATERIALS TO BE USED ON THE PROJECT FOR THE REVIEW AND ACCEPTANCE BY SNWA PRIOR TO STARTING ANY WORK. SNWA FIBER OPTIC CONDUIT RUNS ALONG THE NORTH/EAST SIDE OF THE SNWA PIPELINE.

APPROVED FOR CONSTRUCTION

S. Disha 12/31/12 DATE
SOUTHERN NEVADA WATER AUTHORITY

SNWA APPROVAL IS VALID FOR ONE (1) YEAR FROM THE SIGNATURE DATE. IF CONSTRUCTION WITHIN THE EASEMENT OR RESTRICTED PIPE SAFETY ZONE IS NOT COMPLETE, PLANS MUST BE RESUBMITTED TO SNWA FOR APPROVAL.



REVISIONS

NO.	DATE	SHEET	DESCRIPTION	APP'D
1	11/14/12	DEL	INN LANE AND ISLAND PER CIV 30M	

**DEPARTMENT OF PUBLIC WORKS
CAPITAL PROJECT MANAGEMENT**

CITY ENGINEER: DAVID BOWERS, PE, PTOE
PROGRAM MANAGER: JEREMY LEAVITT, PE

DESIGNED BY: H. MILLER
DRAWN BY: H. MILLER
CHECKED BY: J. JENSEN

DATE: 08/12/2011

**VALLEY VIEW BOULEVARD
DESERT INN RD TO BONANZA RD
ON-SITE IMPROVEMENT PLAN**

TITLE: _____
SHEET: _____

APPROVED FOR CONSTRUCTION

JOSEPH G. JENSEN
Exp: 6/30/13
CIVIL

SHEET: **DG-10**
66 of 236
DRAWING NO. 107-V5627

P:\WORK\1020006\1020006.DWG VALLEY VIEW AND DESERT INN ROADWAY IMPROVEMENTS - 2012.DWG 2/14/12

VALLEY VIEW BLVD - DESERT INN RD TO BONANZA RD