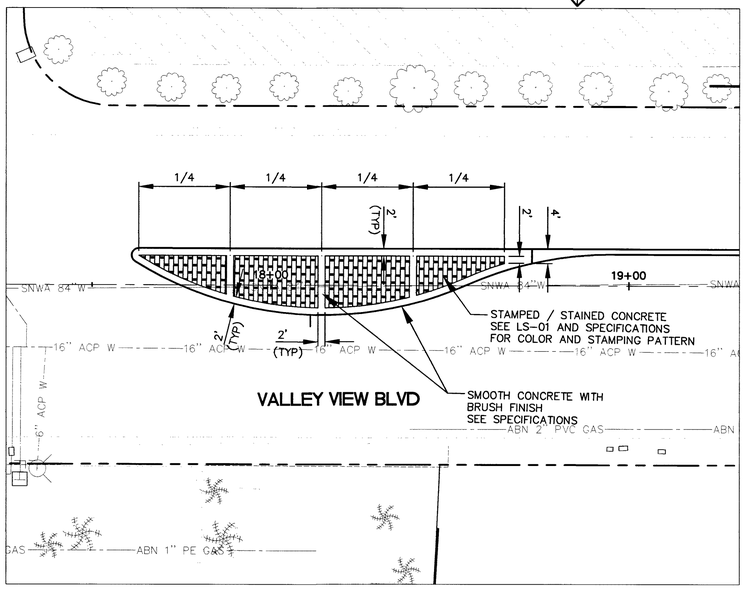

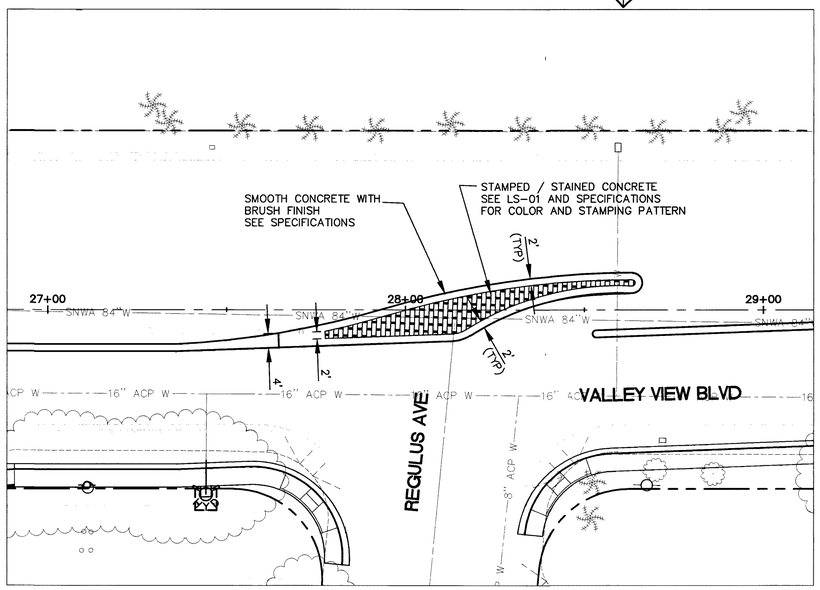

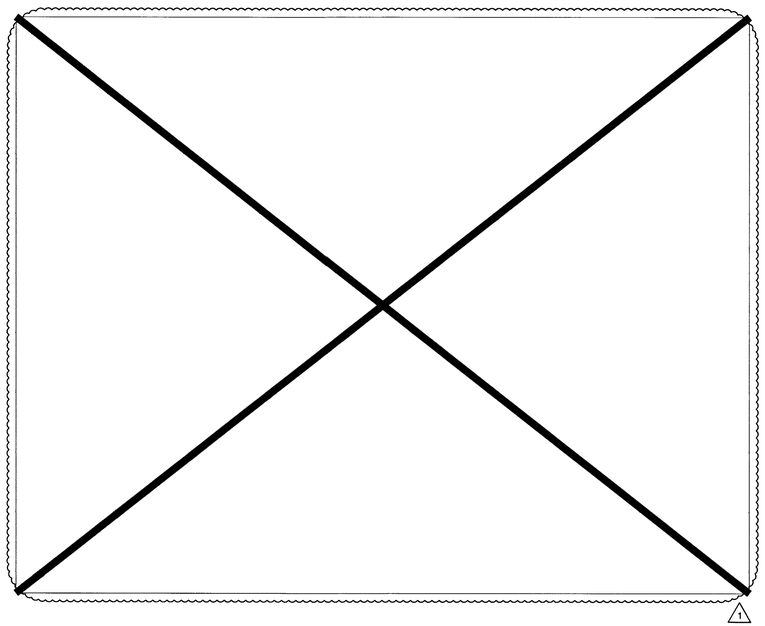

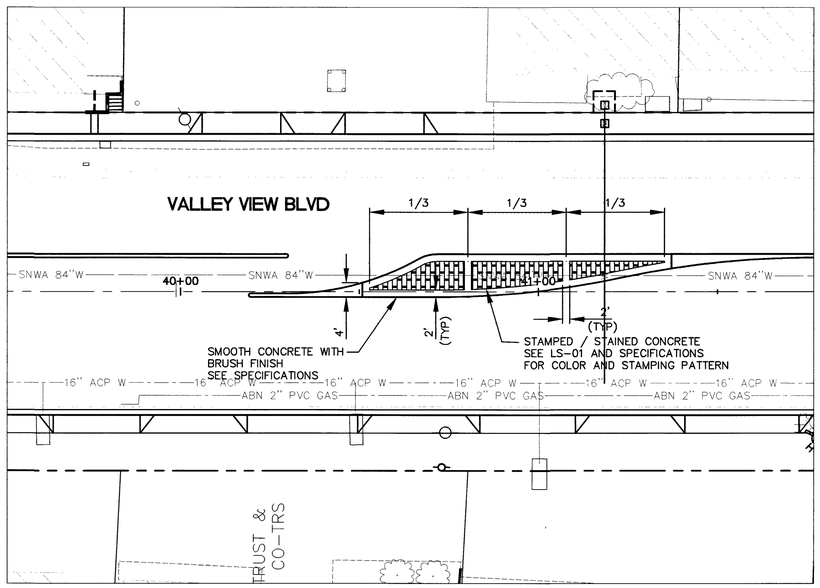

SNWA NOTES

ALL REPAIRS, REPLACEMENTS, RELOCATIONS AND/OR EXTENSIONS MUST BE DESIGNED AND MONITORED BY A NACE INTERNATIONAL–CERTIFIED CATHODIC PROTECTION SPECIALIST. ALL TESTING AND WORK IS TO BE DONE BY A NACE LEVEL II CATHODIC PROTECTION TECHNICIAN AND APPROVED BY THE SNWA CATHODIC PROTECTION TECHNICIAN PRIOR TO ACCEPTING THE INSTALLATION. ALL MATERIAL FOR THE INSTALLATION IS TO BE PROVIDED BY THE CONTRACTOR. CONTRACTOR SHALL SUBMIT ALL CERTIFICATIONS AND MATERIALS TO BE USED ON THE PROJECT FOR THE REVIEW AND ACCEPTANCE BY SNWA PRIOR TO STARTING ANY WORK.
SNWA FIBER OPTIC CONDUIT RUNS ALONG THE NORTH/EAST SIDE OF THE SNWA PIPELINE.

CAUTION: SNWA TEST LEADS ARE SHALLOW.

RELOCATION OF EXISTING SNWA TEST STATIONS MUST BE DONE IN ACCORDANCE WITH SNWA STANDARD PLATES FOR CATHODIC PROTECTION.

IF EXPOSED CONTRACTOR TO PAY FOR AND REPLACE SNWA CATHODIC PROECTION TEST STATION GROUND MATS, MAGNESIUM RIBBONS, OR ZINC RIBBONS WITH NEW GROUND MATS, MAGNESIUM RIBBONS, OR ZINC RIBBONS.

CONTRACTOR SHALL FIELD LOCATE AND PROTECT ALL SNWA/SNWS APPURTENANCES INCLUDING, BUT NOT LIMITED TO AV/AR, ACCESS MANWAYS AND CATHODIC PROTECTION SYSTEMS. ALL ABOVE GROUND STRUCTURES AND AT GRADE STRUCTURES MUST BE ADJUSTED TO NEW GRADE AT CONTRACTOR'S EXPENSE. CATHODIC PROTECTION TEST STATIONS, RECTIFIERS, AND AV/AR'S MUST BE RELOCATED TO THE SIDEWALK PER SNWA STANDARDS AND AT THE CONTRACTOR'S EXPENSE. CONTRACTOR TO NOTIFY SNWA DEVELOPMENT PLAN REVIEW AT (702) 862–3444 AT LEAST 48 HOURS PRIOR TO CONSTRUCTION ACTIVITY.

APPROVED FOR CONSTRUCTION

SOUTHERN NEVADA WATER AUTHORITY — DATE 12/31/12

SNWA APPROVAL IS VALID FOR ONE (1) YEAR FROM THE SIGNATURE DATE. IF CONSTRUCTION WITHIN THE EASEMENT OR RESTRICTED PIPE SAFETY ZONE IS NOT COMPLETE, PLANS MUST BE RESUBMITTED TO SNWA FOR APPROVAL.

APPROVED FOR CONSTRUCTION

1ST APPROVAL 11/02/11

LVVWD ENGINEERING SERVICES MANAGER — DATE 01/08/13
PROJECT NO. 116494

NOTES

1. DISTURBED LANDSCAPING ALONG EDGE OF ROADWAY SHALL BE RESTORED TO ORIGINAL CONDITION. SEE HS PLANS.
2. SEE LS–01 FOR PLANTING LEGEND.
3. SEE LS–01 FOR PLANTING NOTES.
4. SEE LS–01 FOR CONCRETE STAINING AND STAMPING NOTES.
5. SEE CIVIL PLANS FOR MEDIAN ISLAND SIZE AND LOCATION.
6. BOULDERS AND PLANTS SHALL BE PLACED A MINIMUM OF 3' FROM RPPA AND IRRIGATION CONTROLLER PEDESTAL.
7. NO TREES OR DEEP ROOTED SHRUBS SHALL BE PLANTED OR PLACED IN THE SNWA EASEMENT.
8. NO TREES OR DEEP ROOTED SHRUBS SHALL BE PLANTED OR PLACED OVER EXISTING OR PROPOSED LVVWD WATER LINES.
9. CONCRETE MEDIAN ISLAND SHALL BE 4" CONCRETE (STAINED/STAMPED WHERE APPLICABLE) OVER 2" AGGREGATE BASE, PER USD NO. 220.

GRAPHIC SCALE
20 0 10 20 40
(IN FEET)
1 inch =20 ft.

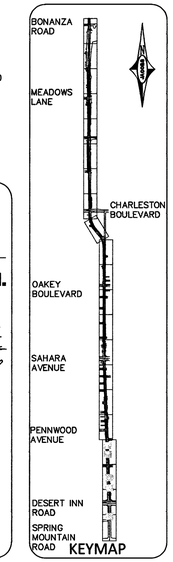

FOR CONNECTION TO LVVWD FACILITIES ONLY

FAST
Call before you UnderGround.
1-702-432-5300
AVOID HITTING OVERHEAD POWER LINES. IT'S COSTLY.
CALL BEFORE YOU DO OVERHEAD
1-702-227-2929
Call before you D g!
Avoid cutting underground utility lines. It's costly.
Call 811
or
1-800-227-2800

REVISIONS

NO.	DATE:	SHEET	DESCRIPTION	APP'D
1	10/30/12	DEL	JRN LANE AND ISLAND PER CL/ ROW	

VALLEY VIEW BLVD – DESERT INN RD TO BONANZA RD

DEPARTMENT OF PUBLIC WORKS
CAPITAL PROJECT MANAGEMENT

CITY ENGINEER: DAVID BOWERS, PE, PTOE
PROGRAM MANAGER: JEREMY LEAVITT, PE
DESIGNED BY: H. MILLER
DRAWN BY: H. MILLER
CHECKED BY: J. JENSEN
DATE: 08/12/2011

TITLE: VALLEY VIEW BOULEVARD
DESERT INN RD TO BONANZA RD

SHEET: PLANTING PLAN
MEDIAN ISLAND PLANTING

REGISTERED LANDSCAPE ARCHITECT HAROLD MILLER JR. 631 12/19/12 Expires: 06/30/13 STATE OF NEVADA

SHEET: LS-02
190 of 236
DRAWING NO. 107-V5627

HANSEN NO. 38600 BID NO. 11.1730.05

PROFESSIONAL ENGINEER STATE OF NEVADA JOSEPH G. JENSEN Exp:6/30/13 CIVIL NO. 5597

P:\V5627\MASS000 CLV VALLEY VIEW AND JONES\700_CAD\710_LANDSCAPE\SHEETS\VVB_A_LS01-2000_ALC.DWG
12/19/12