

**City of Las Vegas
General Notes**

- All construction and materials shall be in accordance with the "Uniform Standards Specifications for Public Works Construction Off-Site Improvements, Clark County Area Nevada", latest issue, the "Uniform Standard Drawings for Public Works Construction, Clark County Area Nevada", latest revised edition and other applicable approved standards issued by the controlling agency; the Uniform Building Code, and all local city codes and ordinances applicable, except as noted on this sheet as "Deviations from Standards".
- The existence and location of any overhead or underground utility lines, pipes, or structures shown on these plans are obtained by a research of the available records. Existing utilities as shown from CLV Plans Library are approximate and for record purposes. Existing utilities are located on plans only for the convenience of the Contractor. Existing utility service laterals may not be shown on the plans. The Contractor shall, at his own expense, locate all underground and overhead interference which may affect his operation during construction and shall take all necessary precautions to avoid damage to same. The Contractor shall use extreme caution when working near overhead utilities so as to safely protect all personnel and equipment, and shall be responsible for all cost and liability in connection therewith.
- The Contractor shall take all precautionary measures necessary to protect existing utility lines, structures and street improvements which are to remain in place, from damage, and all such improvements or structures damaged by the Contractor's operations shall be repaired or replaced satisfactory to the City Engineer and owning utility company at the expense of the Contractor.
- All construction shall be as shown on these plans, any revisions shall have the prior written approval of the City Engineer.
- Type V cement shall be used in all off-site concrete work. Concrete to be 3000 P.S.I. minimum @ 28 days. Mix designs to be approved by the City, prior to the use on the project.
- Permits are required for any work in the public Right-of-Way. The Contractor shall secure all permits and inspections required for this construction.
- Expansion joints required, maximum every 300' in extruded-type curb.
- AC pavement to be one-half inch (1/2") above lip of all gutters after compaction, except at sidewalk ramps and cross gutters.
- Curb and gutter found to be unacceptable to the City of Las Vegas shall be removed and replaced per standard drawing 216.
- Sidewalk ramps shall be constructed in each quadrant of an intersection per standard drawing 235. Exact location of ramps may be adjusted in the field by a City Inspector.
- Contractor shall provide all necessary horizontal and vertical transitions between new construction and existing surfaces to provide for proper drainage and for ingress and egress to new construction. The extent of transitions to be as shown on plans.
- All grading work shall conform to the soils report as prepared by the soils engineer approved by City engineer, and as shown on these plans.
- Exact location of all sewer lines may be adjusted or determined in the field by a City of Las Vegas Engineer if location on plans is not clearly shown, or existing pavement condition requires relocations.
- The Contractor shall take all precautions necessary to protect existing permanent survey monuments. Any monuments disturbed shall be replaced and adjusted per available records in accordance with N.R.S. Statute No. 625.550.
- Utility company meter boxes, manhole lids, valve cover, etc., shall be located out of driveways, driveway aprons, flowlines, and cross gutters unless written approval is granted by the utility company and the city engineer.
- Wall Note:
- All walls, new or existing, are only shown on civil plans for the purpose of reviewing grading relationships; flood control and site distance of intersections. New walls require a separate permit and inspection by the Building Department.
- Asphalt mix design must be submitted and approved by the City Engineer prior to the placement of Asphalt within City Right of Way.
- Contractor shall adjust all new and existing inlets, valve boxes, manhole rims, and sewer clean outs, etc. to finish grade as applicable whether or not they are shown on plans.
- Materials, handling and placement of Portland Cement Concrete shall be in accordance with applicable sections of NDOT or the Clark County Area Specifications (as applicable) and the plans and details shown hereon.

City of Las Vegas Traffic Notes

- All construction signing, barricading, and traffic delineation shall conform to the "Manual on Uniform Traffic Control Devices", Latest Edition.
- The Street Sign Contractor shall obtain street names and block numbering from the Planning Department prior to construction.
- Before any work is started in the right of way, the Contractor shall install all advance warning signs for the construction zones. The contractor shall install temporary stop signs at all new street encroachment into existing City street where warranted immediately after grading work is accomplished, and shall maintain said signs until permanent signs are installed.
- When a designated "Safe Route to School" is encroached upon by a construction work zone and Public Works Staff identifies a need for students to be assisted in the safe crossing through the work zone, the contractor shall be required to provide a qualified "crossing guard". The guard shall be present for the full duration of time that the children are likely to be present.
- If the improvements necessitate the obliteration, temporary obstruction, temporary removal or relocation of any existing traffic pavement marking, such pavement marking shall be restored or replaced with like materials to the satisfaction of the City Traffic Engineer.
- The contractor shall be responsible for providing and installing all permanent signs shown on the plans. Street name signs shall conform in their entirety to current City Standards. All other signs shall be standards size unless otherwise specified on the plans. All sign posts shall be installed in accordance with the current City Standards.
- When a proposed Street Light Standard is located within five (5) feet of any proposed sign shown on the plans to be mounted on a signpost, the sign shall be mounted on the Street Light Standard and the sign post shall be eliminated.
- All permanent traffic control devices called for hereon shall be in place and in final position prior to allowing any public traffic onto the portions of the road(s) being improved hereunder, regardless of the status of completion of paving or other off-site improvements called for on these plans.
- Street signs and stop signs shall be installed per city standard specifications for placement of street name signs.
- The contractor shall provide all necessary traffic control devices and flaggers to ensure the safety of the public in or around the work area. The contractor shall have a certified ATSSA Traffic Control Technician or MSA Work Zone Safety Specialist set-up, maintain and/or remove all traffic control devices in the City of Las Vegas Right of Way.
- Work in the public streets, once begun, shall be expedited to completion so as to provide minimum inconvenience to adjacent property owners and to the traveling public.
- The contractor shall be responsible for notifying Citizen Area Transit (C.A.T.) if the construction interrupts or relocates a bus stop or has an adverse effect on bus service on that street to arrange for temporary relocation of stop.
- Guards shall be obtained by contacting the Metropolitan Police Department Special Events Unit (Phone No. 225-3442) who will provide officers properly trained in traffic control. Fees for the use of these officers shall be set up by Metro and will be paid by the Contractor. The contractor is responsible for all arrangements with Metro.
- Any work within 300 ft. of a signalized intersection will be night work, unless directed by the City of Las Vegas Traffic Engineer.

**City of Las Vegas
Grading Notes**

- In the event that any unforeseen conditions not covered by these notes are encountered during grading operation, the Owner/Engineer shall be immediately notified for direction.
 - It shall be the responsibility of the Contractor to perform all necessary cuts and fills within the limits of this project and the related off-site work, so as to generate the desired subgrade, finish grades and slopes shown.
 - Contractor shall take full responsibility for all excavation. Adequate shoring shall be designed and provided by the Contractor to prevent undermining of any adjacent features or facilities and/or caving of excavation.
 - The Contractor is warned that an earthwork balance was not necessarily the intent of the project. Any additional material required or leftover material following earthwork operations becomes the responsibility of the Contractor.
 - The Grading Contractor is responsible to coordinate with the owner to provide for the requirements of the project Storm Water Pollution Prevention Plan (SWPPP) and associated permit.
 - Contractor shall grade to the lines and elevations shown on the plans within the following horizontal and vertical tolerances and degrees of compaction, in the areas indicated:
- | | Horizontal | Vertical | Compaction |
|---------------------------|------------|----------------|------------------|
| A. Pavement Area Subgrade | 0.1'± | +0.0' to -0.1' | See Soils Report |
| B. Engineered Fill | 0.5'± | +0.1' to -0.1' | See Soils Report |
- Compaction Testing will be performed by the owner or his representative.
- All cut and fill slopes shall be protected until effective erosion control has been established.
 - The use of potable water without a special permit for building or construction purposes including consolidation of backfill or dust control is prohibited. The Contractor shall obtain all necessary permits for construction water.
 - The Contractor shall maintain the streets, sidewalks and all other public right-of-way in a clean, safe and useable condition. All spills of soil, rock or construction debris shall be promptly removed from the publicly owned property during construction and upon completion of the project. All adjacent property, private or public shall be maintained in a clean, safe and useable condition.
 - In the event that any temporary construction item is required that is not shown on these drawings, the owner agrees to provide and install such item at his own expense and at the direction of the City Engineer. Temporary construction includes ditches, berms, road signs and barricades, ect.

Deviation from Standards

None

**Las Vegas Valley Water District
Standard Notes**

LWVD PROJECT #H110064

- No work shall begin until the water plans have been approved for construction by the LWVD. Following water plan approval, notice shall be given to the LWVD Communication Support Center (258-7171) two (2) working days prior to the start of construction. For future inspections notice must be given by 2:00pm the business day prior to the requested LWVD inspection. When requesting inspections, please refer to the Project # identified above.
- All work shall conform to LWVD Standard Plans, Drawings, and Specifications, and to the 2003 Edition of the Uniform Design and Construction Standards for Portable Water Systems (UDACS).
- All work, except as modified by these plans or by Note 2 above, shall be done in accordance with the most recent draft or edition of the Uniform Standard Specifications for Public Works Construction Offsite Improvement, Clark County Area.
- A single pipe material shall be used throughout the project unless otherwise approved by the LWVD.
- All service laterals two (2) inches in diameter and smaller shall be Type K copper tubing with LWVD approved service saddles.
- All water meter boxes shall be located outside of driveway areas.
- All valves shall be located outside of driveways, valley and curb gutters.
- All water and storm drain or sanitary sewer crossings shall conform to Section 2.19 of the 2003 Edition of the UDACS.
- All water facilities shall be filled, disinfected, pressure tested, flushed, filled, and an acceptable water sample obtained, prior to connection to the LWVD distribution system.
- The contractor must obtain all meters two (2) inches and smaller from LWVD Central Stores. Telephone 258-3152 or 258-3802, two (2) working days prior to meter pickup.
- Any interruption of service must be approved by the LWVD Inspection Division prior to shutdown. Proper written notification must be given to all affected customers.
- All water facility construction materials used must be as listed on the LWVD Pre-Approved Materials and Manufacturer's Listing for New Facilities, latest revision, or specifically approved on these plans.
- Telephone "Call Before You Dig" at 1-800-227-2600.

City of Las Vegas Streetlight Notes

- All street lighting installations shall be in accordance with the street lighting plans, the "Uniform Standards Specifications for Public Works Construction Off-Site Improvements, Clark County Area, Nevada", Latest Revision.
- No deviation of street light, pull box, conduits (etc.) locations shall be permitted without written approval of the Traffic/Electrical Field Operations Division and the City Engineer. Any deviation from the plan location will require compliance with section 623.10.03 (e) of the specifications.
- All existing street lighting shall remain operational during construction.
- All empty conduit shall have pull strings installed prior to final inspection.
- Any structure such as block walls, chain link fences, retaining walls, etc. shall leave a minimum clearance of eighteen inches (18") to the face of street lighting pole on all sides when street light is installed behind sidewalk, and shall at no time completely enclose the street lighting pole.
- As-built drawings shall be supplied to the Electrical Services Section prior to any pre-final inspection. The as-built drawing needs to be stamped as-built and signed by the preparer.
- Service point shall be coordinated with Nevada Power Company, and wherever possible, be located near the center of the circuit. Service points shall be shown on the plans.
- It shall be assumed that in the absence of an existing, workable circuit to attach to, all installations shall require a new service for operation of the circuit.
- Wherever there is an overhead utility that may conflict with the installation of street lighting circuits and/or poles, these conflicts must be resolved between the developer and the utilities involved before streetlight bases are installed at no expense to the City of Las Vegas.
- The contractor shall furnish complete service to transformers and control systems if required on plans.

Basis of Bearings

North 00°32'07" East, being the bearing of the east line of Section 17, T20S, R60E, M.D.M. as shown by map thereof on file in File #4, Page 09 of Parcel Maps, in the Clark County Recorder's Office, Clark County, Nevada.

Benchmark

Rivet with Washer at the Northwest Corner of Deer Springs Way and Riley Street.
Elevation = 2543.29 (775.1977 meters)
Published by Las Vegas City as Benchmark No. 8LV90 20EA (NAVD 88 Datum)

**City of Las Vegas
Fire Department Notes**

- All work shall be done in strict accordance with the City of Las Vegas Fire Department's Ordinance # 5667, "Hydrant Specifications", and "Hydrant Installation Specification".
- Authorized fire hydrants for this project are:
 - Kennedy - Guardian models K81A and K81D
 - Muller - Super Centurion 250 model A-423
 - Clow - Medallion model F-2548LVD
 - U.S. Pipe - Metroflow/M-03
 - Troy Valve - Patriot model PT8100N Nevada Hydrant
- On any residential or commercial installations fire hydrants shall be installed and fire apparatus access roads shall be maintained before commencement of any combustible construction. All fire hydrants shall be in good working order and shall be capable of delivering the required fire flow.
 - To identify the fire hydrant locations, contractor shall place a blue reflective marker at the center line of street adjacent to the fire hydrants as required by Ordinance #5667.
- All underground inspections, pressure and flushverifications of all fire hydrants and fire lines, shall be conducted before covering the lines. Call the City of Las Vegas Inspection Hot-line at 229-2071 to request an inspection by the City of Las Vegas Fire Department.
- Painting of the curbs and fire hydrants and all other work necessary as required by Ordinance # 5667, for the protection of fire hydrants from physical damage, shall be completed before approval by the City of Las Vegas Fire Department.
- A permit is required from the City of Las Vegas Fire Department for the on-site water lines and fire hydrants. The permit and contractor's material and test certificate for underground piping form shall be obtained from the Fire Protection Engineer before commencement of work.
- Private fire hydrants shall be painted red.
- Prior to the final occupancy, a flow test must be witnessed by the City of Las Vegas Fire Department to verify availability of the required fire flow.
- All on-site underground water mains and materials shall be U.L. listed, A.W.W.A. approved, and shall be rated for the appropriate working pressure.
- Fire hydrants spacing shall be:
 - Residential - 500 feet unsprinklered; 600 feet sprinklered.
 - Commercial - 300 feet unsprinklered; 400 feet sprinklered.
- Where new water mains are extended along streets or new streets are installed where fire hydrants are not needed for protection of the structures, fire hydrants shall be installed at maximum 1,000 foot spacing, to provide for transportation hazards. Where streets are provided with median dividers or have four or more traffic lanes and have a traffic count of more than 30,000 per day, hydrants are required on each side of the street spaced at 500 feet on an alternating basis.
- No fire hydrants shall be located within the required radius of a cul-de-sac or within 20 feet of the perimeter of the radius of the cul-de-sac.
- No fire hydrants shall be located within 6 feet of any curb return, driveway, power pole, streetlight or any other obstruction.
- The maximum distance from a fire hydrant to a one-two family dwelling shall not exceed 300 feet, as measured by an approved route.
- The maximum distance from a fire hydrant to a Fire Department Connection (FDC) shall not exceed 100 feet, as measured by an approved route.
- The maximum distance from a fire hydrant to the end of a dead-end street shall not exceed 200 feet.
- Two sources of supply are required whenever there are 4 or more fire hydrants/sprinkler lead-ins are installed on a single system. Sectional control valves shall be installed so that no more than 2 fire hydrants can be out of service due to a break in a water main.
- All fire apparatus access roads shall be paved to provide all-weather driving capabilities, and shall be designed and maintained to support the imposed loads of the fire apparatus.
- The gradient for the fire apparatus access roads shall not exceed 12%. Angles of approach and angles of departure shall not exceed 6% for 25 feet prior to or after the grade change. Adjacent to the structures gradient shall not exceed 6%.
- The turning radius of the fire apparatus access roads shall be no less than 52 feet outside and 28 feet inside turning radius.
- Vertical clearance of all fire apparatus access roads shall be not less than 13 feet 6 inches.
- Fire department access roads in all residential developments (except for the apartment buildings) shall have a minimum unobstructed width of not less than 36 feet flow line to the flow line (this width may be reduced to 24 feet, if all buildings fronting the street are sprinklered) for main residential streets, with parking permitted on both sides of the street. Private drive aisles, driveways, etc. shall be allowed to be reduced to a minimum width of 24 feet wide flow line to the flow line when serving no more than 6 residences, and when on street parking is disallowed.
- All fire apparatus access roads in commercial developments and apartment complexes shall have a minimum unobstructed width of not less than 24 feet (flow line to the flow line), provided no parking is allowed on either side; 32 feet (flow line to the flow line), if parallel parking is allowed on one side only; and 40 feet (flow line to the flow line), if parallel parking is allowed on both sides. These widths may be reduced by 4 feet if all buildings are sprinklered.
- A fire department access road shall extend to within 50 feet of a single exterior door providing access to the interior of the building.
- A fire apparatus access road shall be required when any portion of an exterior wall of the first story is located more than 150 feet from a fire department vehicle access. This distance could be increased to 250 feet if the building is sprinklered.
- Approved secondary fire apparatus access shall be provided for 100 or more dwelling units, roof(s) with dead-ends or with a single point of access in excess of 600 feet, and for all commercial, industrial, and multifamily residential developments.
- All dead-end fire apparatus access roads and or fire lanes, public or private, in excess of 150 feet in length shall be provided with an approved turn around area having a minimum diameter of 81 feet.
- All fire apparatus access roads shall be marked by placing approved signs at the start of the designated fire lane, one sign at the end of the fire lane and with signs at intervals 100 feet along all designated fire lanes. Signs to be placed on both sides of an access roadway if needed to prevent parking on either side. Signs to be installed no higher than 10 feet or less than 6 feet from roadway level. The curb along or on the pavement or cement if a curb is not provided shall be painted with a red weather resistant paint in addition to the signs.
- Electrically controlled access gates shall be provided with an approved emergency vehicle detector/receiver system. Said system shall be installed in accordance with the City of Las Vegas guidelines for Automatic Emergency Vehicle Access Gates.

City of Las Vegas Sewer Notes

- All construction and materials shall be in accordance with the latest edition of the Design and Construction Standards for Wastewater Collection Systems and the Uniform Standard Specifications for Public Works Construction Off-Site Improvements, Clark County Area, Nevada, as amended. It will be the responsibility of the Contractor to be aware of the contents of the above specifications.
- It shall be the Contractor's responsibility to perform construction as per plans. Any additions, deletions, or changes shall first meet with the approval of the City Engineer.
- Chisel "S" or "G" in curbs where sewer or gas laterals pass under the curb.
- Polyvinyl (PVC) sewer pipe shall meet ASTM D-3034 SDR 35 specifications, installed with sand bedding and backfill of type II aggregate base.
- All manholes paved in streets eighty (80') foot R/W and larger shall have concrete collars. Streets less than eighty (80') foot R/W will require retrofit if paving does not conform to city standards at the manhole.
- Tree saddles shall be used to connect sewer laterals to existing main lines up to twelve inch (12") diameter. Connections to fifteen inch (15") or larger mains shall require special procedures. In line "Y" shall be used on lines twelve inches (12") or above.
- Water mains shall be protected in accordance with LWVD Standards whenever a sewer main crosses over a water main or the sewer is less than eighteen inch (18") under a water main.
- All Contractors installing sewer mains that will be under the jurisdiction of the City of Las Vegas must be State of Nevada Class "A" Contractors.
- The City of Las Vegas will not accept any sewer mains which have a vertical deflection of more than one tenth (0.1) of a foot from the approved construction plans at any location. Sewer mains found to exceed this tolerance will have to be repaired or replaced to the satisfaction of the City Engineer prior to acceptance by the City of Las Vegas.
- Installation of curved sewer requires the use of C-900 PVC Pipe which allows for pipe deflection at the joints.

Estimate of Public Quantities

Streets	Type II Agg. Base	129	CY
A.C. Paving 5"	387	SY	
Curb & Gutter	841	LF	
ADA Ramps	13	EA	
Concrete Valley Gutter	2,344	SF	
Concrete Sidewalk	11,563	SF	
Traffic Signs	3	EA	
Streetlights	2	EA	
Sewer	N/A	N/A	EA
Water			
Fire Hydrants	4	EA	
Storm Drain	N/A	N/A	EA
Misc.			
Dry Utility Trench	2785	LF	
Remove Curb	605	LF	

Approved for Construction ESN.0108

Las Vegas Valley Water District
Project # H110064

Date ESN.018


Call before you Dig.
1-800-227-2600

Call before you OVERHEAD
1-702-593-6111

GREAT BASIN ENGINEERING - SOUTH
CONSULTING ENGINEERS and LAND SURVEYORS
2010 North Redwood Road, P.O. Box 16747
Salt Lake City, Utah 84116
Salt Lake City (801)521-8829 Ogden (801)394-7288 Fax (801)521-9551

General Notes

Montecito Marketplace - Phase 1
SE Corner Durango Drive & Elkhorn Road
Las Vegas, Nevada

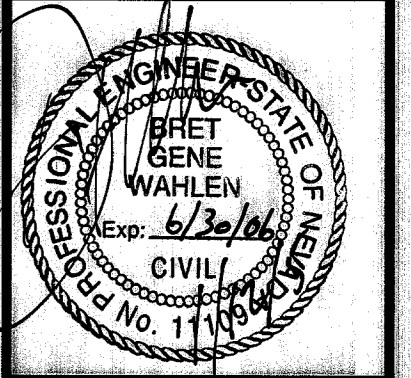

11 Jan, 2005
SHEET NO. 2
2 of 24
SMC332G
107V4300

Smith's
FOOD & DRUG STORES
#332
Las Vegas, Nevada