

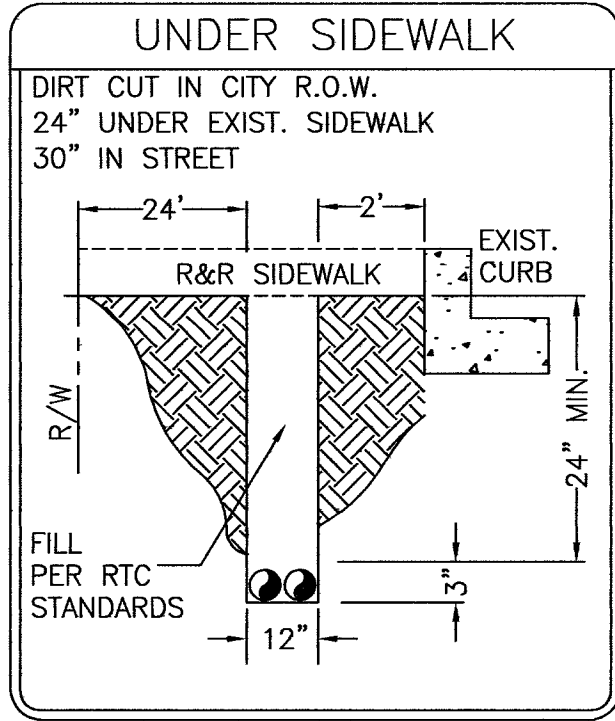


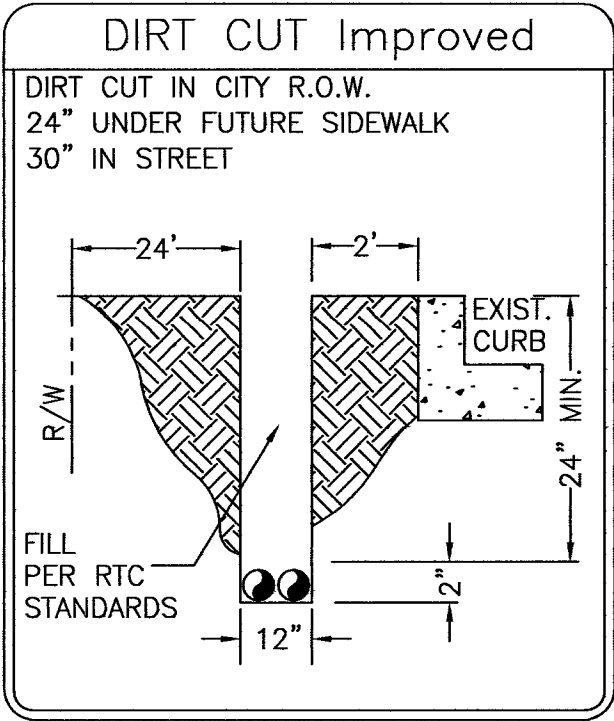


- CONSTRUCTION NOTES:**
- 1 LOCATE ALL UNDERGROUND UTILITIES BEFORE DIGGING. 1-800-227-2600
 - 2 INSTALL PULL BOXES AT EXISTING FINISH GRADE.
 - 3 MAINTAIN 18" MINIMUM COVER OVER DUCT IN DIRT BEHIND SIDEWALK. MAINTAIN 24" MINIMUM COVER OVER DUCT UNDER PROPOSED SIDEWALK. MAINTAIN 36" MINIMUM COVER OVER DUCT UNDER STREET.
 - 4 COMPACT BACKFILL IN THE STREET TO 95% AND COMPLY TO ALL CITY OF LAS VEGAS, COUNTY STANDARDS.
 - 5 PULL BOX - 15-3/4" x 25-1/4" x 12" OR 22-1/4" x 35-1/4" x 12"
 - 6 CONDUIT - PVC SCHEDULE 40
 - 7 REMOVE ONE SECTION OF SIDEWALK WHERE REQUIRED.
 - 8 PLACE TV PEDESTAL AT LOCATION SHOWN, TV-2400, CPH-1230, 1730 OR 2000 AS NOTED.
 - 9 REPLACE SIDEWALK AT EXISTING FINISH GRADE WHERE REQUIRED.
 - 10 BORE UNDER ALL CROSS GUTTERS.
 - 11 ALL LONGITUDINAL CUTS SHALL BE PER ESTABLISHED RTC GUIDELINES

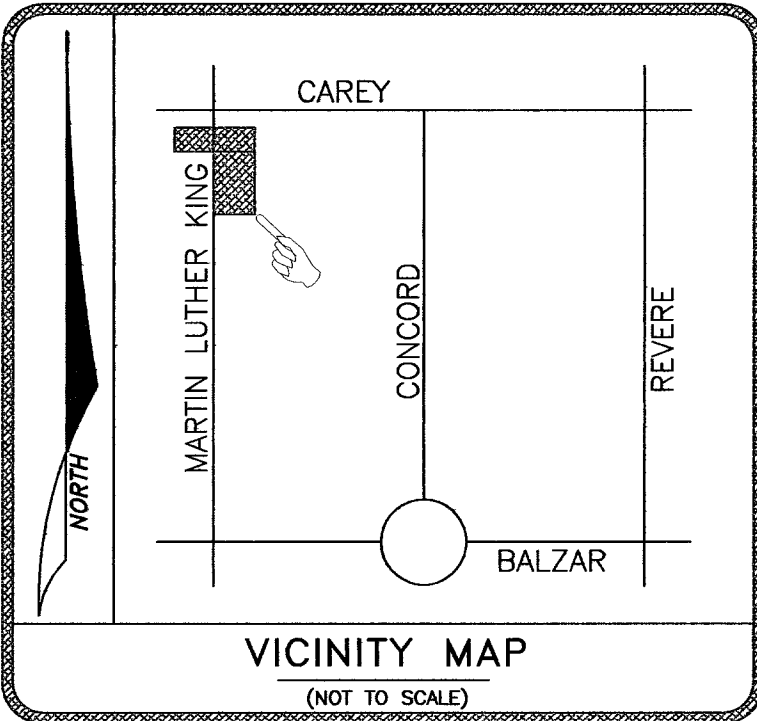

- LEGEND:**
- R&R SLAB OR POTHOLE
 - EXISTING PULL BOX
 - PROPOSED PULL BOX
 - △ EXISTING PEDESTAL
 - ▲ PROPOSED PEDESTAL
 - C-C- PROPOSED CONDUIT TRENCH
 - X-X- EXISTING CONDUIT
 - B-B- PROPOSED BORE
 - - - - RIGHT-OF-WAY OR PROPERTY LINE
 - BACK OF CURB OR CURB FACE
 - ⊙ INTERSECTING CENTERLINE
- *OTHER ITEMS WILL BE CALLED OUT

NOTE: CATV TRENCH ONLY AREA
PLEASE REFER TO NPC PROJECT
ID NUMBER 177571 (EARLY CHILDHOOD
DEVELOPMENT CENTER) FOR NON CATV AND
JOINT TRENCH INFORMATION

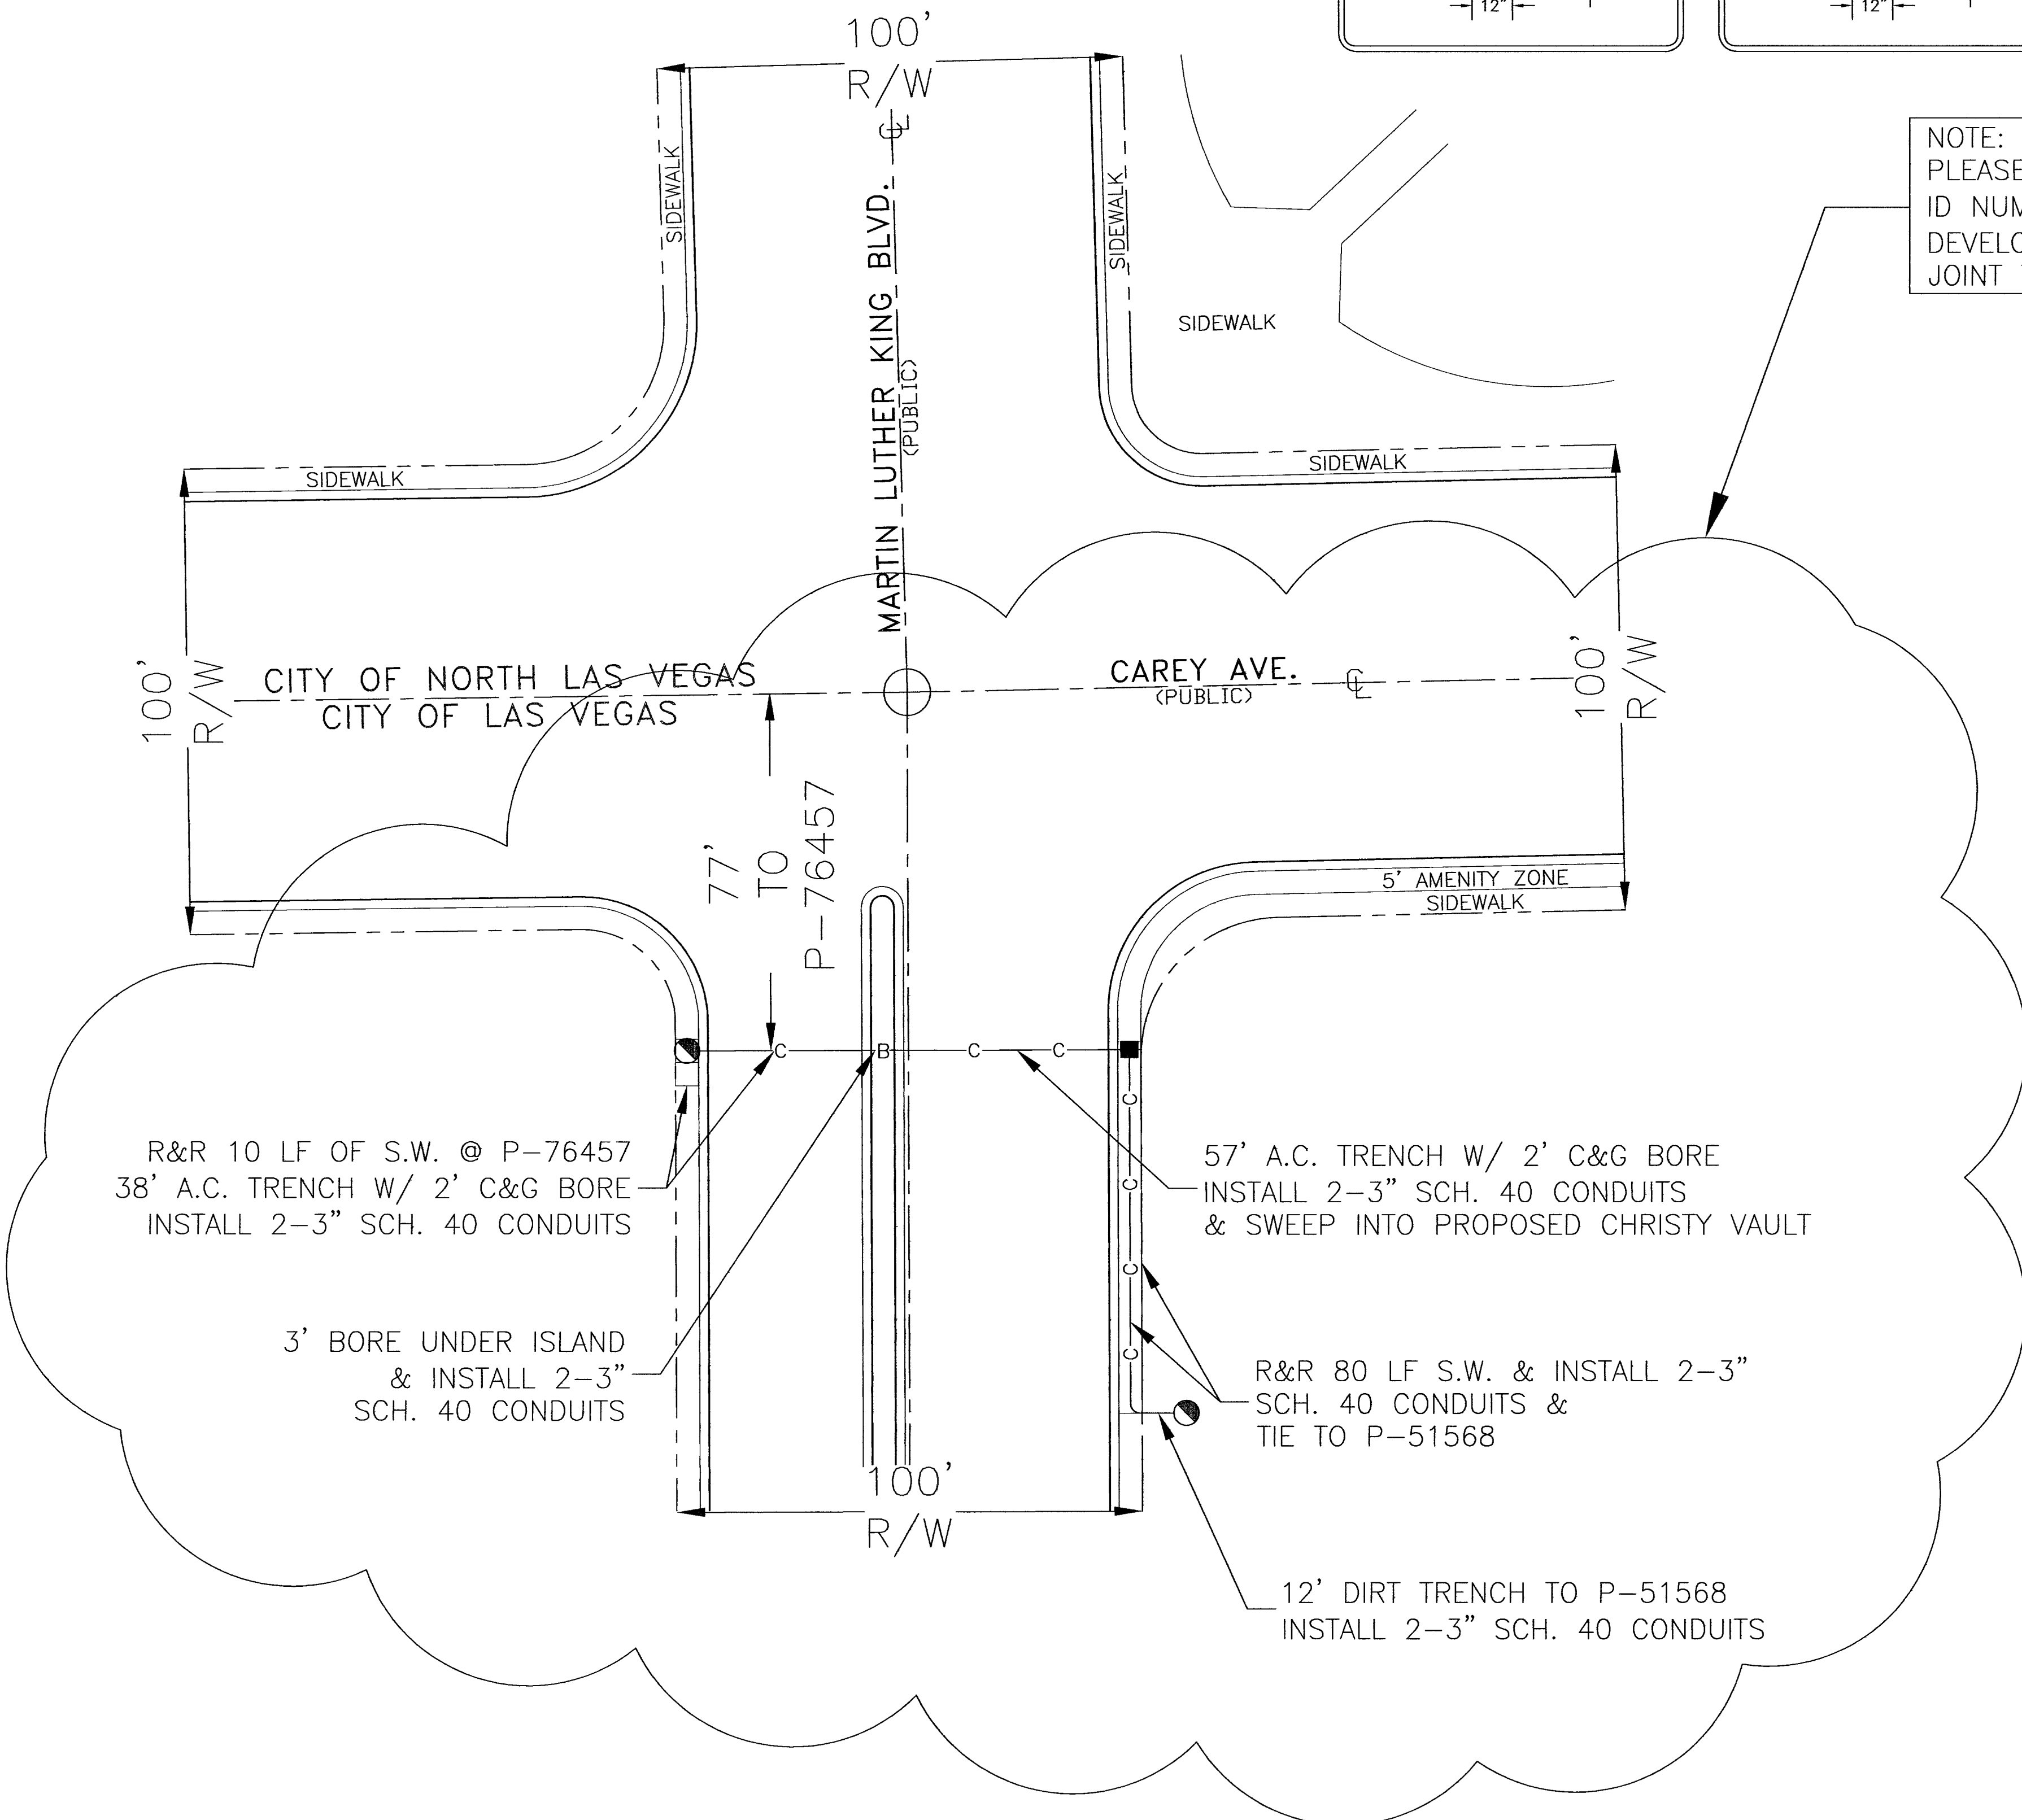

Las Vegas City Engineer by:

City of Las Vegas Engineer Designee
DATE: 7/3/06

NOTE: City of Las Vegas' approval of this plan is limited to the portion of the design plan located within the City of Las Vegas right of way and expressly excludes any work or design depicted within any other jurisdiction or private property. It is ~~your~~ ^{their} exclusive responsibility to obtain permits from any other jurisdiction as well as easements to utilize any and all private property.

NOTE

EXISTING UTILITY LOCATIONS SHOWN HEREIN ARE APPROXIMATE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXACT VERTICAL AND HORIZONTAL LOCATION OF ALL EXISTING UNDERGROUND UTILITIES PRIOR TO COMMENCING CONSTRUCTION. NO REPRESENTATION IS MADE THAT ALL EXISTING UTILITIES ARE SHOWN HEREON. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR UTILITIES NOT SHOWN OR UTILITIES NOT SHOWN IN THEIR PROPER LOCATION.

Avoid cutting underground utility lines. It's costly.
Call before you Dig.
1-800-227-2600
UNDERGROUND SERVICE ALERT (USA)

DRAFTING CONTACT: Jeremiah Bowles
PHONE: (702) 384-8084 EXT. 1159

TOTAL BORE	3'
TOTAL DIRT TRENCH	12'
TOTAL ASPHALT TRENCH	95'
TOTAL TRENCH	110'
SIDEWALK REMOVAL/REPAIR	
TOTAL S/W PANELS	18
TOTAL LINEAR FOOTAGE	90'

107V4517-2-Cox SHEET 1 OF 1

PROJECT LOCATION/DESCRIPTION: MARTIN LUTHER KING/CAREY		
AREA: CITY OF LAS VEGAS		
SCALE: 1"=20'	APPROVED BY: GENE SIEGEL/210-7024	MAP # 6248
DATE: 7/3/06 BY: YG	TECH: # 455	CONTRACTOR: COMTEC
F.B.# 36-31-6F	DATE: BY: REVISIONS	COX PERMIT # 3996