


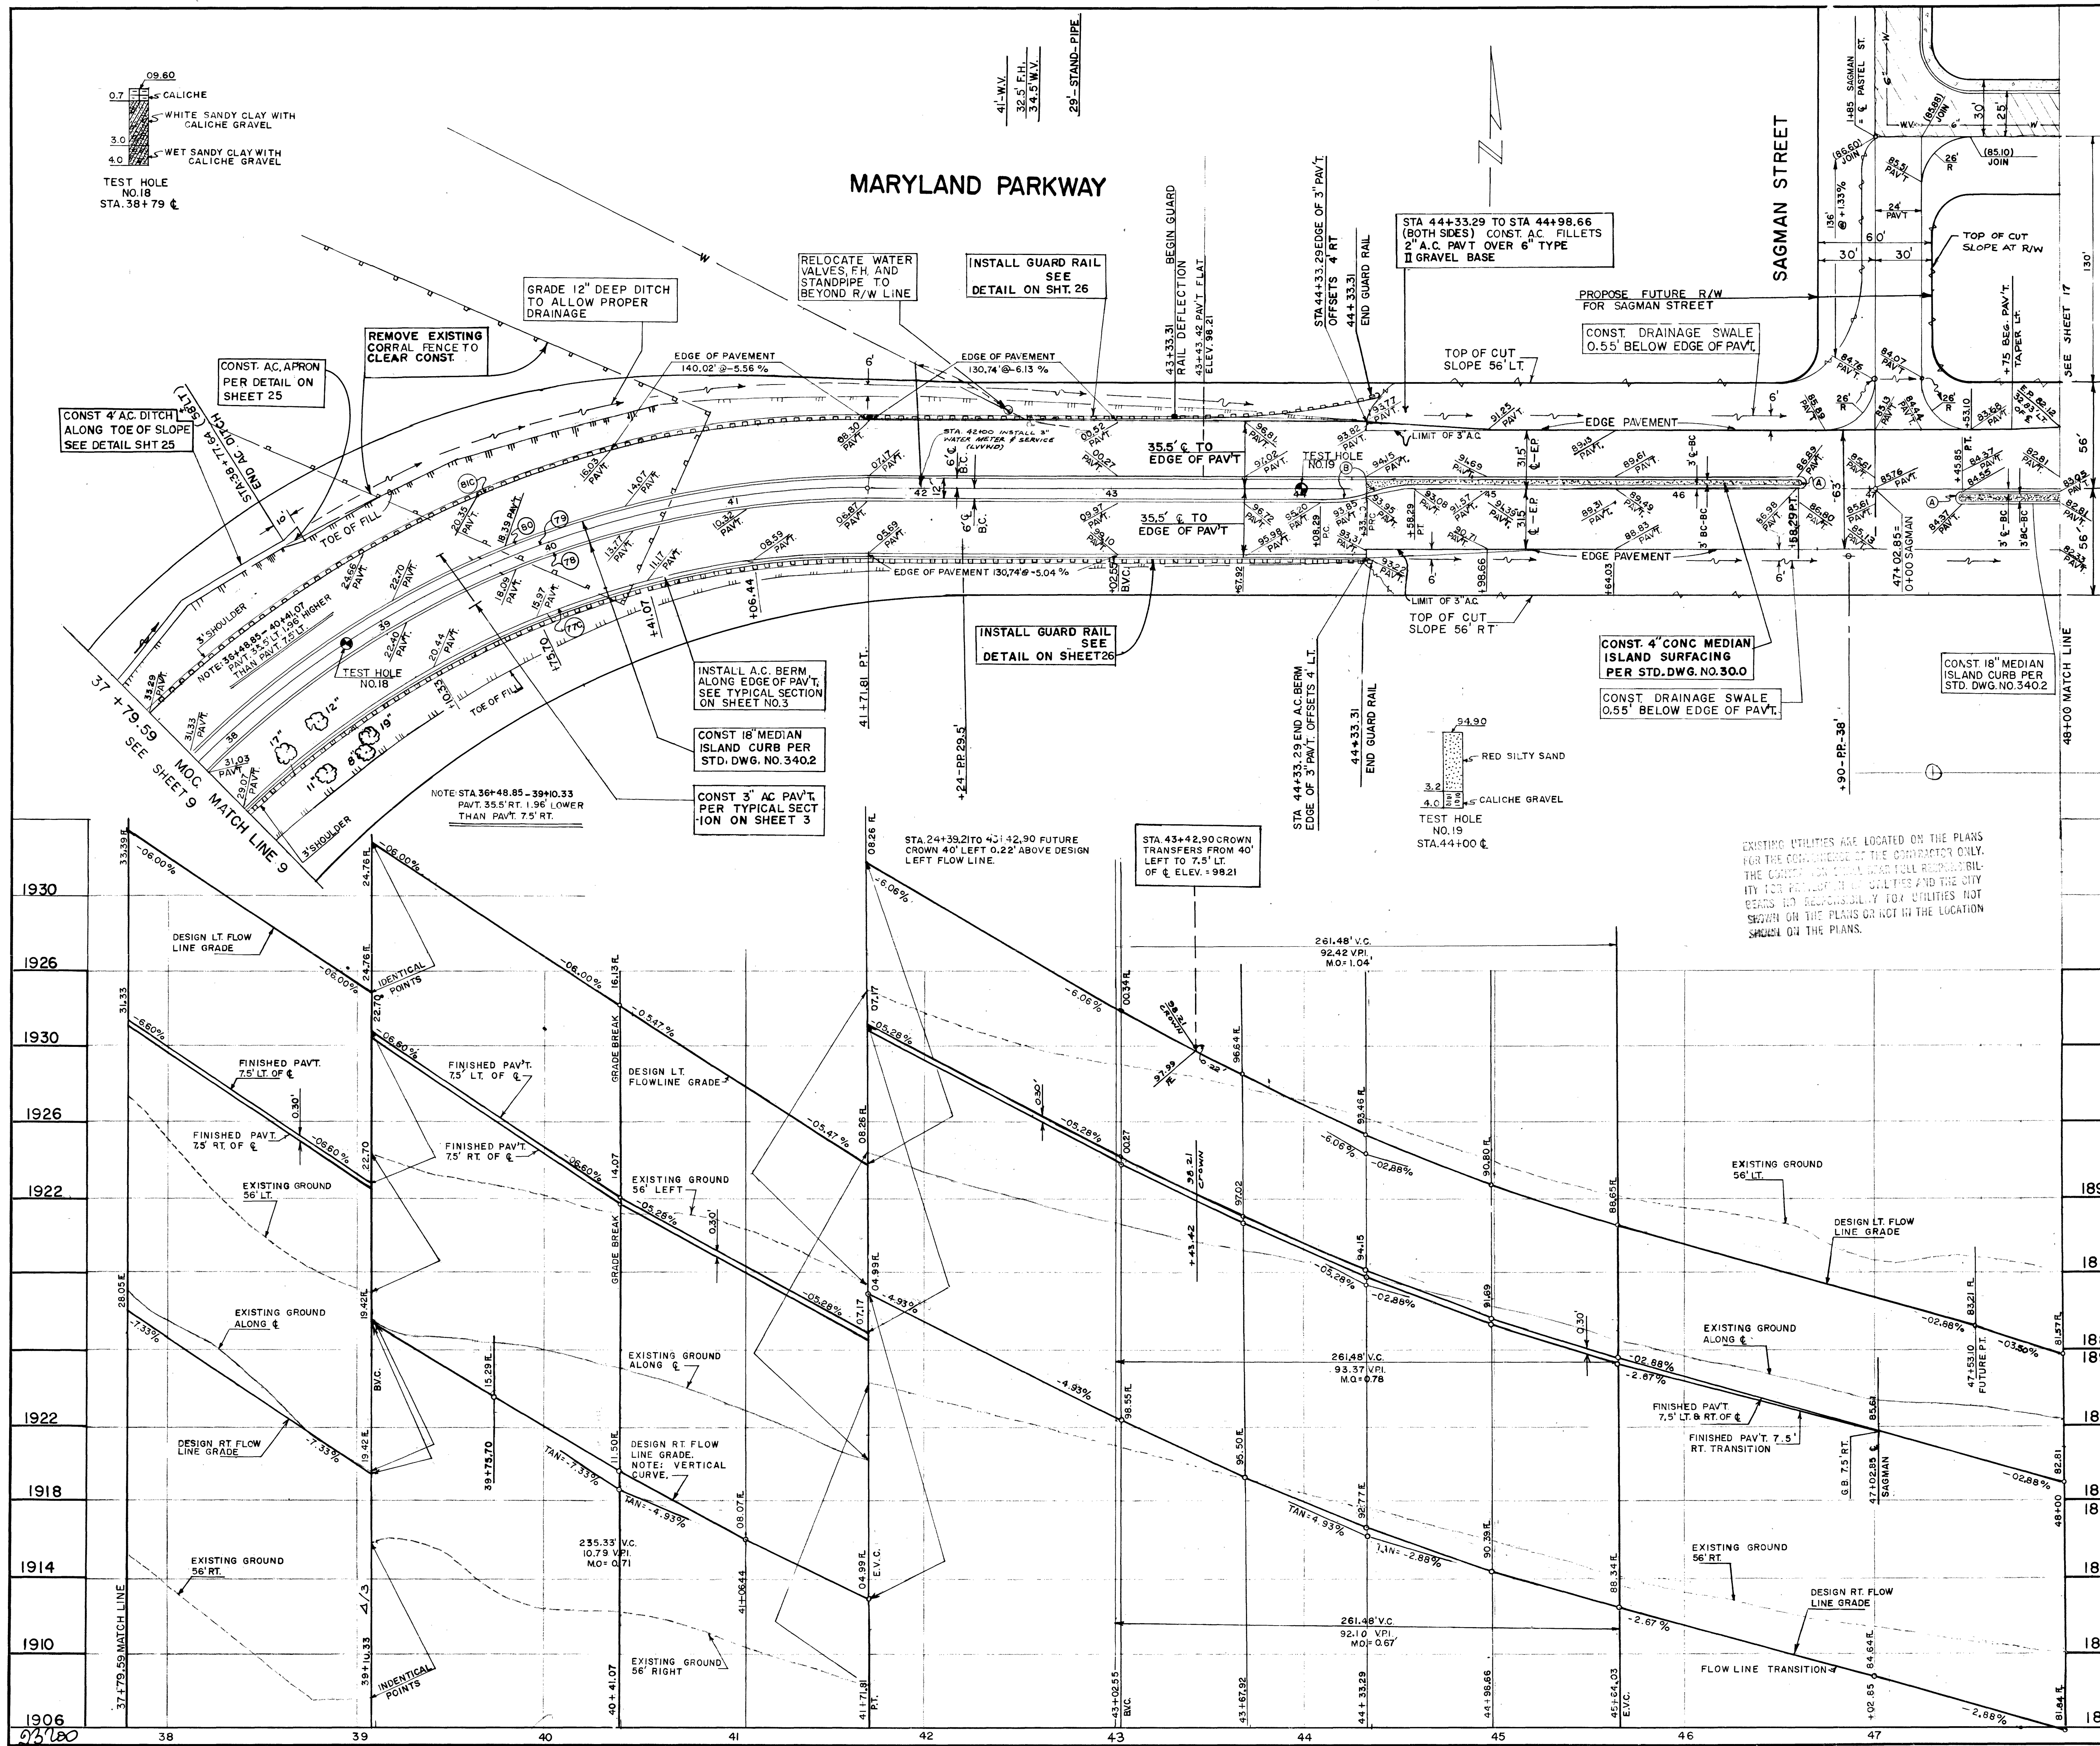

APPROXIMATE QUANTITIES - THIS SHEET			
ITEM	DESCRIPTION	UNIT	QUANTITY
201.1	ROADWAY EXCAVATION - UNCLASSIFIED	CY.	4,110
200.1.1	REMOVE CORRAL FENCE	L.F.	350
340.2	CONSTRUCT CONC. ISLAND CURB & GUTTER	L.F.	1,850
340.3.1	CONSTRUCT CONC. MEDIAN SURFACE	S.F.	885
302.1	TYPE I GRAVEL BASE	CY.	1,395
302.2	TYPE II GRAVEL BASE	CY.	888
334.4	2" ASPHALTIC CONC. PAVEMENT	TON	3
334.6	3" ASPHALTIC CONC. PAVEMENT	TON	1,122
333.1	1 1/2" OPEN GRADED PLANT MIX	S.Y.	6,408
334.2.1	CONSTRUCT A.C. BERM	L.F.	654
334.3.1	CONSTRUCT A.C. DITCH & APRON	L.F.	127
411.1	INSTALL GUARD RAIL	L.F.	1,307
200.4	REMOVE TREE 4" - 10" DIA.	EA.	1
200.10	REMOVE TREE OVER 10" DIA.	EA.	4
334.5	2 1/2" ASPHALT CONCRETE PAVT.	TON	67
334.503	ASPHALT CONC. ISLAND SURFACE (1 1/2")	TON	75
334.800	BITUMINOUS PRIME COAT	GAL.	1,000
560.081	RELOCATE R.H., W.V.S., & STANDPIPE (1)	L.S.	1
910.340	MEDIAN A.C. COLORING (1)	S.Y.	866

TYPICAL SECTION
SAGMAN STREET
MARYLAND PARKWAY TO PASTEL

(1) INCLUDED IN C.L.V. COSTS.

CURVE DATA					
NO.	DELTA	RADIUS	TANGENT	LENGTH	LOC.
77C	59°55'33"	464.50'	267.78'	485.82'	EDGE PAVT.
78	89°53'24"	494.00'	493.04'	775.02'	B.C.
79	89°53'24"	500.00'	499.04'	784.44'	B.C.
80	89°53'24"	506.00'	505.02'	793.85'	B.C.
81C	59°55'33"	535.50'	308.71'	560.08'	EDGE PAVT.
A	180°00'00"	1.50'	∞	4.71'	B.C.
B	20°24'29"	71.69'	12.90'	25.54'	B.C.
G	161°49'10"	2.00'	12.50'	5.65'	B.C.
H	18°10'50"	162.25'	25.96'	51.48'	B.C.

CONTRACT DRAWING
ON 4/19/11

REVISION NO.	DESCRIPTION	BY	DATE	APPROVAL
1890				
1886				
1882				
1890				
1886				
1882				
1894				
1890				
1886				
1882				

CITY OF LAS VEGAS NEVADA
DEPARTMENT OF PUBLIC WORKS
SERVICES DIVISION

MARYLAND PARKWAY
STEWART AVENUE TO BRUCE STREET

W.O. NO. 7620	F.B.K. NO. 64-7X	DATE	DRAWING NO.
SC. (H) 1" = 40'	SC. (V) 1" = 4'	18 FEB. 71	107V-789A
DES. LOUVIERE	DR. S. KENT	ABV. DEM	FILE NO.
APPROVED BY DIRECTOR OF PUBLIC WORKS			

SHEET 10 OF 31