

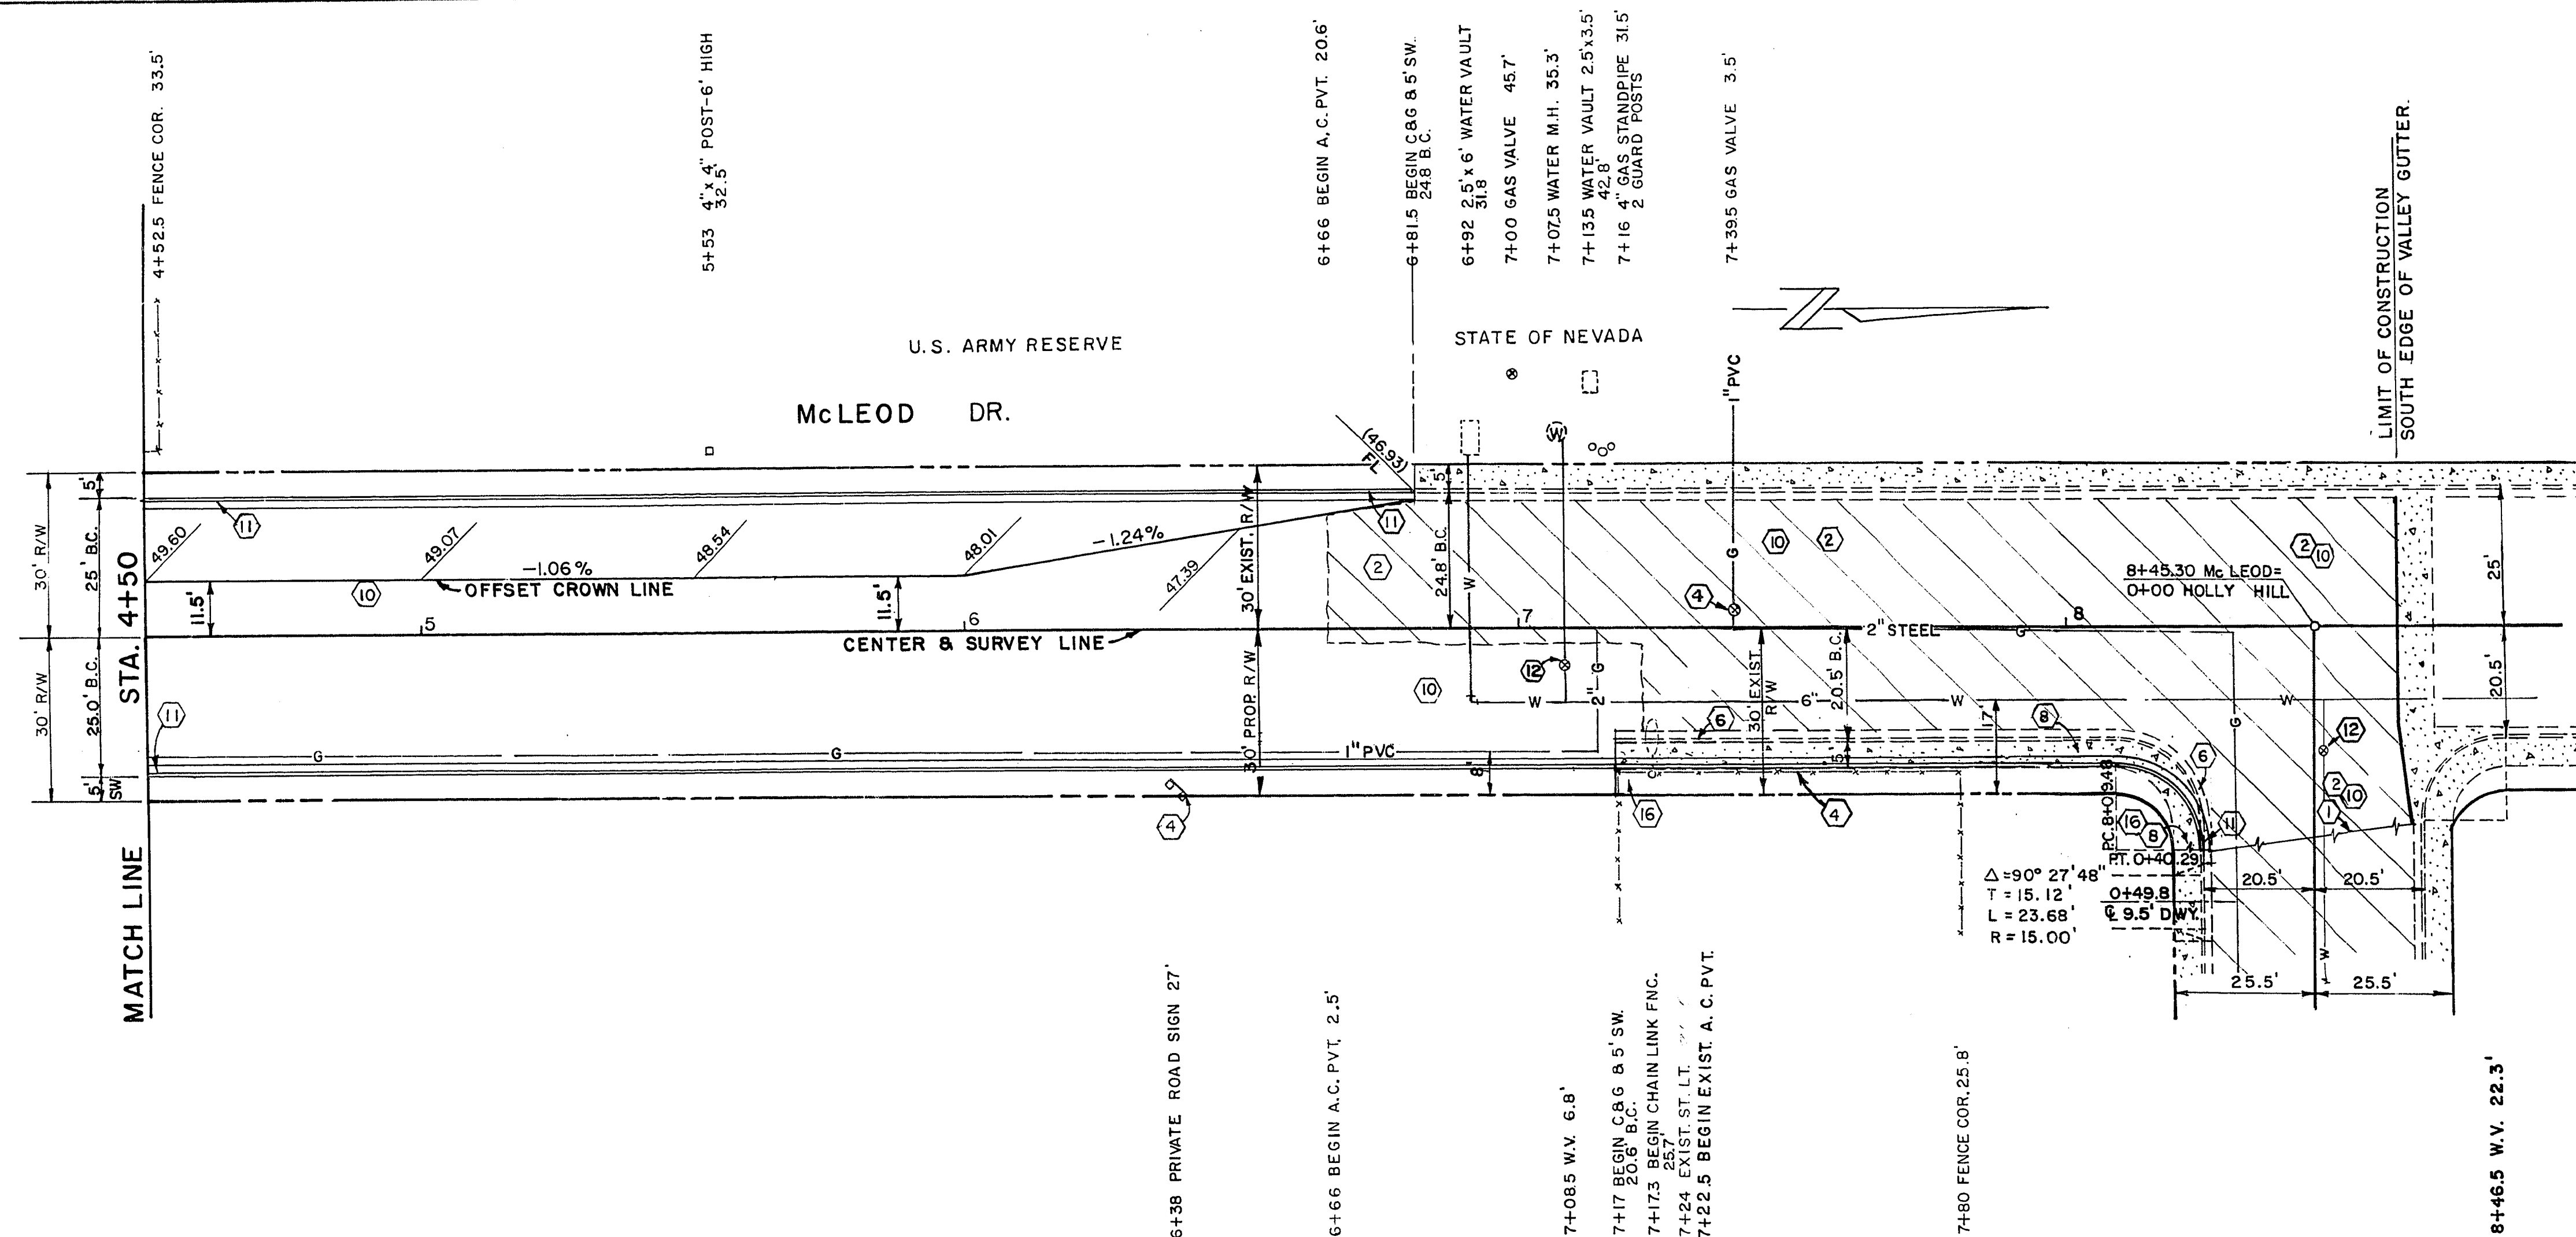


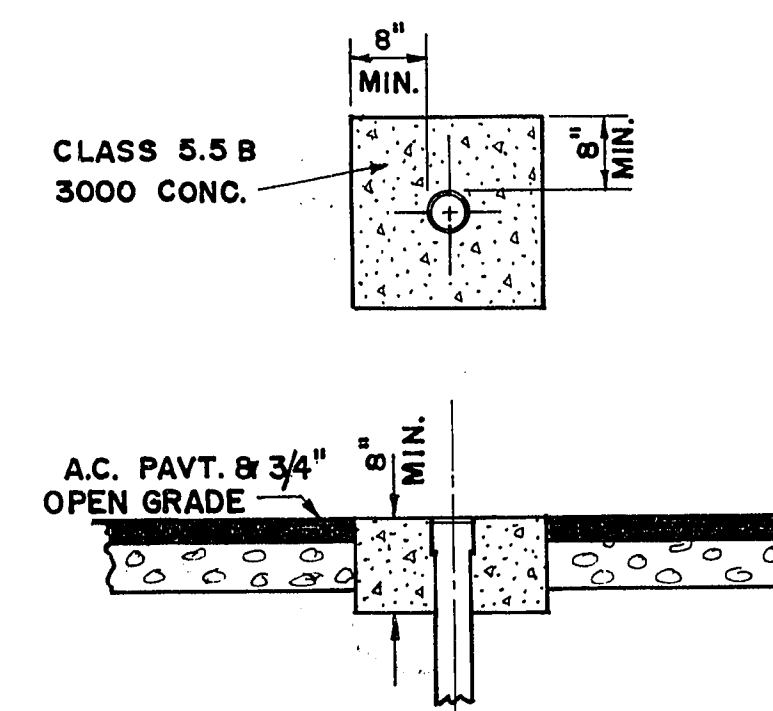

APPROXIMATE QUANTITIES — THIS SHEET					
CONSTR. NO.	ITEM NO.	DESCRIPTION	C.L.V.	R.S.H.	UNIT TOTAL
	201.100	EXCAVATION		246	C.Y. 246
①	201.100	SAWCUT A.C. PAVEMENT		37	L.F. 37
②	201.100	REMOVE A.C. PAVEMENT		858	S.Y. 858
③	200.110	REMOVE C & G.		120	LF 120
④	200.110	REMOVE SIDEWALK		600	SF 600
⑤	200.110	SAWCUT CONCRETE		7	LF 7
⑩	333.501	3/4" OPEN GRADE PLANT MIX		2178	SY. 2178
⑩	334.006	3" A.C. PAVEMENT		358	TON 358
⑩	334.800	PRIME COAT		653	GAL. 653
⑩	302.200	TYPE II GRAVEL BASE		251	C.Y. 251
⑩	302.100	TYPE I GRAVEL BASE		664	C.Y. 664
⑪	340.014	CONST. "L" TYPE C & G		616	L.F. 616
⑪	340.114	CONST. CONC. SIDEWALK		581	S.F. 581
⑫	560.060	ADJUST WATER VALVE		2	EA 2
	330.000	PAVING ASPHALT		23	TON 23

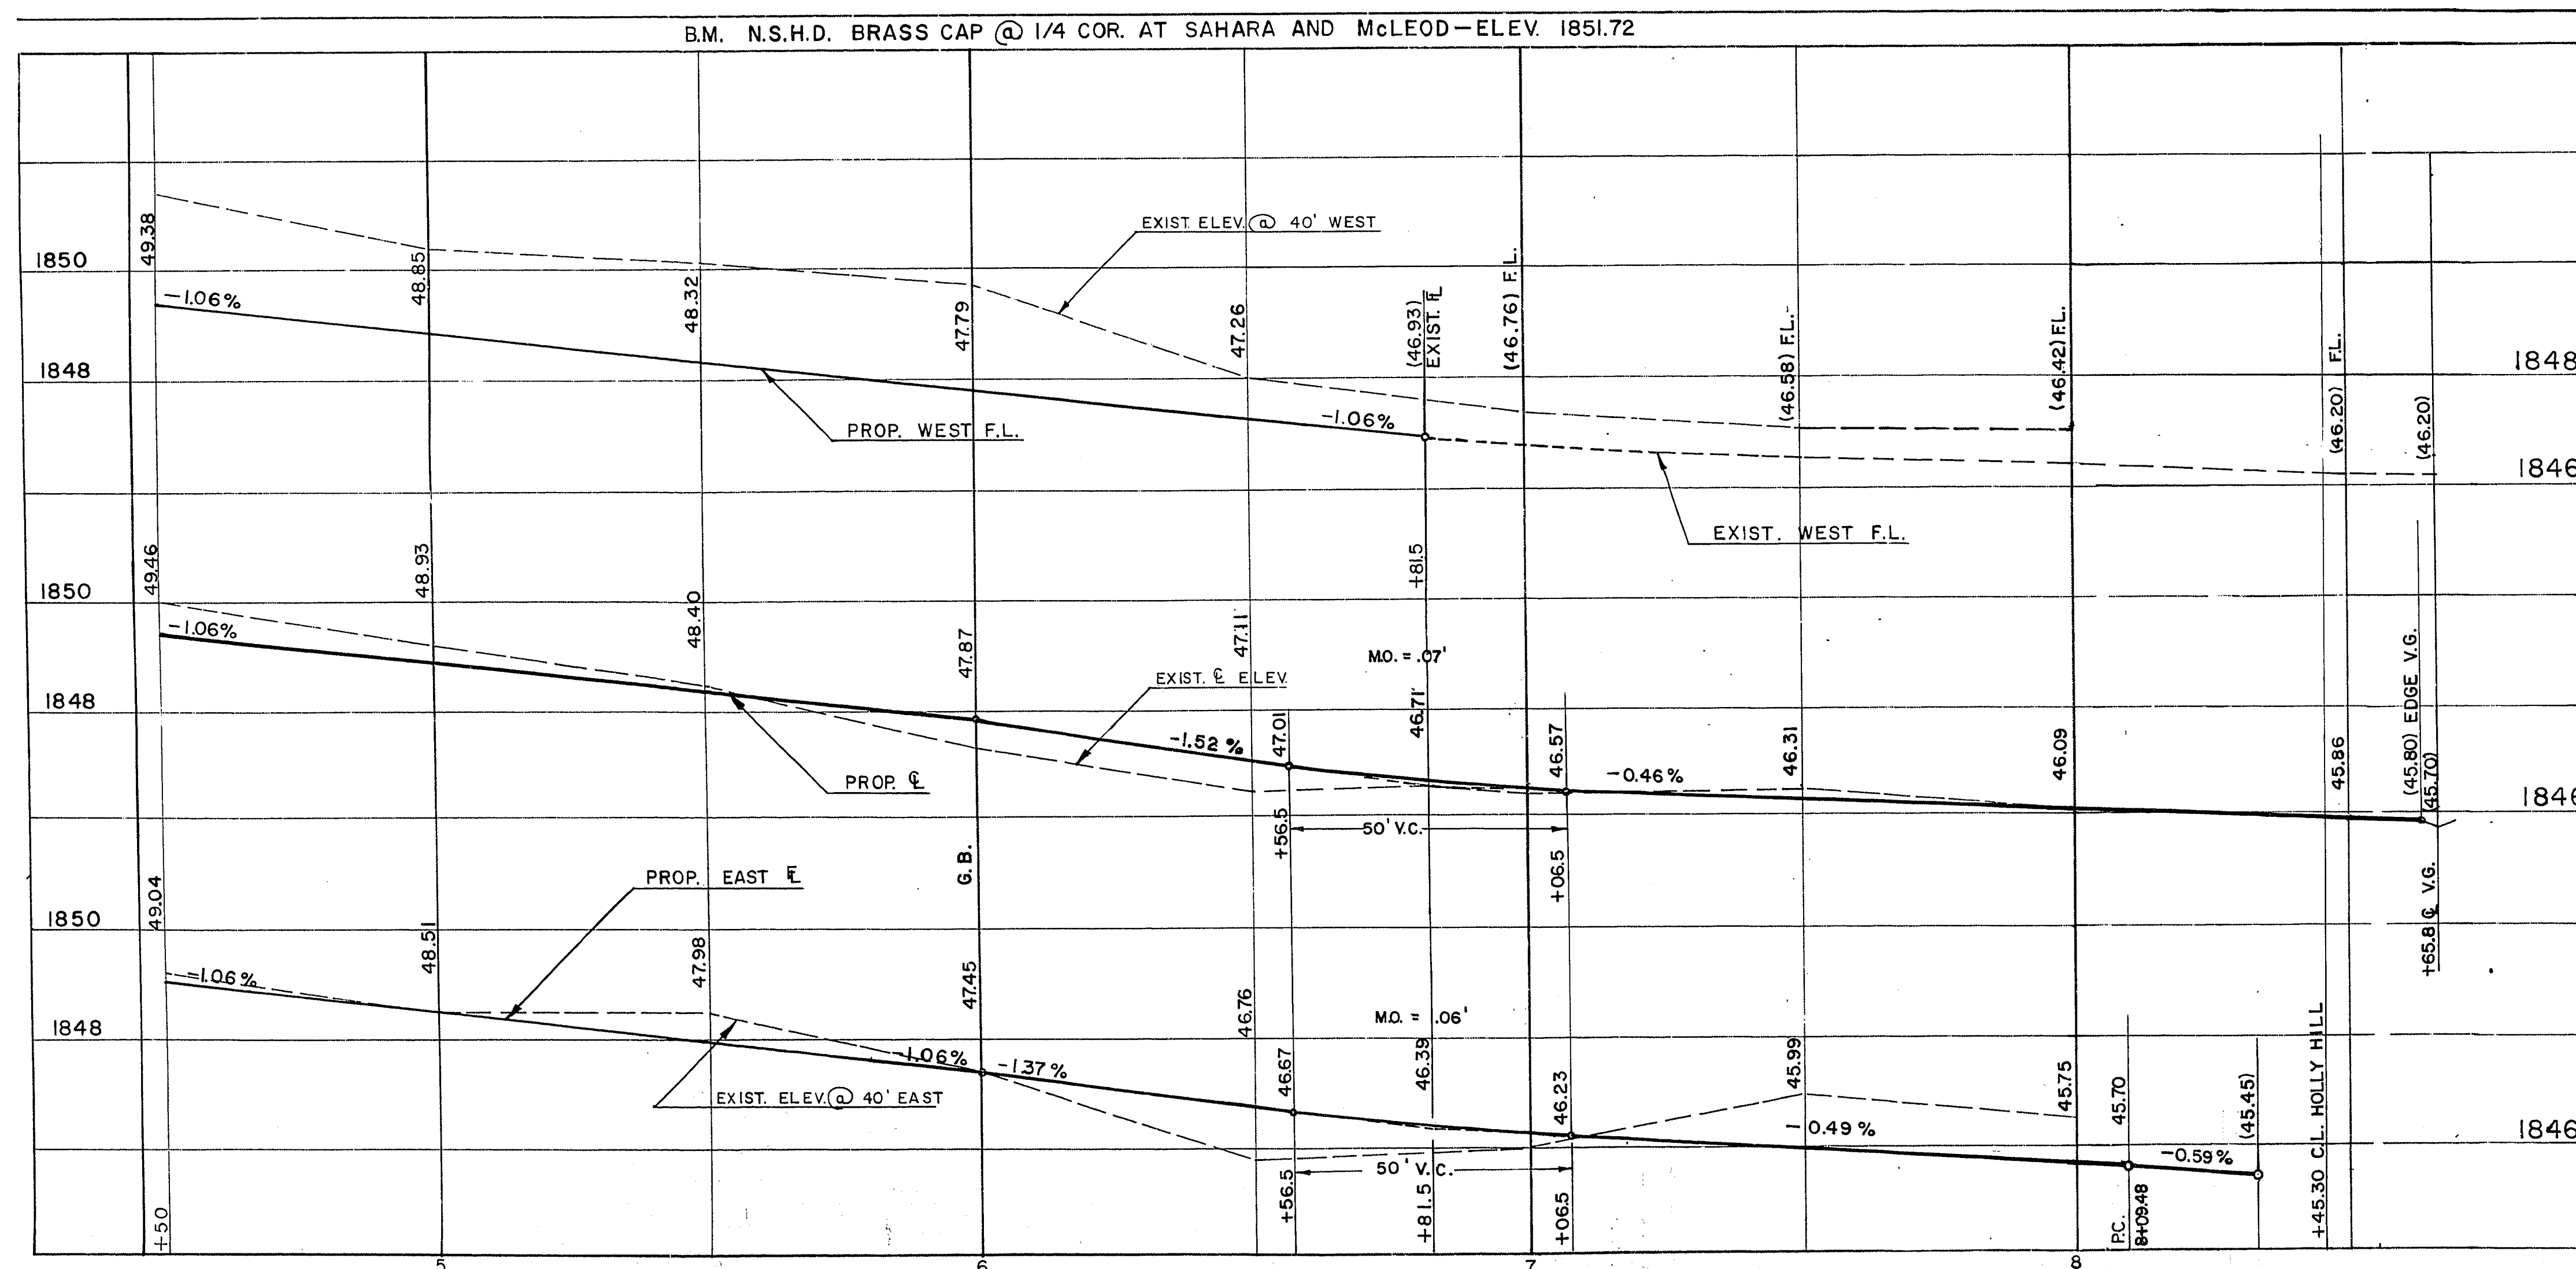

Valve Collar Detail

CITY OF LAS VEGAS NEVADA DEPARTMENT OF PUBLIC WORKS SERVICES DIVISION			
McLEOD DR.- SAHARA AVE. TO HOLLY HILL STA. 4+50 TO 8+45.30			
W.D. NO. 7689	F.B.K. NO. 72-7X	DATE	DRAWING NO.
SC. (H) 1" = 20'	SC. (V) 1" = 2'		
DES. W.L. JAUBERT		FILE NO.	
DR. M. PATTERSON		107 V-931	
APPROVED BY DIRECTOR OF PUBLIC WORKS		SHEET 4 OF 5	

William J. Jaubert
4/1/75

APR 16 1975
107 V-931

25-4-190