



- CONSTRUCTION NOTES**
1. Overlay existing pavement with a 2 inch layer of asphalt concrete. Prior to overlay prepare existing cracking for overlay per section 513 of technical specs place pavement reinforcing fabric over existing pavement with tack coat layer on both sides.
  2. Remove completely existing asphalt concrete, remove or place minimal amounts of Type 2 base material as necessary, and compact existing and any new base material. Install 4 inches of asphalt concrete.
  3. PAVEMENT.
  4. Elevations for red-head/bluotop/finish pavement are to be determined using existing curb and the cross section (illustrated on sheet 26 and 27). The cross fall in sections 1 & 2 is to be determined using the curb which provides the minimum of 2%.
  5. Pavement transition area.
  6. Reset survey monuments.
  7. Adjust manhole rim to match new finished grade. Install new concrete collars.
  8. Adjust water valve box to match new finished grade.
  9. Reinstall pavement to a depth of 2 inches. Apply a tack coat. Install 2 inches of overlay asphalt concrete.

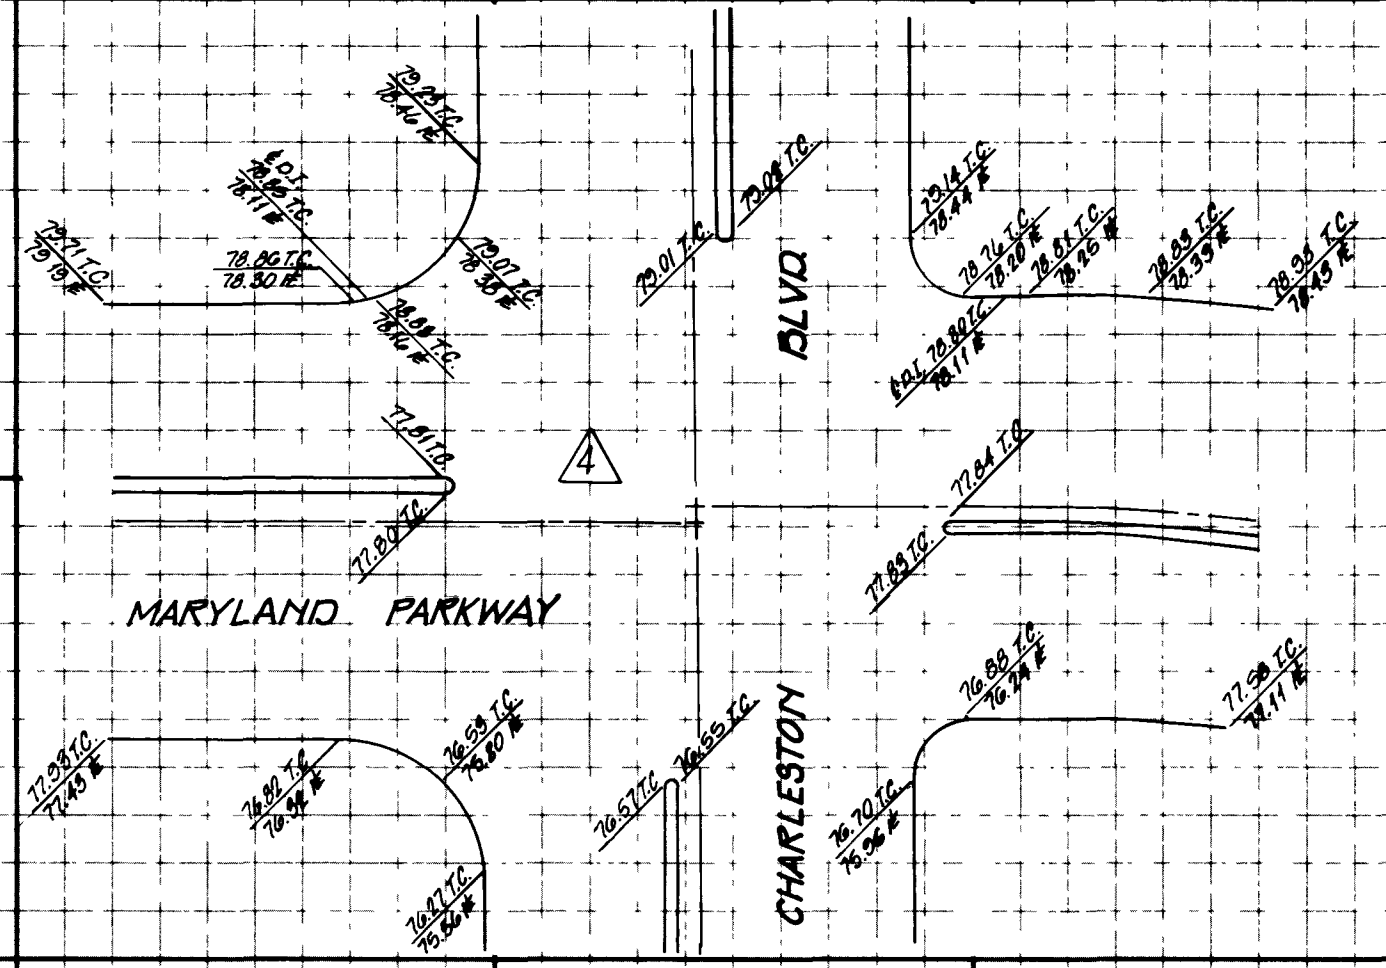

**Call before you Dig.**  
1-800-227-2600  
NEVER DRIVING SERVICE ALERT AREA  
-Only lines, it's costly.

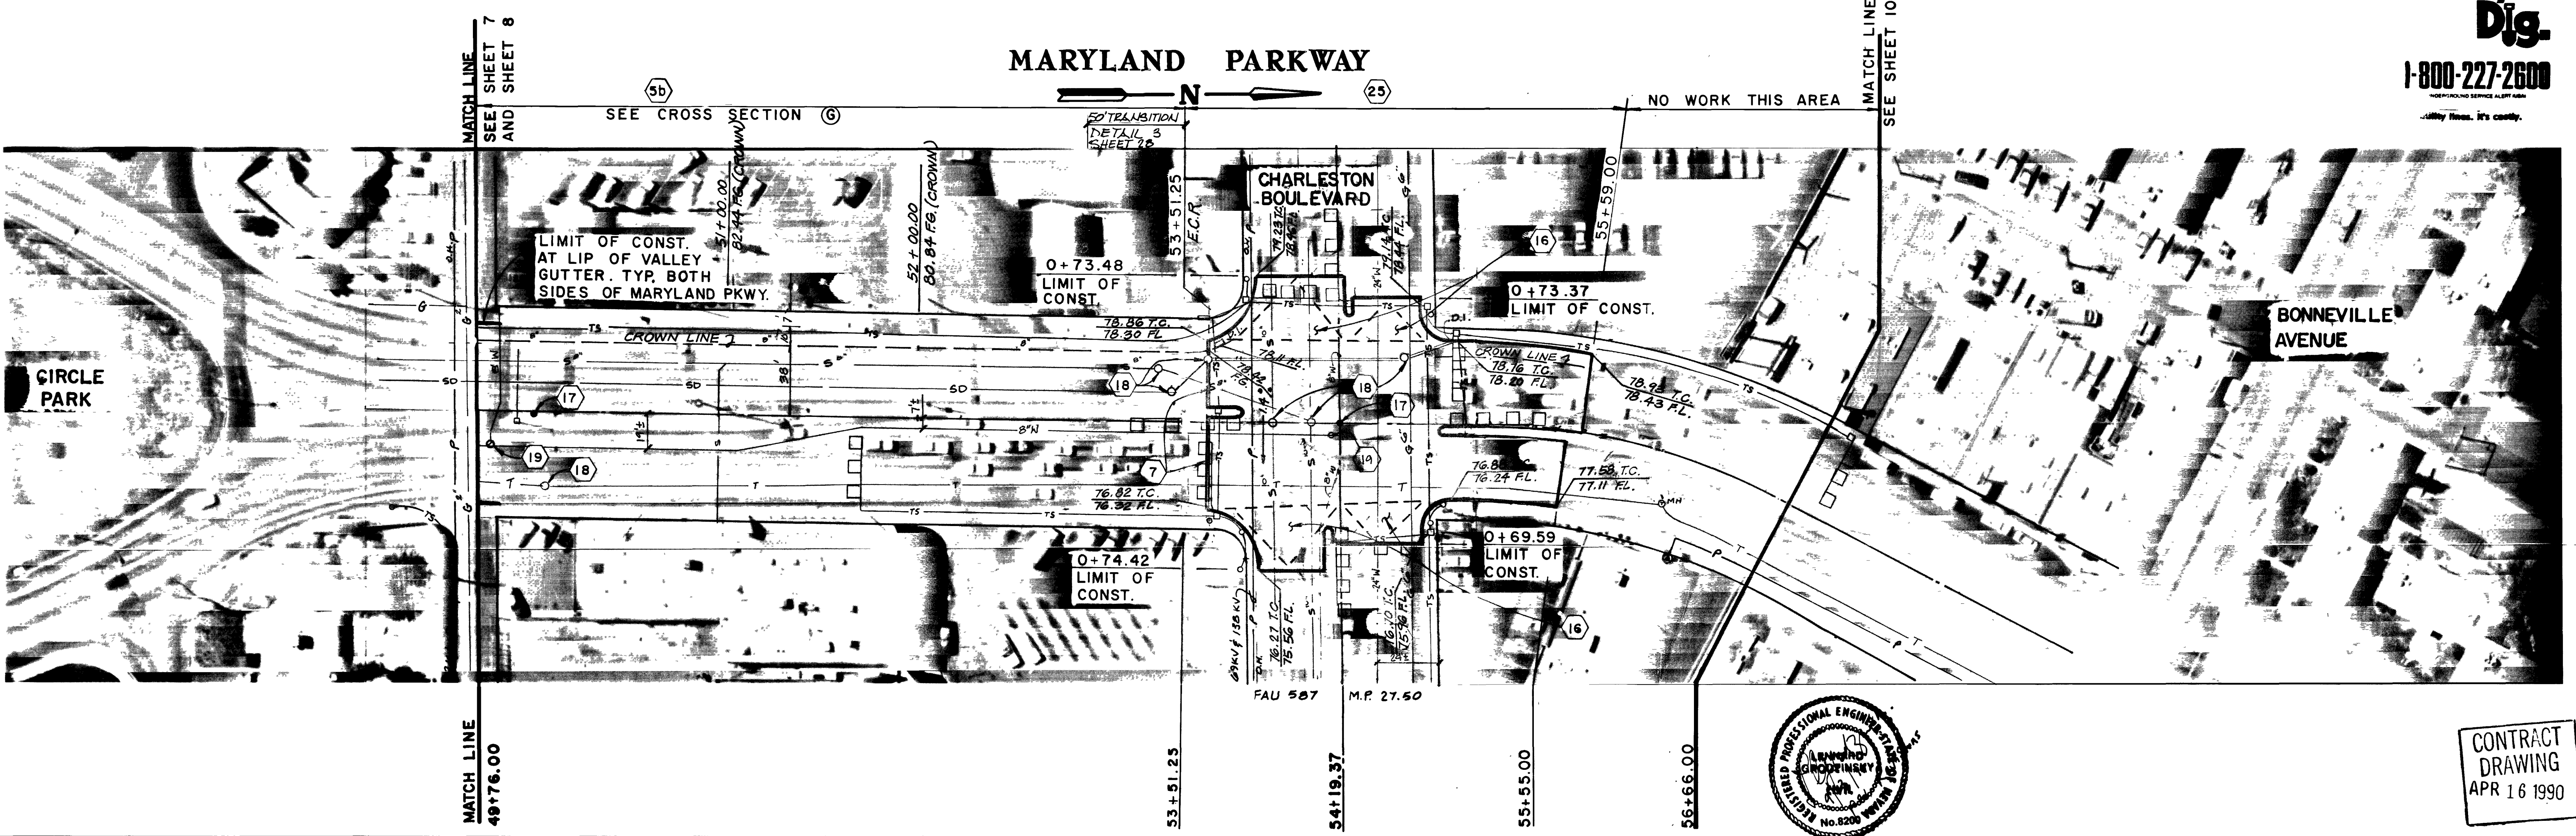


**City of Las Vegas**  
400 E. Stewart  
Las Vegas, Nevada  
89101



**ENGINEER**  
**THE KEITH COMPANIES NEVADA**  
4052 S. INDUSTRIAL RD., LAS VEGAS, NV. 89103 (702) 733-0350

No.	Date	By	Description
1	11/5/80	l.s.	ADD INTERSECTION DETAIL and DROP INLET ELEVATIONS
2	9/12/80	VE	ADD ST. LIGHT CONDUIT & OMB CLARIFICATIONS
3	9/12/80	VE	APPENDIX 4; ITEM 4
4	9/12/80	VE	APPENDIX 2; ITEM 7

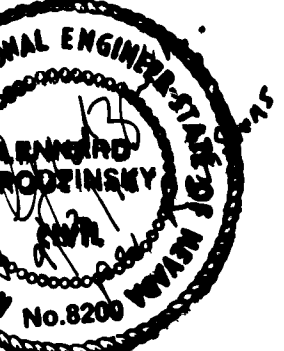

PLANNING  
CIVIL ENGINEERING  
LANDSCAPE ARCHITECTURE  
LAND SURVEYING  
CONSTRUCTION MANAGEMENT

TRC JOB NO. **E608-001** SHEET TITLE: **49+76.00 - 56+66.00**

DESIGNED BY: **F. C.** PROJECT TITLE: **MARYLAND PARKWAY FROM SAHARA AVE. TO STEWART AVE.**



DRAWN BY: **D. M.**

DATE: **JULY 89**

SCALE: **1" = 40'**

CONTRACT DRAWING APR 16 1990

SHEET NO.: **9** OF 33 SHEETS

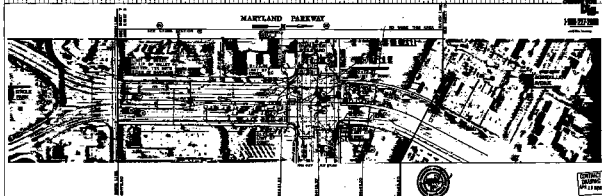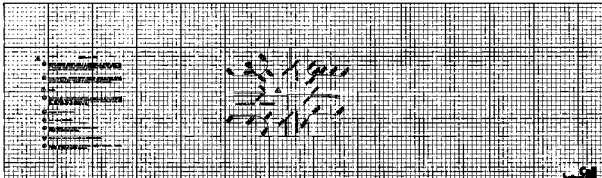

<p>City of Las Vegas          400 S. Stewart          Las Vegas, Nevada          89102</p>			<p>THE KEITH COMPANIES          NEVADA</p>	<table border="1"> <tr> <td>DATE</td> <td>10-18-00</td> </tr> <tr> <td>BY</td> <td>...</td> </tr> <tr> <td>DATE</td> <td>...</td> </tr> <tr> <td>BY</td> <td>...</td> </tr> </table>	DATE	10-18-00	BY	...	DATE	...	BY	...	<p>68-78.00 - 88-28.00  <b>MARYLAND PARKWAY</b>          FROM          SAHARA AVE. TO STEWART AVE.</p>	<p>CONTACT          DRAWING          NO. 23-100</p>	<p>9</p>
DATE	10-18-00														
BY	...														
DATE	...														
BY	...														