


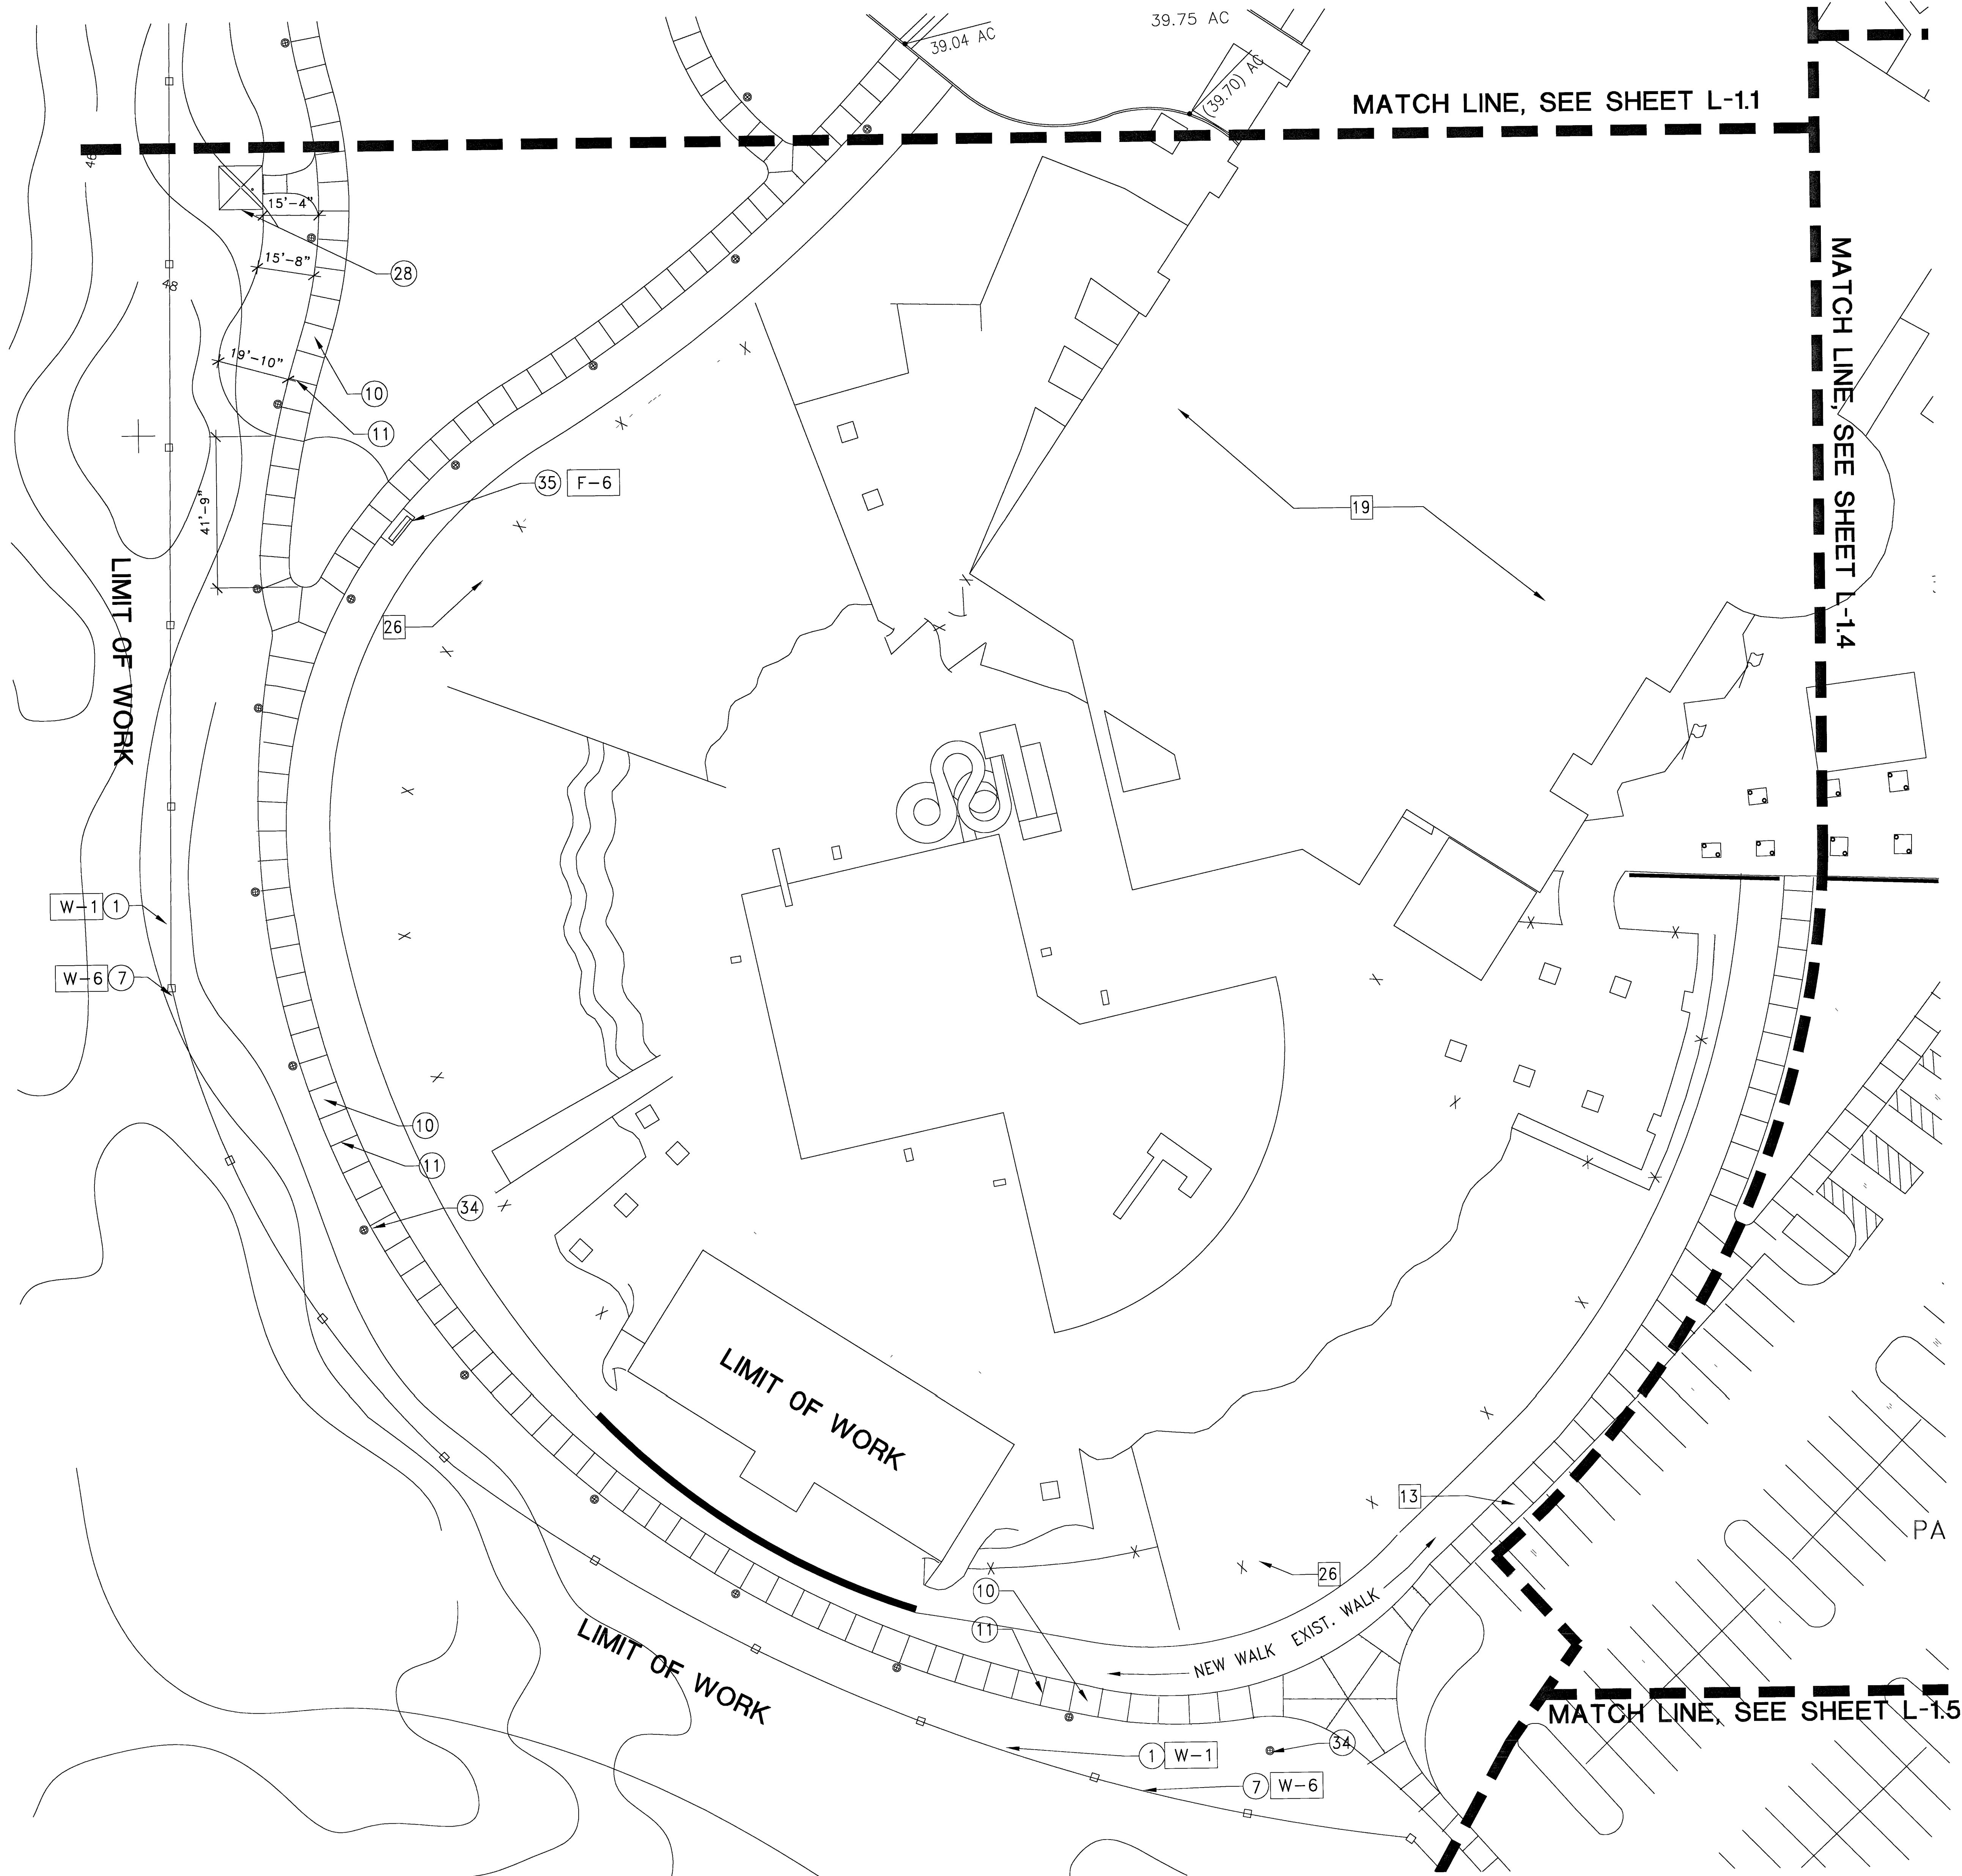

# CONSTRUCTION NOTE REFERENCE

| SYMBOL  | DESCRIPTION                                                         | DETAIL               | SHEET   |
|---------|---------------------------------------------------------------------|----------------------|---------|
| W-1 1   | 6'-6" HIGH SPLIT FACE MASONRY PILASTER WITH PRECISION CONCRETE CAP. | 1                    | L-2.1   |
| W-2 2   | 4'-6" SPLIT FACE MASONRY PILASTER WITH PRECISION CONCRETE CAP.      | 2                    | L-2.1   |
| W-3 3   | 6'-6" SPLIT FACE MASONRY WALL WITH PRECISION CONCRETE CAP.          | 3                    | L-2.1   |
| 4       | 4'-0" SPLIT FACE MASONRY WALL W/ PRECISION CONCRETE CAP.            | 4                    | L-2.1   |
| W-4 5   | LOW SPLIT FACE RETAINING MASONRY WALL W/ PRECAST CONCRETE CAP.      | 5                    | L-2.1   |
| W-1 6   | 1'-6" SPLIT FACE LOW MASONRY WALL W/ PRECAST CONCRETE CAP.          | 6                    | L-2.1   |
| W-6 7   | 6'-0" TUBULAR STEEL FENCE.                                          | 7                    | L-2.1   |
| 8       | 4'-0" TUBULAR STEEL ENCLOSURE FENCE.                                | 8                    | L-2.1   |
| W-6 9   | TUBULAR STEEL GATE.                                                 | 9                    | L-2.1   |
| 10      | 4" THICK CONCRETE FLATWORK.                                         | 1                    | L-2.2   |
| 11      | PAVING JOINTS.                                                      | 2                    | L-2.2   |
| 12      | CONCRETE MOW CURB.                                                  | 3                    | L-2.2   |
| 14      | CONCRETE STAIRS.                                                    | 5                    | L-2.2   |
| W-6 13  | HAND RAIL.                                                          | 6,7                  | L-2.2   |
| F-7 16  | TOT LOT LAYOUT.                                                     | 1                    | L-2.4   |
| F-8 17  | SHADE STRUCTURES IN TOT LOT AREA.                                   | 5&6                  | L-2.5   |
| 18      | TOT LOT CONCRETE CURB & DRAIN.                                      | 1                    | L-2.5   |
| 19      | RESILIENT PLAY SURFACE IN TOT LOT AREA.                             | 2                    | L-2.5   |
| 20      | BASKETBALL COURT LAYOUT.                                            | 3                    | L-2.5   |
| F-9 21  | BASKETBALL HOOP.                                                    | 4                    | L-2.5   |
| F-11 22 | HOCKEY RINK.                                                        |                      | L-2.6   |
| F-10 23 | HOCKEY RINK BOARD SETUP AND GATE.                                   | 1,2,3,4              | L-2.6.1 |
| 24      | HOCKEY RINK CHAINLINK CAGE FENCE.                                   | 5                    | L-2.6.2 |
| 25      | SKATEBOARD PARK.                                                    | 1                    | L-2.8   |
| 28      | SMALL PAVILLION SQUARE OVERHEAD STRUCTURE.                          | 2                    | L-2.3   |
| 29      | PICNIC TABLE.                                                       | 7                    | L-2.5   |
| 30      | PAVILLION OVERHEAD STRUCTURE.                                       | 1                    | L-2.3   |
| F-12 31 | DRINKING FOUNTAIN.                                                  | 9                    | L-2.5   |
| F-1 32  | TRASH RECEPTACLE.                                                   | 8                    | L-2.5   |
| F-5 33  | BBQ.                                                                | 10                   | L-2.5   |
| 34      | SITE LIGHTING.                                                      | PER ELECTRICAL PLANS |         |
| F-6 35  | BENCHES.                                                            | PER SCHEDULE         | L-1.0   |
| F-3 36  | BIKE RACK.                                                          | PER SCHEDULE         | L-1.0   |
| W-7 37  | 5'-6" ANGLE IRON BARRIER FENCE.                                     | 8,9                  | L-2.2   |
| F-4 38  | POOPER BAG DISPENSER.                                               | 11                   | L-2.5   |
| W-1 50  | 6'-0" HIGH SPLIT FACE MASONRY PILASTER WITH PRECISION CONCRETE CAP. | 1                    | L-2.1   |

## CONSULTANT REFERENCE LEGEND

| SYMBOL | DESCRIPTION                           | REMARK                     |
|--------|---------------------------------------|----------------------------|
| 1      | RIGHT OF WAY                          | PER CIVIL ENGINEER PLANS   |
| 2      | STREET LIGHTS                         | PER CIVIL ENGINEER PLANS   |
| 3      | FIRE HYDRANT                          | PER CIVIL ENGINEER PLANS   |
| 4      | CURB AND GUTTER                       | PER CIVIL ENGINEER PLANS   |
| 5      | DROP INLET                            | PER CIVIL ENGINEER PLANS   |
| 6      | PARKING LOT LAYOUT & STRIPING.        | PER CIVIL ENGINEER PLANS   |
| 7      | RETAINING WALL                        | PER CIVIL ENGINEER PLANS   |
| 8      | CONCRETE DRIVEWAY                     | PER CIVIL ENGINEER PLANS   |
| 9      | HANDICAP RAMP                         | PER CIVIL ENGINEER PLANS   |
| 10     | AC PAVING                             | PER CIVIL ENGINEER PLANS   |
| 13     | EXISTING SIDE WALK                    |                            |
| 14     | PROPERTY LINE                         | PER CIVIL ENGINEER PLANS   |
| 15     | AREA DRAINS, TYPICAL                  | PER CIVIL ENGINEER PLANS   |
| 17     | DOMESTIC WATER METER                  | PER CIVIL ENGINEER PLANS   |
| 18     | UNDERGROUND UTILITIES                 | PER CIVIL ENGINEER PLANS   |
| 19     | EXISTING ARCHITECTURE                 |                            |
| 20     | EXISTING MASONRY WALL                 |                            |
| 21     | RESTROOM BUILDING                     | BY OTHERS (ADD ALT.)       |
| 22     | MAINTENANCE BUILDING                  | PER CIVIL ENGINEER PLANS   |
| 23     | EXISTING PUMP STATION                 | PER CIVIL ENGINEER PLANS   |
| 24     | CITY OF LAS VEGAS ENTRY MONUMENT SIGN | BY OTHERS                  |
| 25     | PARK SITE LIGHTING                    | PER ELECTRICAL ENG. PLANTS |
| 26     | EXISTING CHAINLINK FENCE              |                            |

## GENERAL CONSTRUCTION NOTES

- ENSURE THAT FINE GRADES HAVE BEEN SET CORRECTLY PRIOR TO INSTALLING WALKS, FOOTINGS, WALLS, AND OTHER STRUCTURES.
- CONFORM WORK TO REQUIREMENTS OF LATEST ADOPTED EDITION OF UNIFORM BUILDING CODE AND OTHER APPLICABLE LOCAL AND STATE CODES, ORDINANCES AND REGULATIONS.
- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALING OF DRAWINGS. DIMENSIONS INDICATED ON DRAWINGS ARE TAKEN FROM OUTSIDE FACE OF WALLS, PAVING, CURBS, ETC. UNLESS INDICATED OTHERWISE ON DRAWINGS.
- WHERE CONFLICTS OCCUR BETWEEN GENERAL CONSTRUCTION NOTES, DRAWINGS AND ACTUAL FIELD CONDITIONS, NOTIFY OWNER'S AUTHORIZED REPRESENTATIVE FOR CLARIFICATION. FAILURE TO PROVIDE SUCH NOTIFICATION MAY MAKE CONTRACTOR LIABLE FOR COSTS INCURRED TO RECTIFY THE DISCREPANCY.
- BE RESPONSIBLE TO CONSULT WITH SITE SUPERINTENDENT, APPROPRIATE AGENCIES, AND DRAWINGS FOR VERIFYING LOCATIONS FOR UNDERGROUND UTILITIES, PIPES AND RELATED STRUCTURES. TAKE SOLE RESPONSIBILITY FOR COSTS INCURRED DUE TO SAID UTILITIES IF PROPER VERIFICATION BY CONTRACTOR WAS NOT PERFORMED.
- DO NOT WILLFULLY PROCEED WITH CONSTRUCTION OPERATIONS WHEN IT IS OBVIOUS THAT UNKNOWN OBSTRUCTIONS AND GRADE DIFFERENCES EXIST THAT MAY NOT HAVE BEEN KNOWN DURING THE DESIGN PROCESS. BRING SUCH CONDITIONS IMMEDIATELY TO ATTENTION OF OWNER'S AUTHORIZED REPRESENTATIVE FOR RESOLUTION. ASSUME FULL RESPONSIBILITY FOR COSTS INCURRED AND REQUIRED MODIFICATIONS DUE TO LACK OF PROVIDING SUCH NOTIFICATION.
- ENSURE THAT DRAINLINES, IRRIGATION LATERAL AND MAINLINES, ELECTRICAL CONDUIT, SLEEVES, ETC., ARE IN PLACE PRIOR TO INSTALLATION OF PAVING AND WALLS.
- REPLACE OR REPAIR EXISTING MATERIALS THAT ARE DAMAGED BY CONTRACTOR DURING CONSTRUCTION.
- PAVING AND SEALANT MOCK-UPS ARE REQUIRED-REFER TO CONSTRUCTION NOTES.
- ENSURE THAT CURVED EDGES HAVE SMOOTH AND CONTINUOUS CURVES.
- VERIFY PROPERTY AND LIMIT OF WORK LINES PRIOR TO COMMENCING WORK. SPECIFICATIONS WHERE APPLICABLE.
- PROVIDE ISOLATION JOINTS AT LOCATIONS WHERE PAVING ABUTS BUILDING WALLS, COLUMNS, STEPS, LANDSCAPE WALLS AND OTHER FIXED VERTICAL SURFACES.
- PROVIDE DOWELED CONSTRUCTION JOINTS WHERE DIFFERENT PAVING TYPES ABUT AND WHEN PAVING WORK STOPPAGES OCCUR.



DEPARTMENT OF PUBLIC WORKS  
LAS VEGAS PARK  
LAS VEGAS, NEVADA  
CONSTRUCTION PLAN

OWNER: CITY OF LAS VEGAS  
DEPARTMENT OF PUBLIC WORKS  
ARCHITECTURAL SERVICES

400 EAST STEWART AVENUE  
LAS VEGAS, NEVADA 89101  
PHONE (702) 228-6535  
FAX (702) 386-3333  
TDD: (702) 386-9108

DATE 06-09-06  
SCALE 04-15-01  
REV NO  
ELEVATION 107-12759  
05

L-1.3