



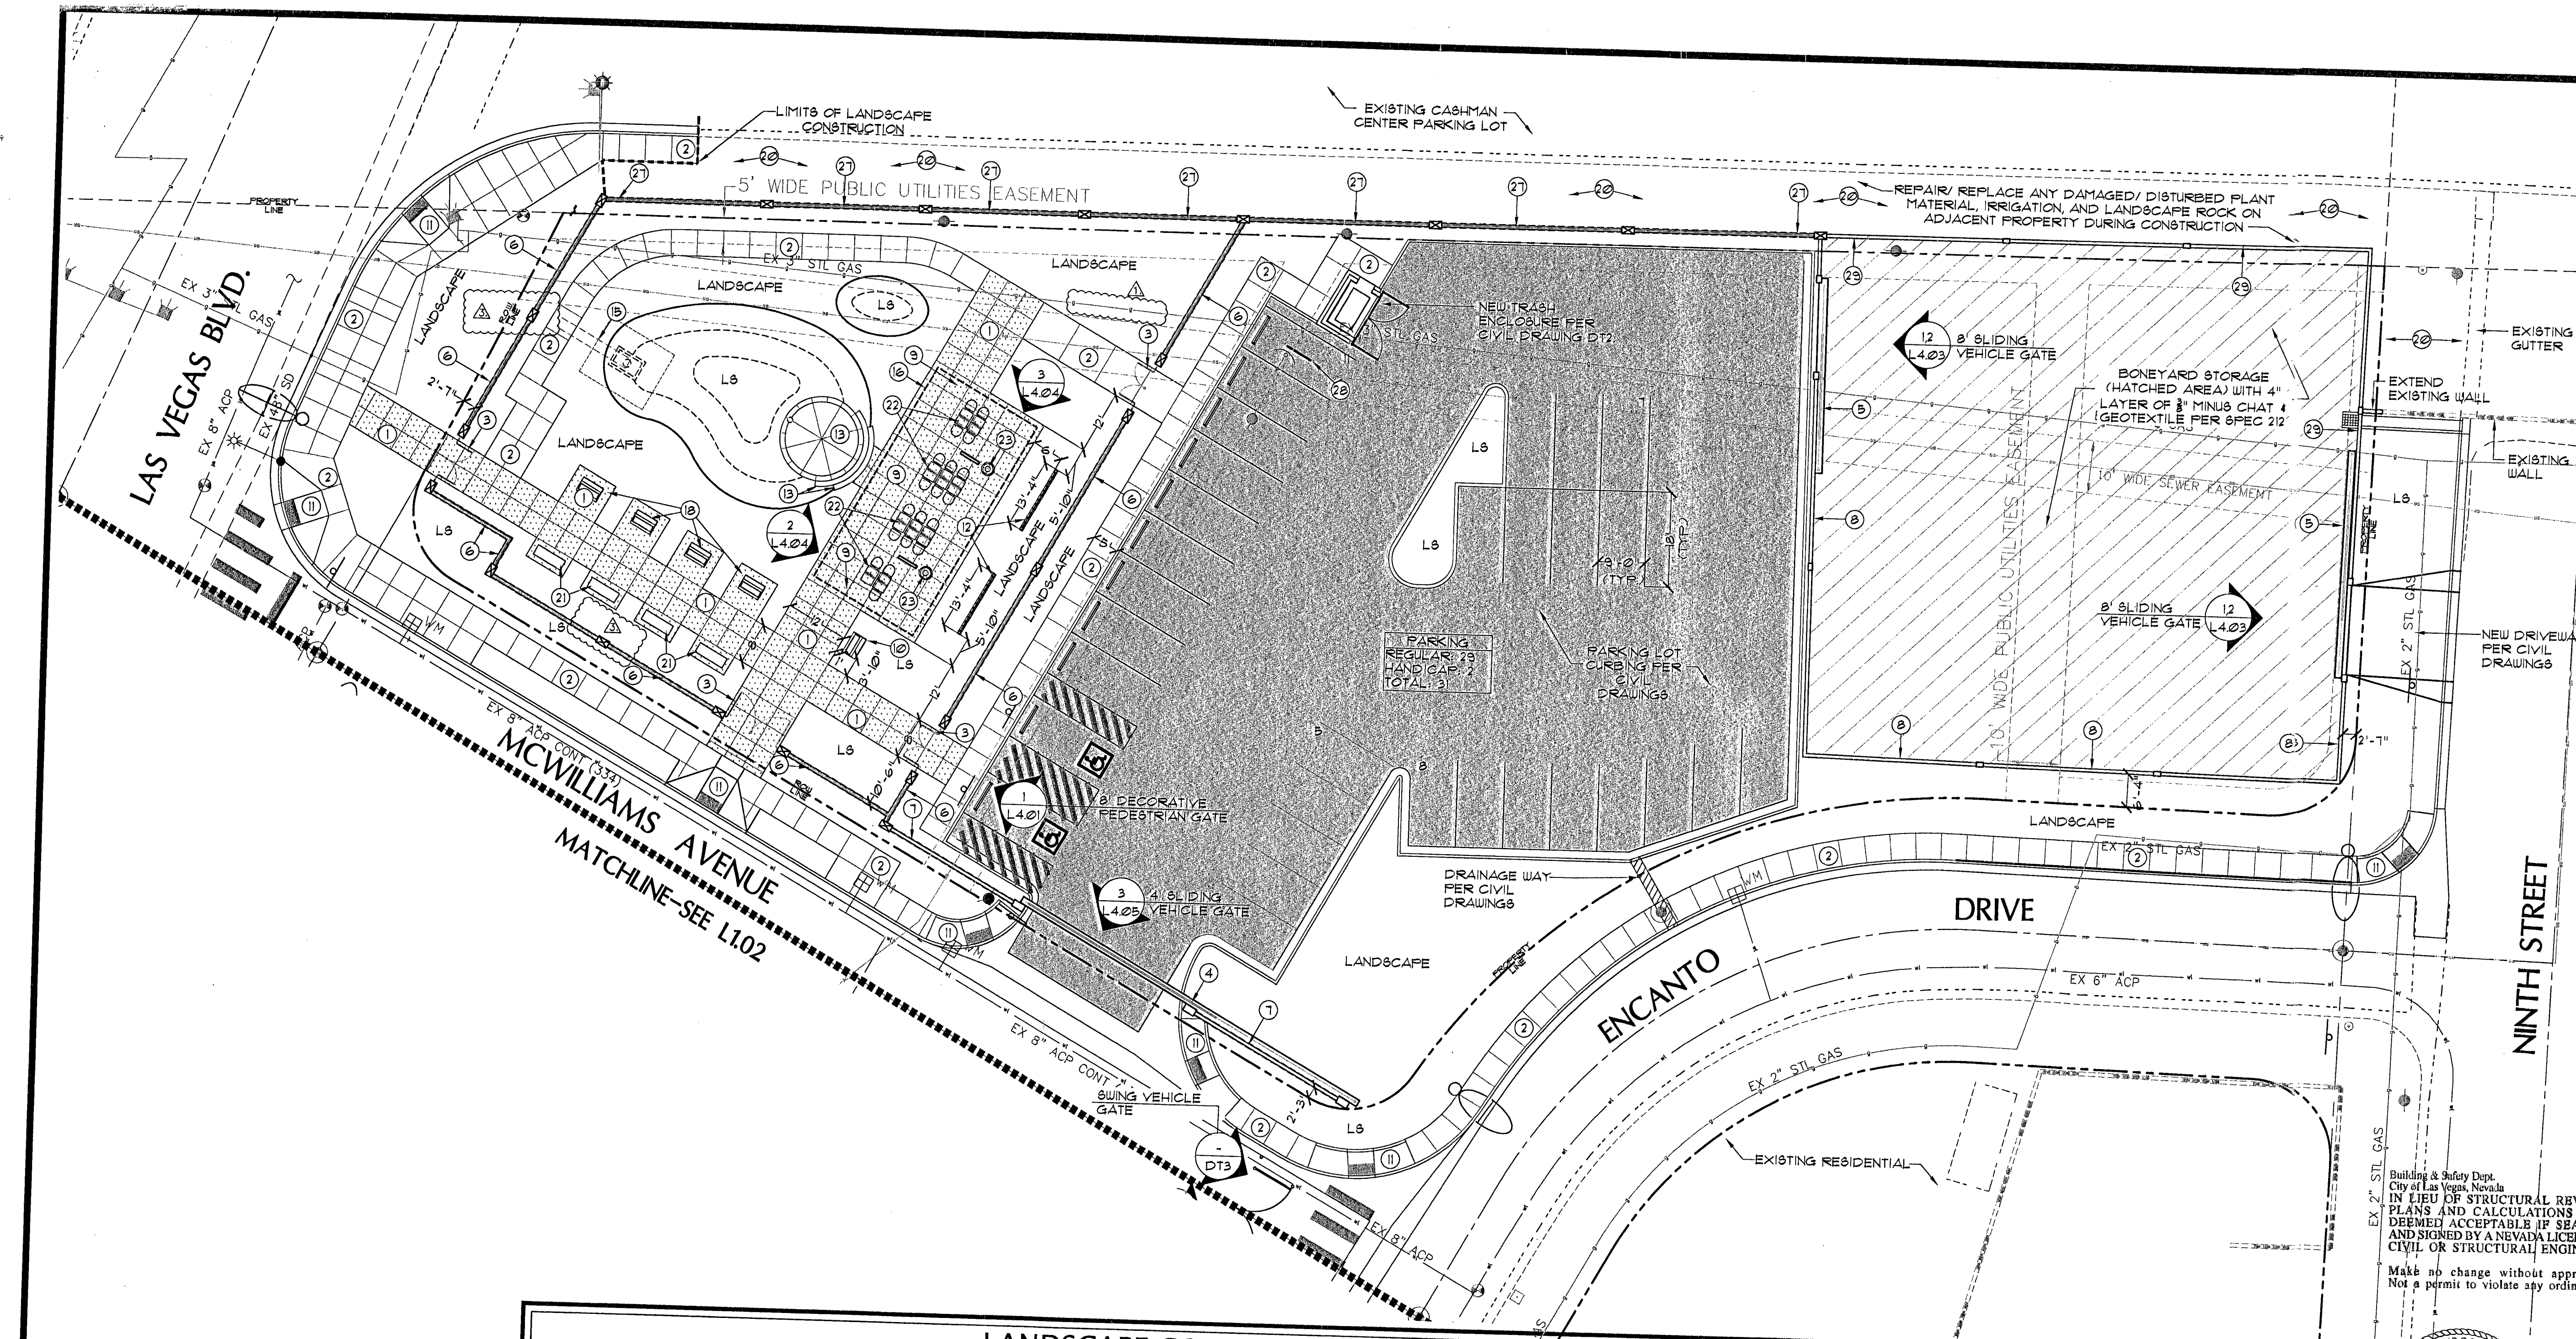


LANDSCAPE CONSTRUCTION LEGEND


(1) COLORED CONCRETE SIDEWALK (COLOR HARDENER: BRICKPORT ANTIQUE ROSE 10/3 OR EQUAL WITH ACID ETCH FINISH AND MATTE SEALER-SEE CIVIL DUGS FOR ADDITIONAL INFORMATION. PROVIDE A 3' SQ. MOCKUP FOR REVIEW AND APPROVAL)	(20) RESTORE AND REPAIR CASHMAN LANDSCAPING, IRRIGATION AND ROCK FROM CONSTRUCTION ACTIVITIES
(2) CONCRETE SIDEWALK (SEE CIVIL DRAWINGS FOR ADDITIONAL INFORMATION)	(21) CONCRETE BENCH PER QUICKCRETE MODEL: WAVE QUAYETTES P31, SEALER, BOARDBUSTERS, AND ANCHOR BOLTS INSTALL PER PER RECOMMENDATIONS TOTAL QTY: 4
(3) 8' DECORATIVE PEDESTRIAN GATE (SEE SHEET L4.03, DETAIL 13)	(22) CONCRETE PAVING TABLE: QUICKCRETE MODEL: QUELBYT WELCOME TABLE COLOR: P3 TEXTURE: T1 WITH SEALER AND ANCHOR BOLTS PER RECOMMENDATIONS TOTAL TABLES QTY: 10 TOTAL CHAIR QTY: 13
(4) 4' SLIDING VEHICLE GATE (SEE SHEET L4.03, DETAIL 3, 4)	(23) STANDARD TRASH RECEPTACLE PER: QUICKCRETE MODEL: GR-MT2136W P311 SEALER BLACK LID AND LINER
(5) 8' SLIDING VEHICLE GATE (SEE SHEET L4.03, DETAIL 1, 2)	(24) 4' PEDESTRIAN EGRESS GATE (SEE SHEET L4.03, DETAIL 2)
(6) LOW CMU WALL 4 TUBULAR STEEL FENCE (SEE SHEET L4.01 DETAIL 1 4 SHEET 86 DETAIL 7)	(25) 8' PEDESTRIAN EGRESS GATE (SEE SHEET L4.03, DETAIL 1)
(7) LOW CMU WALL (SEE SHEET L4.02, DETAIL 2)	(26) NOT USED
(8) 8' CMU WALL (SEE SHEET L4.02, DETAIL 3 4 SHEET 84 DETAIL 20)	(27) CMU RETAINING WALL 4 TUBULAR STEEL FENCE (SEE SHEET L4.01, DETAIL 1 4 SHEET L4.02 DETAIL 1)
(9) 4" COLORED CONCRETE SLAB (COLOR HARDENER: BRICKPORT ANTIQUE ROSE 10/3 OR EQUAL WITH ACID ETCH FINISH AND MATTE SEALER (SEE SHEET 82 DETAIL 3 FOR INFORMATION))	(28) BIKE RACK PER SPEC SECTION 212
(10) CONCRETE MONUMENT AND PLAQUE (SEE SHEET T11 DETAILS 8A-8D AND SPEC SECTION 502 FOR INFORMATION)	(29) 8' CMU RETAINING WALL (SEE SHEET L4.02, DETAIL 43 4 SHEET 86 DETAIL 3, 10)
(11) HANDICAP RAMP PER CIVIL DRAWINGS	
(12) DECORATIVE CMU SCREEN WALL (SEE SHEET L4.02, DETAIL 6, 7, 8 4 SHEET 91 DETAIL 2)	
(13) COLORED CONCRETE STAGE/STEPS (COLOR HARDENER: BRICKPORT BLUSH BEIGE 10/5 FINISH: MED. BROOM SEALED) PROVIDE A 3' SQ. MOCKUP FOR REVIEW AND APPROVAL	
(14) 6' HT PERMANENT CHAINLINK FENCE (SEE DETAILS 3, 4 AND 5 ON SHEET L4.03)	
(15) VERTICAL SIGN PYLON FOR VERTICAL LED SIGN INSTALLATION	
(16) SHADE STRUCTURE (SEE SHEET L4.04, DETAIL 13, 3)	
(17) 8' HT CHAINLINK DOUBLE GATE (SEE SHEET L4.03 DETAIL 6)	
(18) CONCRETE MONUMENT FOR INTERPRETIVE SIGNAGE (SEE SPEC SECTION 502 FOR INFORMATION)	
(19) 6' CHAINLINK FENCE (SEE DETAIL 3, 4, AND 5 ON SHEET L4.03)	

NOTES:
 1. ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH PROJECT DOCUMENTS AND SPECIFICATIONS.
 2. WHEN OBVIOUS DISCREPANCIES EXIST BETWEEN THE DRAWINGS AND THE FIELD THE CONTRACTOR SHALL CONTACT THE LANDSCAPE ARCHITECT IMMEDIATELY FOR RESOLUTION OF SAID CONFLICT.
 3. CONTRACTOR SHALL INSTALL ALL ON-SITE CONCRETE SLABS IN ACCORDANCE WITH THE CIVIL ENGINEERING PLANS.
 4. CONTRACTOR SHALL INSTALL ALL WALLS AND PILASTERS PER STRUCTURAL DUGS AND DETAILS.
 5. CONTRACTOR SHALL COORDINATE ALL NECESSARY SLEEVES AND/OR CONDUIT FOR IRRIGATION DEVICES PRIOR TO LANDSCAPE CONSTRUCTION.

RECEIVED
 JUN 28 2010
 CITY OF LAS VEGAS
 PERMITS

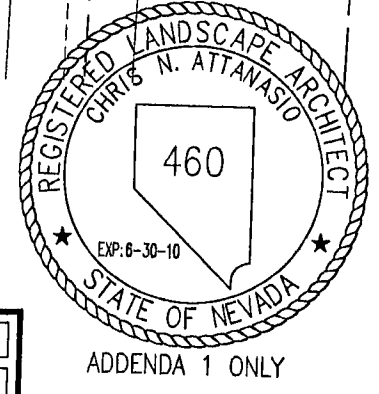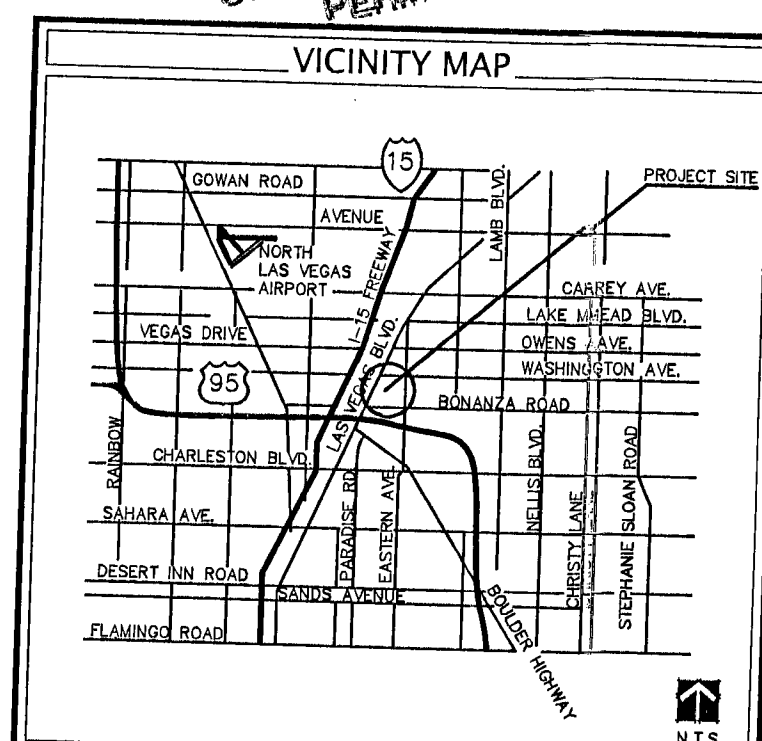

ATTANASIO
 LANDSCAPE
 ARCHITECTURE
 9515 W. Flamingo Rd.
 Suite 210
 Las Vegas, NV 89149
 P: 702.255.7160
 F: 702.255.7169

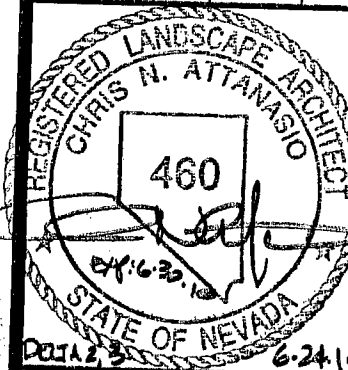

Sheet
L1.01
 25 of 37
 CLV DRAWING NO.
 676-12

REVISIONS	NO.	DATE	DESCRIPTION	APP'D
10-27-09 ADDENDA #1				
06-23-10 REVISION #2 - NOTE REVISION & GATE ADDITION				
06-24-10 REVISION #3 - PLASTER ADDITION				

DEPARTMENT OF PUBLIC WORKS
 400 EAST STEWART
 LAS VEGAS, NEVADA 89101
 (702) 228-6276
poggemeyer
 design group, inc.
 6900 Shady Ranch #110 • Las Vegas, NV 89128 • P: 702.255.8100 • F: 702.255.8370

NEON BONEYARD PARK
 CITY OF LAS VEGAS
 LANDSCAPE CONSTRUCTION PLAN
 SHEET: L1.01

DRAWN BY: RSN/SM/KC
 DESIGNED BY: CNA
 CHECKED BY: CNA
 PROJECT NO: 06-0145
 SCALE: 1/8" = 1'-0"

126018