


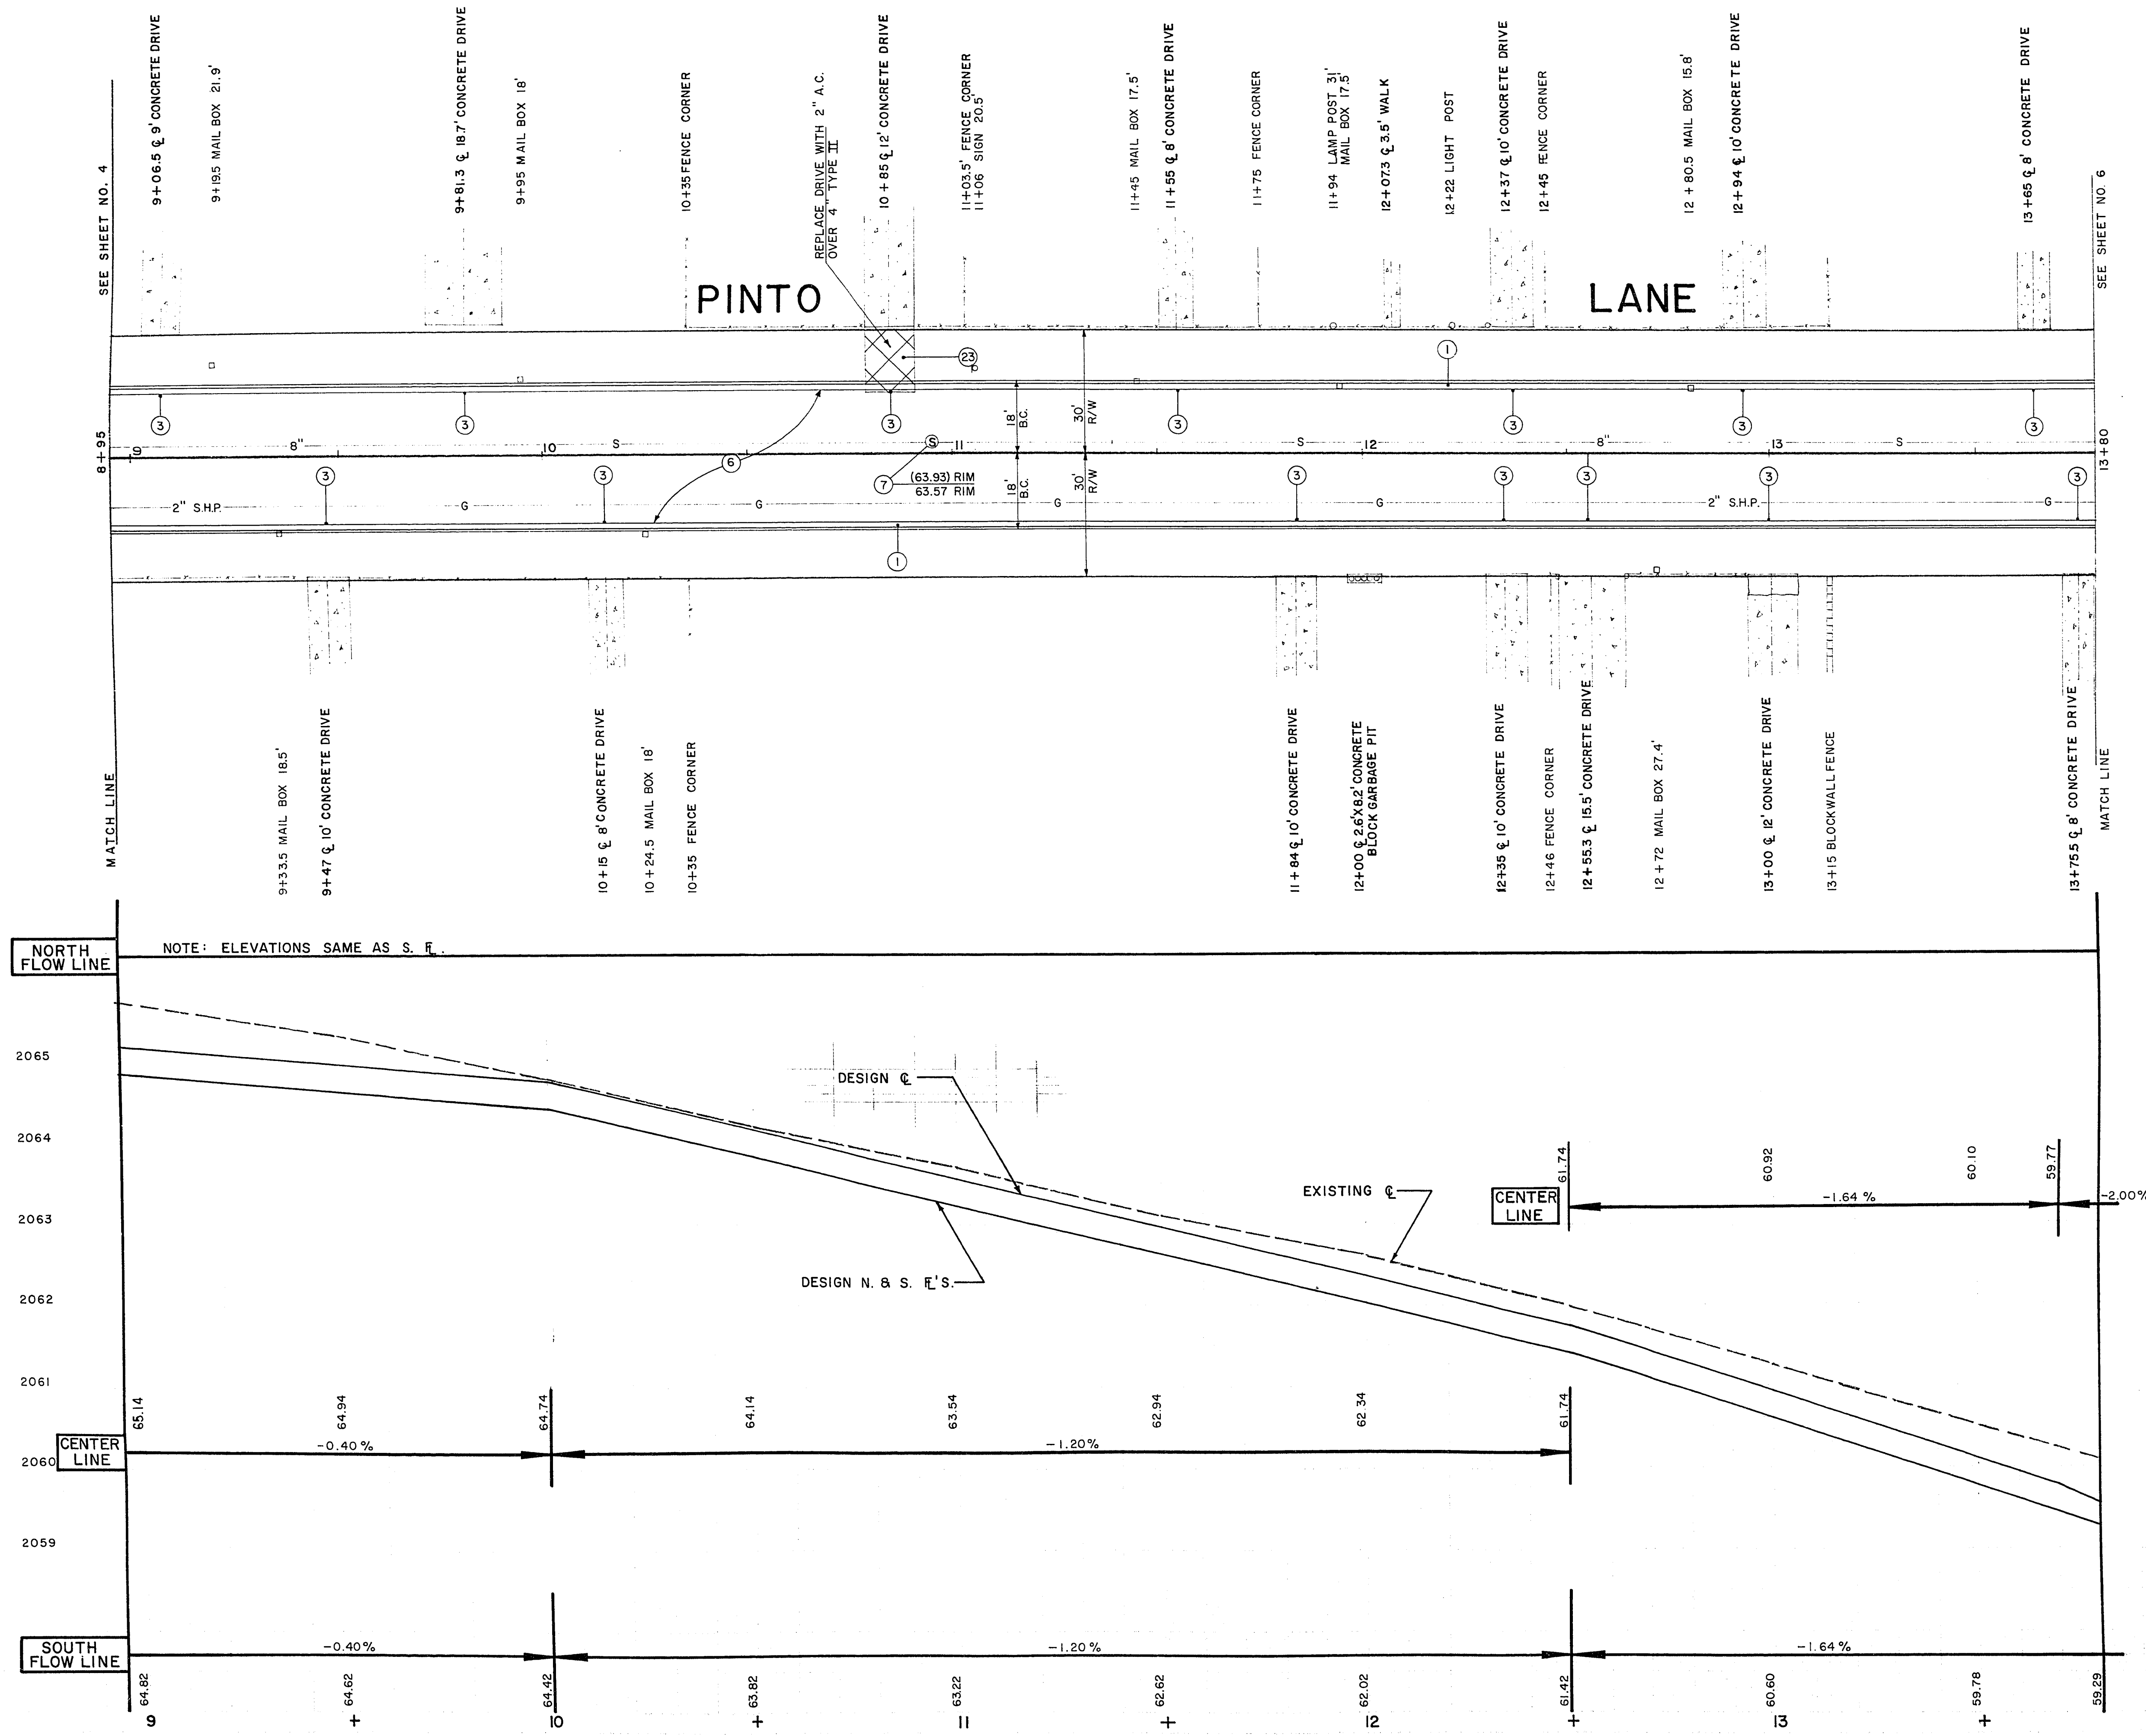

APPROXIMATE QUANTITIES — THIS SHEET			
ITEM	DESCRIPTION	QTY	UNIT
201.1	ROADWAY EXCAVATION	1,235	C.Y.
340.1	CONSTRUCT CONCRETE CURB & GUTTER	970	L.F.
302.1	TYPE I GRAVEL BASE	513	C.Y.
302.2	TYPE II GRAVEL BASE	194	C.Y.
334.4	2 INCH ASPHALTIC CONCRETE PAVEMENT	1,742	S.Y.
333.1	BITUMINOUS FOG SEAL	1,742	S.Y.
512.51	ADJUST MANHOLE	1	EA.

BENCH MARK: RAILROAD SPIKE IN POWER POLE NORTH EAST CORNER OF RANCHO ROAD AND PINTO LANE. ELEVATION 2075.91

RT	DR	DATE
7	D.P.W.	11/11/68
5	ENGR	11/11/68
3	FIELD	11/11/68
4	RTW	11/11/68
6	SERV.	11/11/68
1	SUBD	11/11/68
2	TRAF.	11/11/68
2	UTIL	11/11/68

CITY OF LAS VEGAS NEVADA
ENGINEERING DEPT.

PINTO LANE
RANCHO ROAD TO HIGHLAND DRIVE
STATION 8+95 TO STATION 13+80

S.A.D. 484 UNIT I DATE 3-11-68 SC.HD 1"=20'

DES. ANDERSON 11-25-66 SC.M 1"=1'

DR. GODDARD-PATTERSON 11-25-66 F.BK. NO. 65-3 X

CKD. [Signature] 11-25-66 P.O. NO.

APPROVED BY CITY ENGR. [Signature] 11/11/68 DRAWING NO. 484