


0+00 VEGAS DRIVE

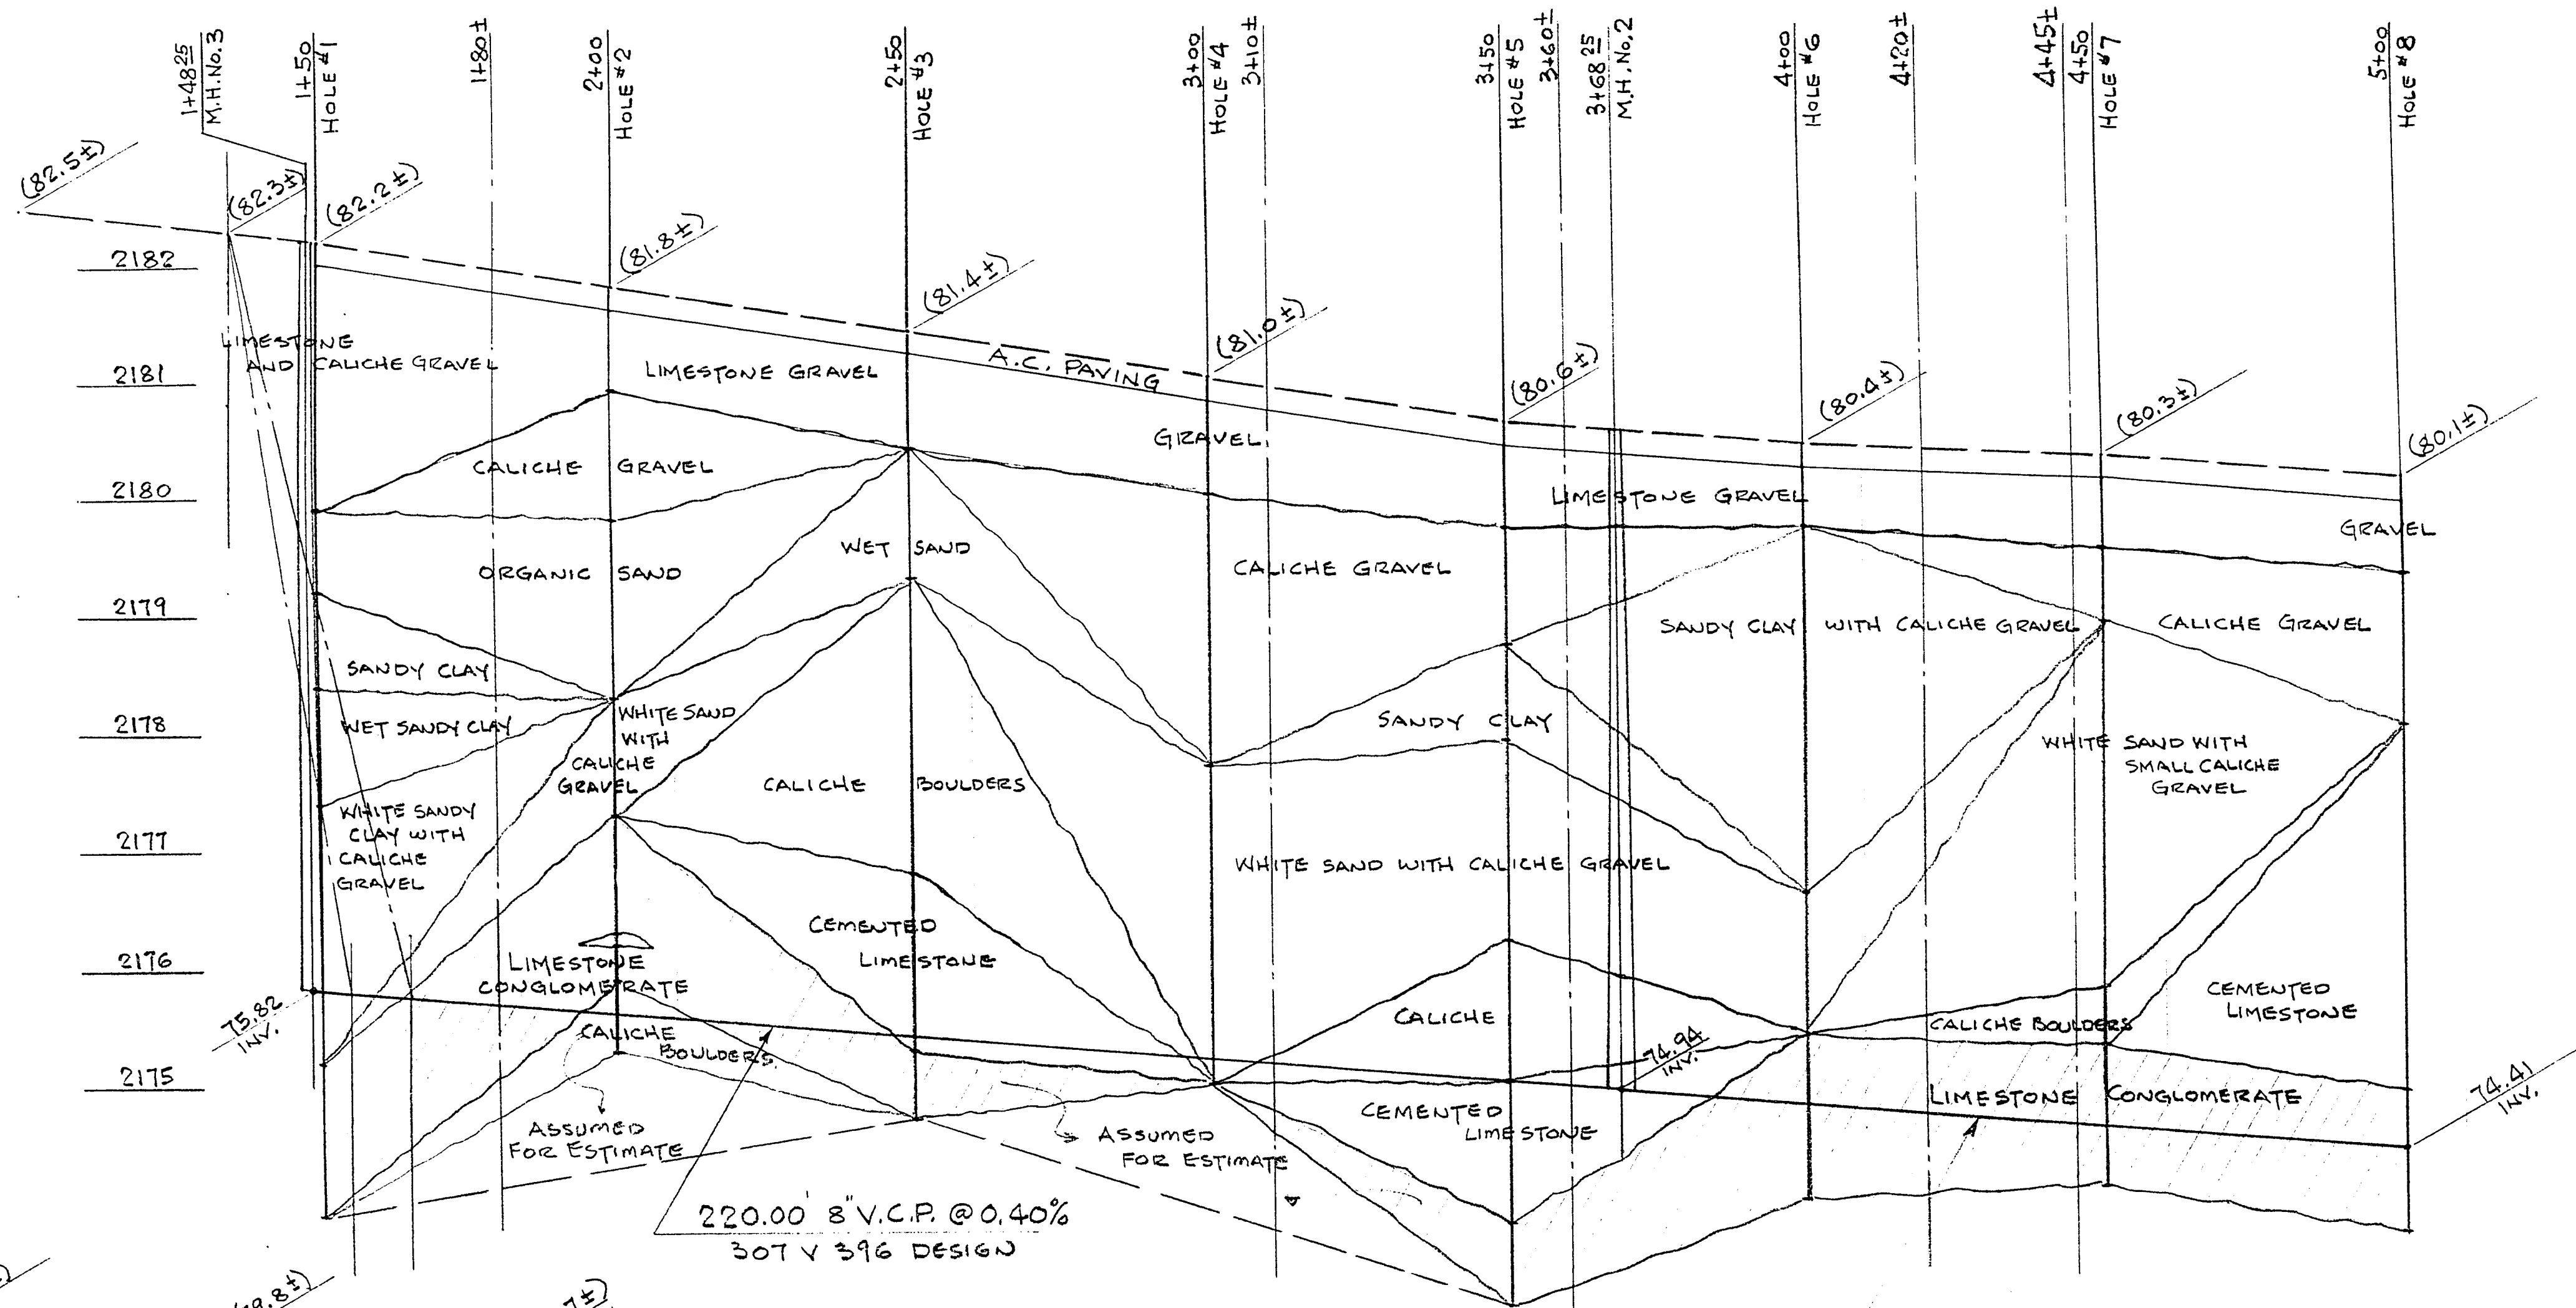

WITH ASSUMED STRAIGHT LINES BETWEEN HOLES.
APPROXIMATE EXCAVATION QUANTITIES
(WITH 0% ALLOWANCE FOR BEDDING)

QUANTITIES FOR	PER DRILL LOG.	EASY TO DRILL	MODERATE	HARD TO DRILL	TOTALS
24\" WIDE TRENCH	8\" V.C.P. SEWER	245 CY.	106 CY.	57 CY.	408 CY.
20\" WIDE TRENCH	4\" V.C.P. LATERALS	140 CY.	34 CY.	16 CY.	190 CY.
TOTALS		385 CY.	140 CY.	73 CY.	598 CY.

EXCAVATION - UNCLASSIFIED * EXCAVATION - CLASSIFIED
* INCLUDES 5% OVERBREAK ALLOWANCE

LEGEND (HOLES #1 THRU #17 PER DRILL LOG NOV. 68)

UNCLASSIFIED - EASY TO DRILL	
CLASSIFIED	
MODERATE	
HARD TO DRILL	

CONTRACT
DRAWING
FEB 3 1969

CITY OF LAS VEGAS NEVADA
DEPARTMENT OF PUBLIC WORKS
SERVICES DIVISION

- SEWER -
PARKCHESTER DRIVE - BLUESTONE DRIVE
PROFILE OF DRILL LOG.

W.O. NO. 4795	F.B.K. NO. 67-3X	DATE	DRAWING NO.
SC. (H) 1\" = 20'	SC. (V) 1\" = 1'		479
DES.			
DR. GIREIG		20 JAN 69	FILE NO.
APPROVED BY DIRECTOR OF PUBLIC WORKS		1/27/69	307-V396
			SHEET 45 OF 45

19-1-71