
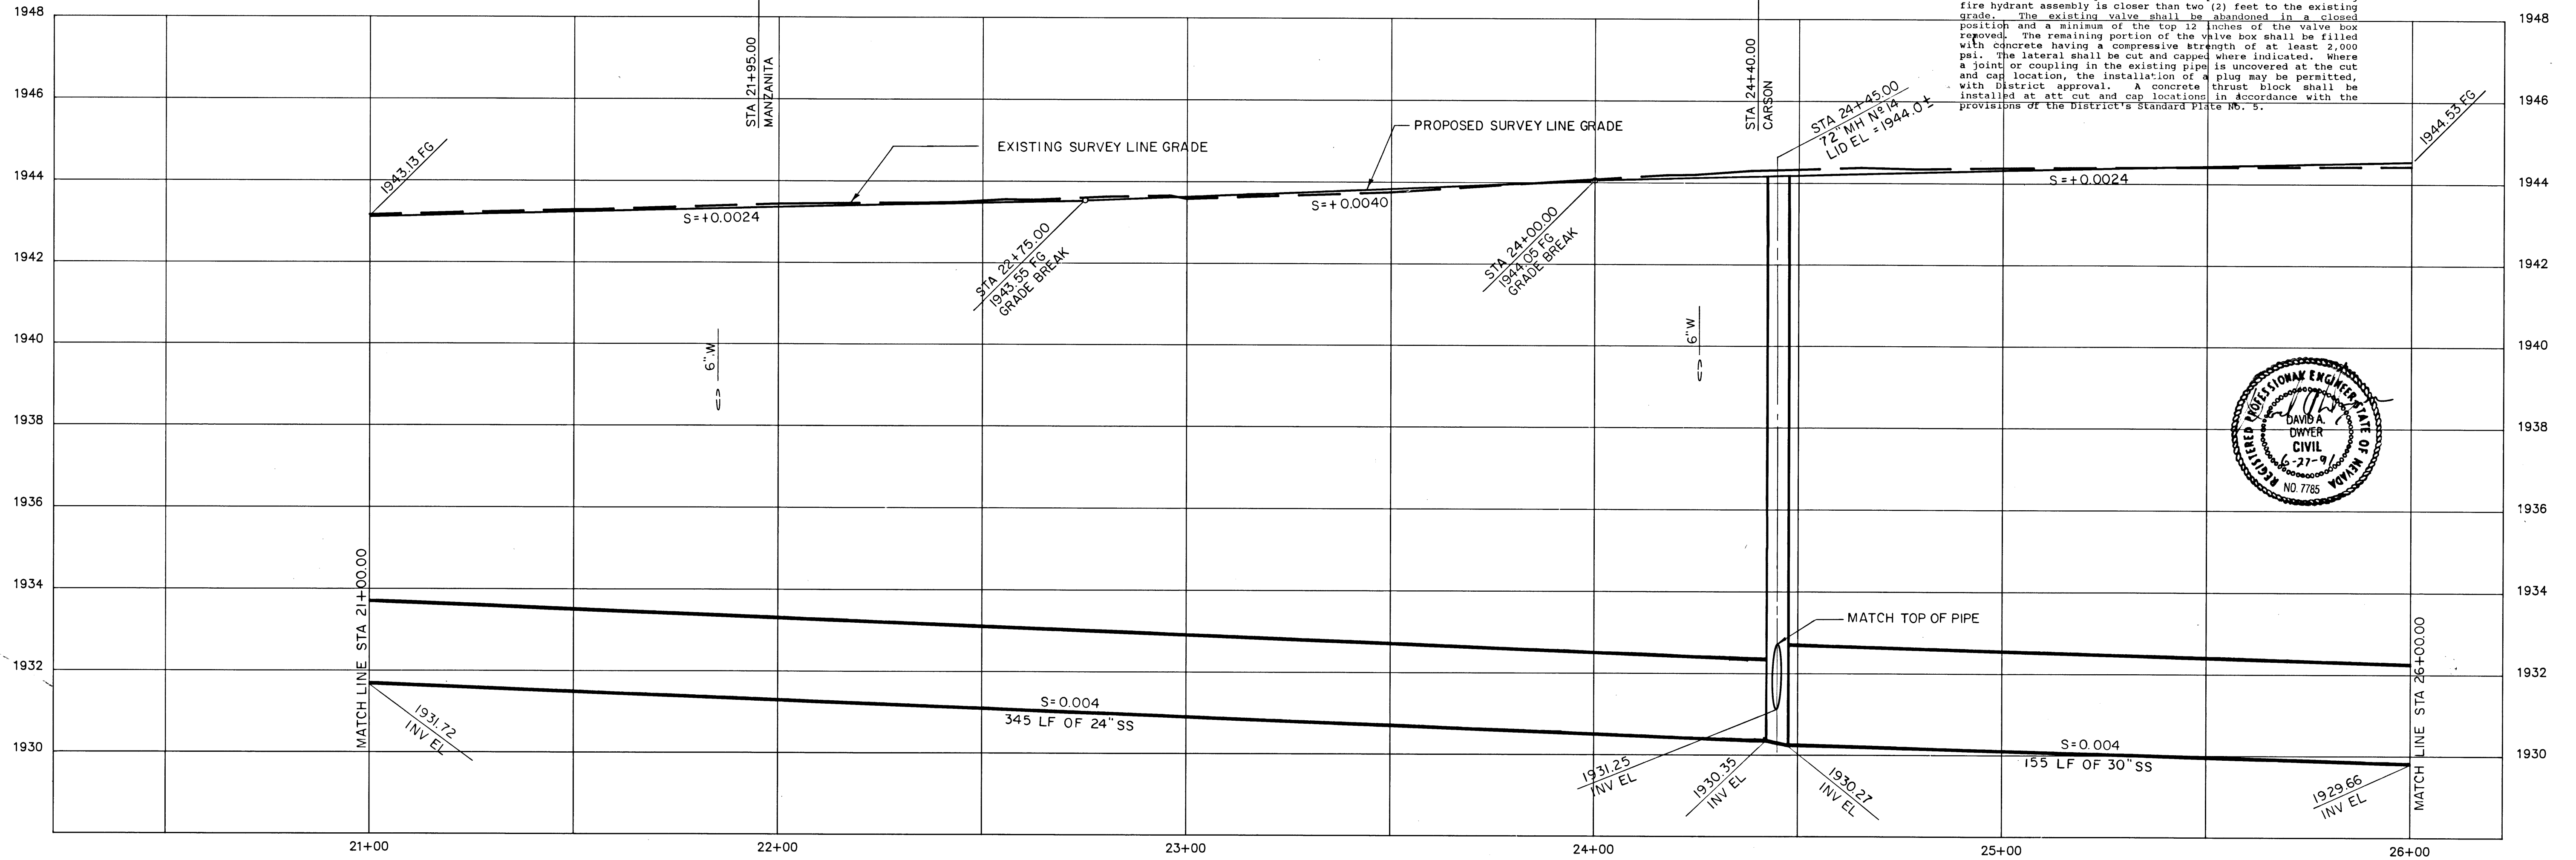



# NOTES

- 1 REMOVE POLE BETWEEN 15th STREET & 14th STREET. REMOVE OH CABLE TO POLE AT 14th STREET. CITY WILL DISCONNECT WIRES AT 14th ST. POLE
- 2 NEW EAST CURB & GUTTER WITH FLOW LINE @ SLOPE = 0.0024 STA 21+00 TO 22+43.1
- 3 NEW EAST CURB & GUTTER WITH FLOW LINE @ SLOPE = 0.0024 STA 22+68.8 TO 26+00
- 4 INSTALL WHEELCHAIR RAMP
- 5 INSTALL NEW WATER METER & BOX
- 6 INSTALL NEW FIRE HYDRANT
- 7 REMOVE AND REPLACE SIDEWALK PANEL

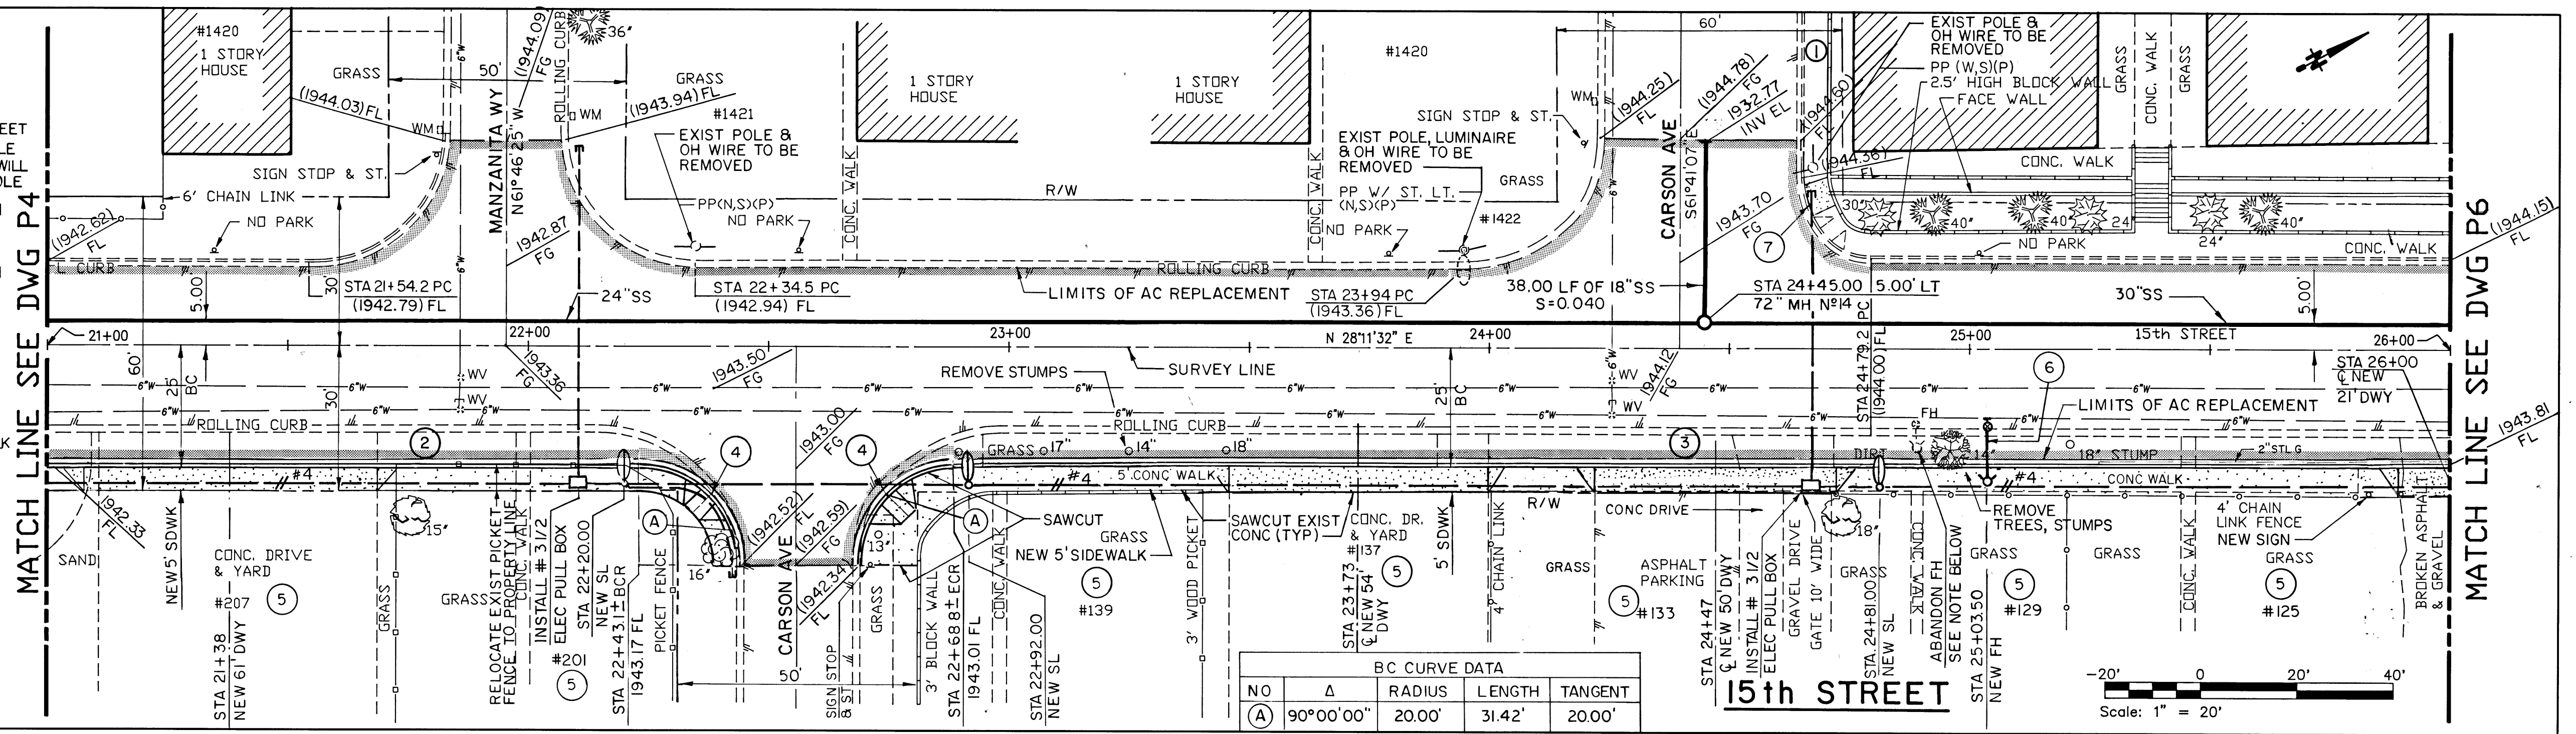

## FIRE HYDRANT AND LATERAL ABANDONMENT (Existing Lateral to be Abandoned)

Where shown on the drawing(s), the Contractor shall abandon the existing fire hydrant(s) by removing both the upper and lower barrels of the fire hydrant so that no portion of the remaining fire hydrant assembly is closer than two (2) feet to the existing grade. The existing valve shall be abandoned in a closed position and a minimum of the top 12 inches of the valve box removed. The remaining portion of the valve box shall be filled with concrete having a compressive strength of at least 2,000 psi. The lateral shall be cut and capped where indicated. Where a joint or coupling in the existing pipe is uncovered at the cut and cap location, the installation of a plug may be permitted, with District approval. A concrete thrust block shall be installed at all cut and cap locations in accordance with the provisions of the District's Standard Plans No. 5.

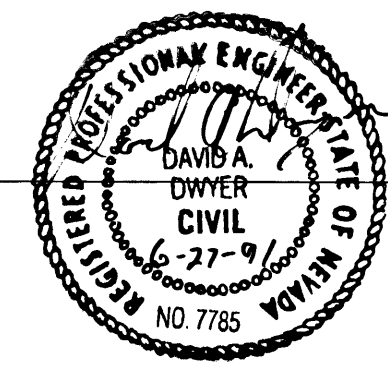

|      |      |    |          |
|------|------|----|----------|
| MARK | DATE | BY | REVISION |
|      |      |    |          |
|      |      |    |          |
|      |      |    |          |

|               |            |              |
|---------------|------------|--------------|
| DESIGNED: MSL | DRAWN: WJH | CHECKED: DAD |
|---------------|------------|--------------|

|                                 |                                    |               |
|---------------------------------|------------------------------------|---------------|
| DWGNAME: AL-OCPS                | PROJECT ENGINEER: Michael J. Laska | DATE: 7/11/91 |
| PROJECT MANAGER: David A. Dwyer | DATE: 7-11-91                      | DATE: 7-11-91 |

|                               |                                                                  |
|-------------------------------|------------------------------------------------------------------|
| BOYLE ENGINEERING CORPORATION | 1785 E. Sahara Ave. 300<br>Las Vegas, NV 89104<br>(702) 731-5511 |
|-------------------------------|------------------------------------------------------------------|

|                   |
|-------------------|
| CITY OF LAS VEGAS |
|-------------------|

|                                  |
|----------------------------------|
| OGDEN/CEDAR SEWER INTERCEPTOR    |
| 15th STREET                      |
| PLAN & PROFILE STA 21+00 - 26+00 |

|            |
|------------|
| DRAWING P5 |
| OF 29      |
| 307-V681   |

25-1-66