


- DEMOLITION NOTES**
1. DEMOLITION AND REMOVAL OF ALL BUILDINGS AND STRUCTURES SHOWN ON THE DRAWINGS, INCLUDING FOOTINGS, INTERIORS, UTILITIES, AND SUBSTRUCTURES, AS TO BE DEMOLISHED.
 2. DEMOLITION AND REMOVAL OF ALL A.C. AND CONCRETE PAVEMENT, CURBS, GUTTERS, DRAINS AND DRAINLINES, FENCING AND WALLS.
 3. DEMOLITION AND REMOVAL OF ALL TREES, SHRUBS, PLANTS AND VEGETATION INCLUDING ROOT BALLS.
 4. DEMOLITION AND REMOVAL OF ALL LANDSCAPE IRRIGATION FACILITIES, INCLUDING PIPING, CONTROLLERS, SPRINKLERS. CONTRACTOR IS RESPONSIBLE FOR PLUGGING LINES AT WORK LIMITS AND MAINTAINING OFFSITE SYSTEMS WHERE PLUGGED AS OPERATIONAL.
 5. DEMOLITION AND REMOVAL OF ALL LIGHTING FACILITIES INCLUDING POLES, LIGHTS, FOUNDATIONS AND CONDUIT.
 6. BACKFILL TO EXISTING GRADE OF ALL EXCAVATIONS RESULTING FROM THE DEMOLITION WORK TO 90% OF MAXIMUM DRY DENSITY (ASTM D1557), PER SOILS REPORT.
 7. DEMOLITION AND REMOVAL OF ALL OTHER UTILITIES NOT REMOVED BY EDISON OR THE GAS COMPANY.
 8. DISCONNECT ANY ELECTRIC, TELEPHONE, GAS, WATER, STEAM OR OTHER LINES SERVING THE SITE AS PER THE RULES AND REGULATIONS OF AUTHORITIES HAVING JURISDICTION, OF AS DIRECTED. CONTRACTOR SHALL CONTACT ALL UTILITY COMPANIES AS NECESSARY AND IS SOLELY RESPONSIBLE FOR DETERMINING SYSTEM OPERATION AND MAINTAINING SERVICE TO OFFSITE FACILITIES.
 9. TAKE ALL MEASURES NECESSARY TO PREVENT DUST AND NOISE NUISANCE. SPRINKLE WITH WATER AS REQUIRED, AND USE EQUIPMENT AND PROCEDURES WHICH KEEP SUCH NUISANCES TO ACCEPTABLE MINIMUMS. USE COVERED DEBRIS BOXES AND TRUCKS TO REMOVE MATERIALS FROM SITE.
 10. REMOVAL OF UNDERGROUND TANKS, IF LOCATED, IS ADDITIONAL WORK AND SHALL COMPLY WITH ALL APPLICABLE REGULATIONS OF STATE, LOCAL AND FEDERAL AGENCIES INVOLVED IN CONTAINMENT AND CLEAN UP OF TOXIC AND/OR FLAMMABLE MATERIALS. OBTAIN ALL REQUIRED APPROVALS BEFORE BEGINNING WORK. COORDINATE WITH THE TESTING AGENCY EMPLOYED BY THE OWNER TO ENSURE THAT SOIL CONTAMINATION IS NOT CAUSED BY THE TANK REMOVAL PROCEDURES. REMOVAL OF CONTAMINATED SOILS IS ALSO ADDITIONAL WORK.
 11. ALL EXISTING MATERIALS AND EQUIPMENT TO BE REMOVED AND MATERIALS RESULTING FROM DEMOLITION BECOME THE PROPERTY OF THE CONTRACTOR. DISPOSE OF ALL DEMOLISHED OR SALVAGED MATERIALS LEGALLY OFF THE SITE. COMPLY WITH ALL LEGAL HAULING AND DISPOSAL REQUIREMENTS. ALLOW NO DEBRIS TO ACCUMULATE ON SITE.
 12. ERECT A 6-FOOT HIGH CHAIN LINK FENCE AROUND SITE AND MAINTAIN DURING CONSTRUCTION.

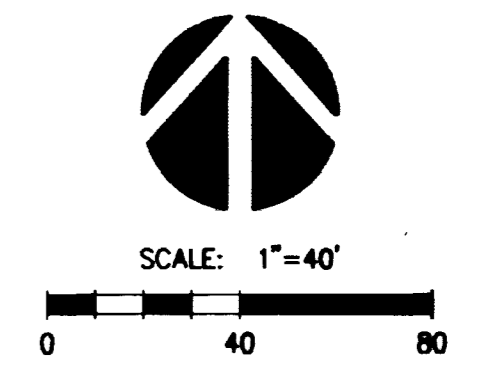

Avoid cutting underground utility lines. It's costly.
Call before you Dig.
 1-800-227-2600

- DEMOLITION NOTES**
- | | |
|----|--|
| 1 | REMOVE A.C. PAVEMENT |
| 2 | REMOVE CONCRETE |
| 3 | REMOVE CURB & GUTTER |
| 4 | REMOVE CURB ONLY |
| 5 | REMOVE RAILROAD TRACKS |
| 6 | REMOVE WALL |
| 7 | REMOVE LANDSCAPE AND ASSOC. FACILITIES |
| 8 | REMOVE LIGHT |
| 9 | REMOVE SHEDS OR BUILDINGS |
| 10 | REMOVE P.C.C. VALLEY GUTTER |
| 11 | SKIPPED |
| 12 | REMOVE FENCE |
| 13 | REMOVE FIRE HYDRANT |
| 14 | REMOVE HARDSCAPE |
| 15 | REMOVE POLES |
| 16 | PROTECT IN PLACE |

- LEGEND**
- | | | | |
|--|--------------------------------------|--|-----------------------------|
| | REMOVE CURB & GUTTER | | REMOVE SHEDS OR BUILDINGS |
| | REMOVE R.R. TRACKS | | REMOVE P.C.C. VALLEY GUTTER |
| | REMOVE WALL/FENCE/SIGN | | REMOVE EXIST. CONCRETE |
| | REMOVE LANDSCAPE & ASSOC. FACILITIES | | EXISTING FACILITY/CURB |
| | REMOVE PAVEMENT | | PROPOSED FACILITY/CURB |
| | | | LIMITS OF DEMOLITION |

EXISTING UNDERGROUND STRUCTURES
 THE EXISTENCE AND LOCATION OF ANY UNDERGROUND PIPES OR CONDUITS ARE NOT SHOWN ON THESE PLANS. THE CONTRACTOR IS REQUIRED TO TAKE THE PRECAUTIONARY MEASURES TO PROTECT THE UTILITY LINES AND ANY OTHER LINES NOT OF RECORD OR NOT SHOWN ON THESE PLANS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO NOTIFY THE OWNERS OF THE UTILITIES OR STRUCTURES CONCERNED BEFORE STARTING WORK. CONTRACTOR FURTHER ASSUMES ALL LIABILITY AND RESPONSIBILITY FOR THE UNDERGROUND UTILITY PIPES, CONDUITS OR STRUCTURES SHOWN OR NOT SHOWN ON THESE PLANS. LOCATE ALL UTILITIES BEFORE CONSTRUCTION.

LAS VEGAS REVIEW-JOURNAL
 1111 W. BONANZA ROAD
 LAS VEGAS, NEVADA 89125-0070
 702-383-0466

DEMOLITION PLAN

LAS VEGAS REVIEW-JOURNAL
PRESS ADDITION

JOEL S. CRAWFORD
 CIVIL ENGINEER-STATE OF NEVADA
 No. 12274

3/18/98

SHEET D-1
 8 OF 11 SHEETS
 DRAWING NO. 107V2843

REVISION

DATE

BY

