


DOWNTOWN ENTRY CORRIDOR IMPROVEMENTS: CONTRACT 2

BID NO. 96.1730.24

BID ITEM	DESCRIPTION	QUANTITY	UNIT	BID ITEM	DESCRIPTION	QUANTITY	UNIT	BID ITEM	DESCRIPTION	QUANTITY	UNIT
200.01	CONSTRUCTION CONFLICTS AND CONTINGENCIES	N/A	F.A.	613.01	TYPE "L" CURB AND GUTTER	3500	L.F.	623 M.19	4 INCH PVC IRRIGATION SLEEVE (SCH 40)	3640	L.F.
202.01	REMOVE CURB AND GUTTER	4550	L.F.	613.02	CONCRETE DRIVEWAY (MODIFIED)	14700	S.F.	623 M.20	4 INCH PVC (SCH 40) (NEVADA POWER)	900	L.F.
202.02	REMOVE CONC. CROSS GUTTER	2900	S.F.	613.03	2" TEMPORARY CONCRETE SIDEWALK	7300	S.F.	623 M.21	6 INCH PVC (SCH 40) (NEVADA POWER)	1800	L.F.
202.03	REMOVE CONC. DRIVEWAYS	11500	S.F.	613.04	4" PERMANENT CONCRETE SIDEWALK	5700	S.F.	623 M.22	PARKING METER SUPPORT	7	EA.
202.04	REMOVE CONCRETE MEDIAN	1100	L.F.	613.05	TACK ON CURB	925	L.F.	624.01	TRAFFIC CONTROL	1	L.S.
202.05	REMOVE/REPLACE PRIVATE SIGN OR LIGHT	11	E.A.	613.06	TACK ON ISLAND	1800	S.F.	627.01	PERMANENT SIGN GROUND MOUNTED	159	EA.
202.06	REMOVE AND SALVAGE PARKING METER SUPPORT	12	E.A.	613.07	NDOT TYPE 3 CURB	2250	L.F.	627.02	REMOVE AND SALVAGE EXISTING SIGN	85	EA.
202.07	REMOVE EXIST. DROP INLET	4	E.A.	613.08	NDOT TYPE 5 CURB & GUTTER	2200	L.F.	627.03	PERMANENT SIGN PANELS (OVERHEAD)	300	S.F.
202.08	REMOVE EXISTING PAVEMENT	19660	S.Y.	622.01	CONSTRUCTION SURVEYING	1	L.S.	627.04	PERMANENT OVERHEAD SIGN SUPPORT STRUCTURE	1	L.S.
202.09	REMOVE CONCRETE SIDEWALK	20000	S.F.	623 T.01	TRAFFIC SIGNAL AT LAS VEGAS BLVD/OAKEY BLVD	1	L.S.	628.01	COLD POLYMER PAVEMENT MARKING FILM	4450	S.F.
202.10	REMOVE EXISTING STREETLIGHT & FOUNDATION	23	E.A.	623 T.02	TRAFFIC SIGNAL AT LAS VEGAS BLVD/WYOMING AVENUE	1	L.S.	628.02	COLD POLYMER PAVEMENT LEGEND ("ARROWS" OR "ONLY")	26	EA.
202.11	REMOVE EXISTING PLANTER BOXES	1	L.S.	623 T.03	TRAFFIC SIGNAL AT LAS VEGAS BLVD/4TH	1	L.S.	628.03	YELLOW REFLECTIVE PAINT	250	S.F.
202.12	COLD PLANE AC (3/4" DEPTH)	10000	S.Y.	623 T.04	TRAFFIC SIGNAL AT CHARLESTON/4TH	1	L.S.	628.04	RED REFLECTIVE PAINT	1000	S.F.
202.13	REMOVE EXISTING ONSITE IMPROVEMENTS	1	L.S.	623 T.05	2" PVC INTERCONNECT CONDUIT (TRAFFIC SIGNAL)(SCH 40)	3700	L.F.	629.01	ADJUST WATER VALVE BOX	20	EA.
203.01	ROADWAY EXCAVATION	12000	C.Y.	623 T.06	25 PAIR INTERCONNECT CABLE	5300	L.F.	629.02	ABANDON EXISTING WATER METER	15	EA.
302.01	TYPE II AGGREGATE BASE	7990	C.Y.	623 T.07	NO. 5 PULLBOX (INTERCONNECT)	20	EA.	629.03	RELOCATE EXISTING FIRE HYDRANT	1	EA.
402.01	PLANTMIX BITUMINOUS SURFACE (5" THICKNESS)	20000	S.Y.	623 L.08	STREETLIGHT FOUNDATION BASE (SINGLE MOUNT)	28	EA.	631.01	STREET NAME SIGN AND SUPPORT	8	EA.
402.02	PLANTMIX BITUMINOUS SURFACE (4" THICKNESS)	2140	S.Y.	623 L.09	STREETLIGHT FOUNDATION BASE (DOUBLE MOUNT)	10	EA.	633.01	NONREFLECTIVE PAVEMENT MARKER	1300	EA.
402.03	PLANTMIX BITUMINOUS SURFACE (2" THICKNESS)	775	S.Y.	623 L.10	STREETLIGHT POLE COMPLETE (SINGLE MOUNTED FIXTURE)	28	EA.	633.02	REFLECTIVE PAVEMENT MARKER	450	EA.
402.04	PLANTMIX BITUMINOUS SURFACE (VARIABLE THICKNESS)	1980	S.Y.	623 L.11	STREETLIGHT POLE COMPLETE (DOUBLE MOUNTED FIXTURE)	10	EA.	670.01	GEOTEXTILE FABRIC	19500	S.Y.
403.01	PLANTMIX BITUMINOUS OPEN GRADED SURFACE (3/4")	18500	S.Y.	623 L.12	STANDARD STREETLIGHT COMPLETE	9	EA.	672.01	GEOGRID	1500	S.Y.
603.01	12" RCP CL IV	620	L.F.	623 L.13	1 1/4 INCH PVC LIGHTING CONDUIT (SCH 40)	2740	L.F.				
603.02	18" RCP CL III	1315	L.F.	623 L.14	2 INCH PVC LIGHTING CONDUIT (SCH 40)	4170	L.F.				
609.01	TYPE 1A MANHOLE	6	EA.	623 L.15	NO. 3 1/2 PULLBOX (LIGHTING)	45	EA.				
609.02	2' MODIFIED MANHOLE	7	EA.	623 L.16	SERVICE PEDESTAL (LIGHTING)	3	EA.				
609.03	DROP INLET TYPE A	10	EA.	623 L.17	1 1/4 INCH PVC (SCH 40) (FUTURE SPECIAL LIGHTING)	1750	L.F.				
609.04	NDOT TYPE 3 DROP INLET (MODIFIED)	7	EA.	623 L.18	2 INCH PVC (SCH 40) (FUTURE SPECIAL LIGHTING)	3250	L.F.				
609.05	VERTICALLY ADJUST MANHOLE FRAME AND COVER	13	EA.								

Time: 12:00:55
Date: 6/05/1996
Drawing File: K:\990302\PH2\Q-1

NO.	REVISIONS	DATE	BY

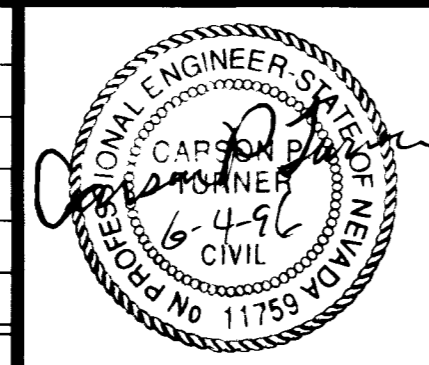

**Kimley-Horn
and Associates, Inc.**

Las Vegas, Nevada

© 1996

DESIGNED BY CPT
DRAWN BY CPT
CHECKED BY CPT
NOTE BOOK NO.



DOWNTOWN CORRIDOR IMPROVEMENTS
CITY OF LAS VEGAS DEPT. OF PUBLIC WORKS
LAS VEGAS, NEVADA

DATE 6/96
SCALE NA

SUMMARY OF QUANTITIES

DWG. NO.
107-V-2288B
FILE NO.
9903.02
SHEET 3 OF 46
Q-1

