


LEGEND:

--- PATH OF TRAVEL

(15/15) DETAIL NUMBER SHEET NUMBER

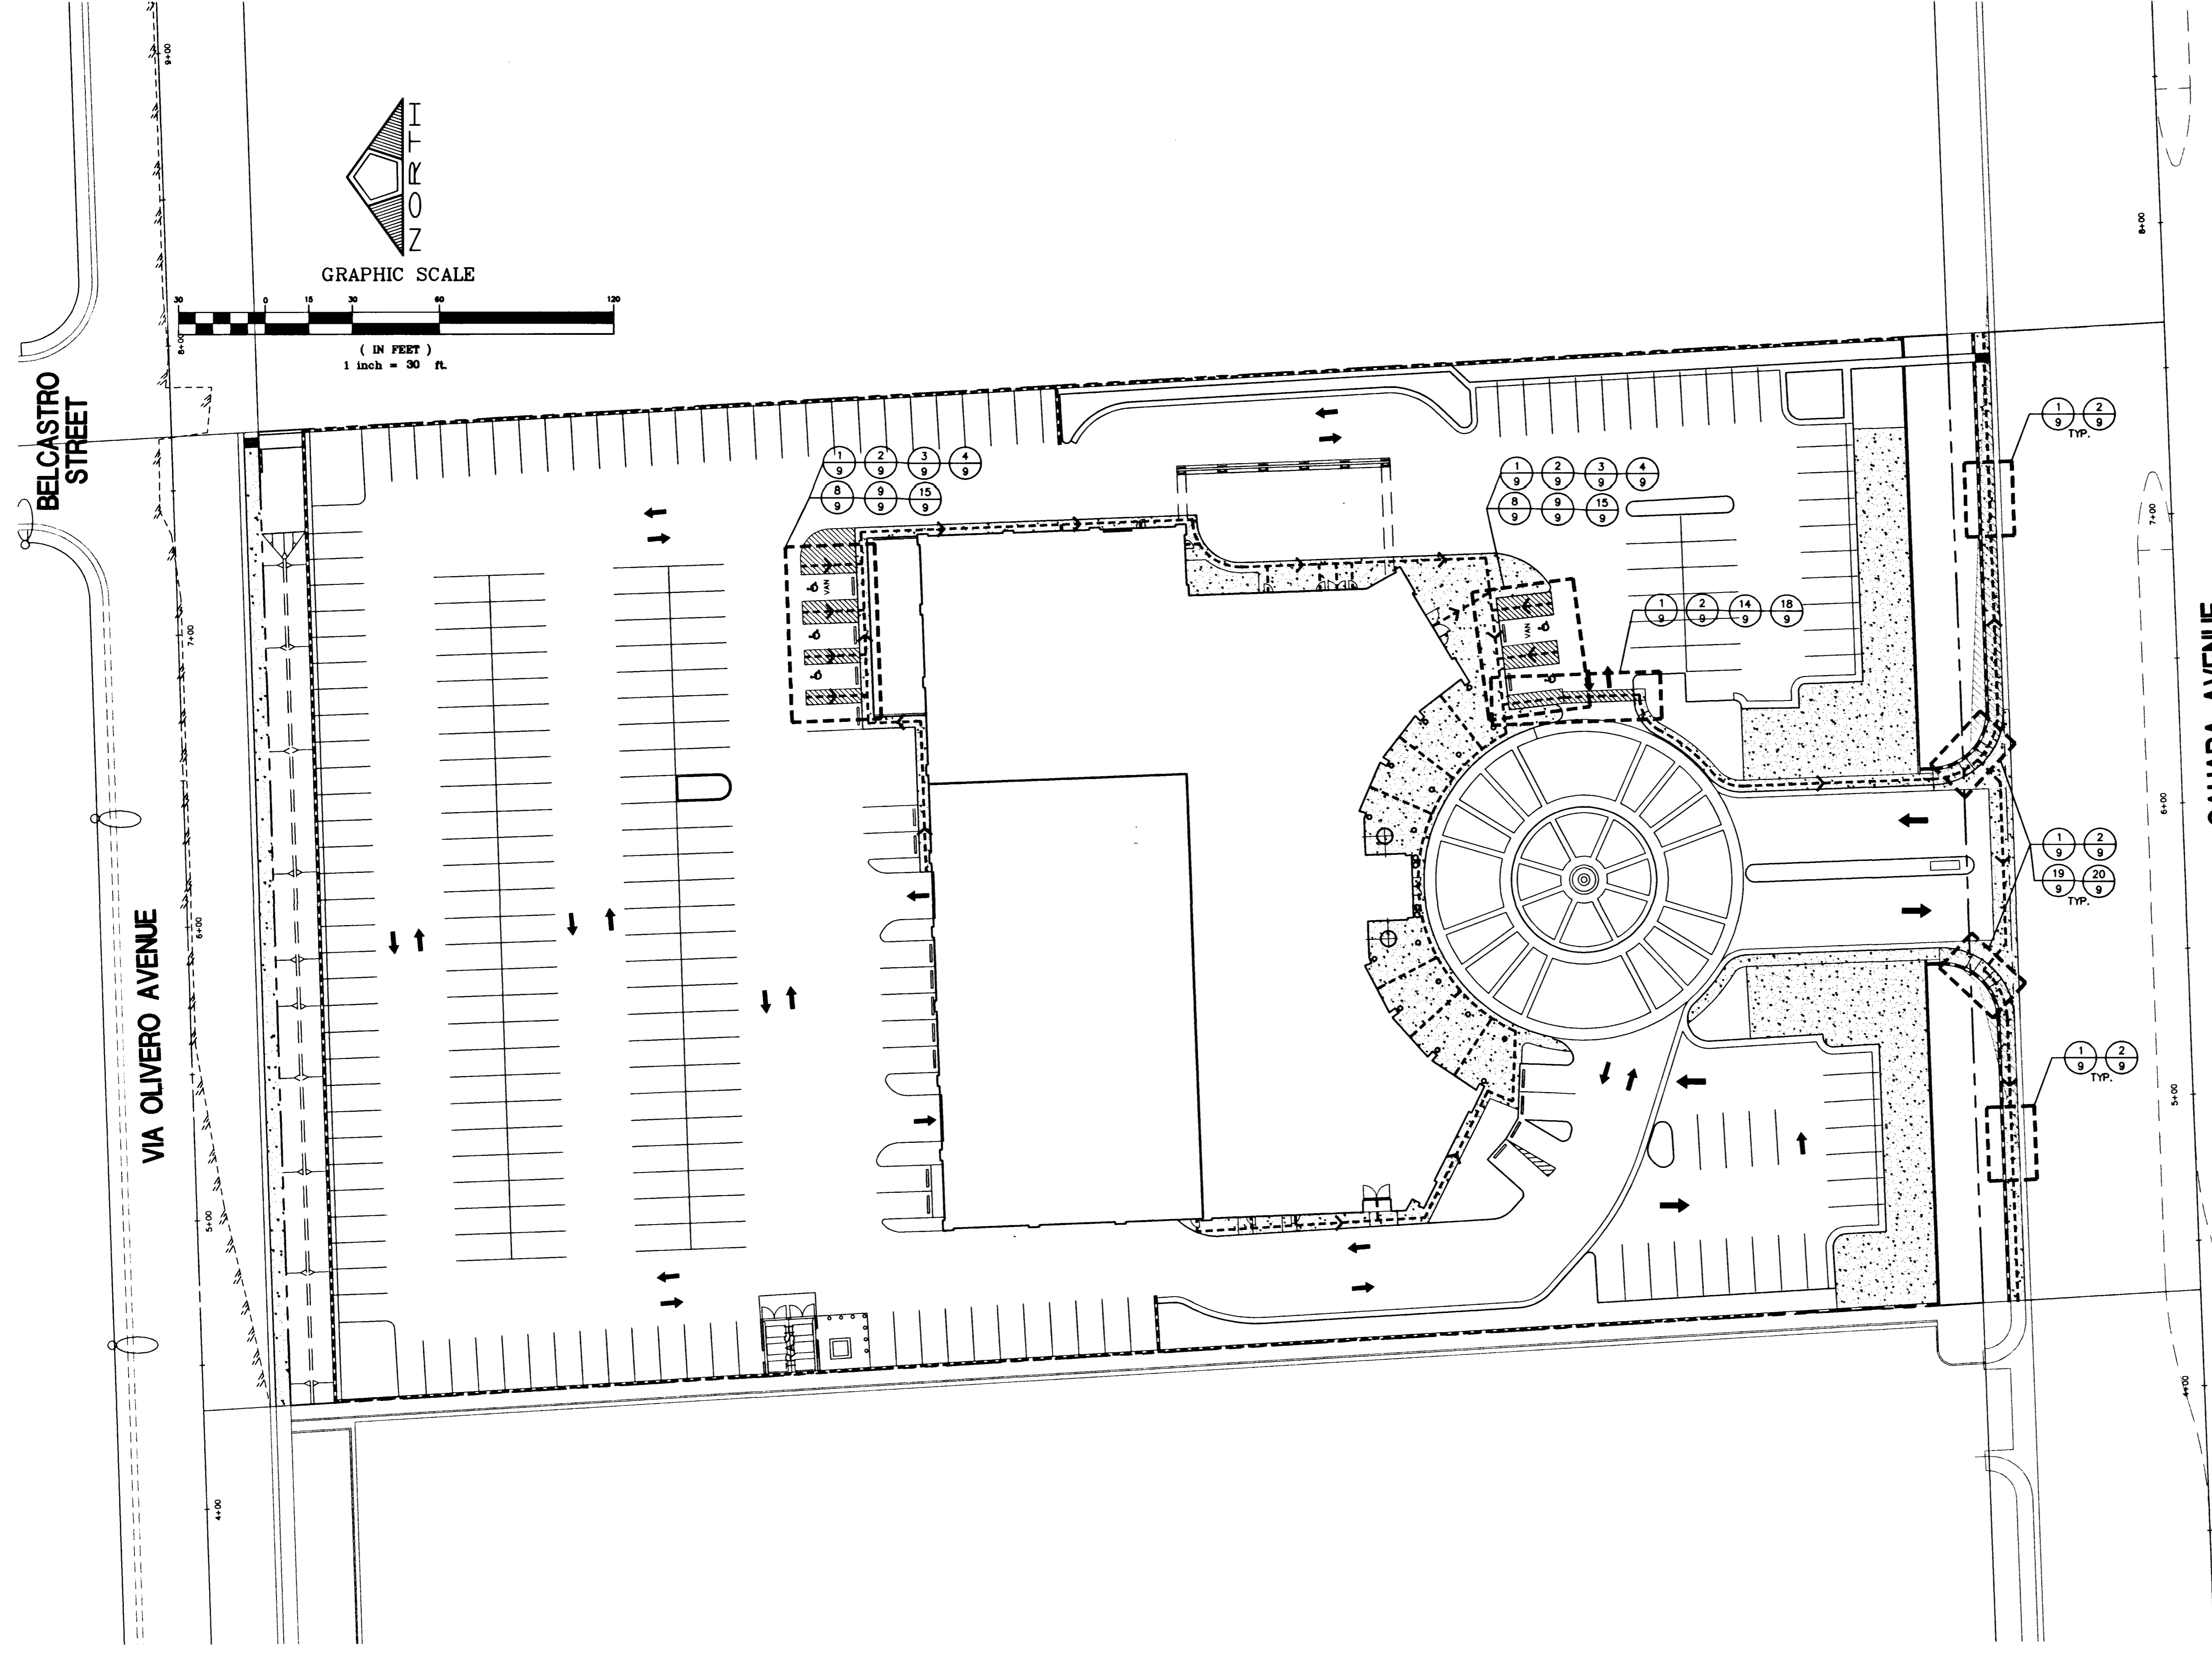

ENGINEER'S NOTES

- 1) ALL STEPS AT SIDEWALKS TO HAVE RAILINGS ON BOTH SIDES IN COMPLIANCE WITH ADA ACCESSIBILITY GUIDELINES SECTION 4.9.4.
- 2) SEE ARCHITECT'S PLANS FOR DETAILS OF HARDSCAPE AND DETAILS OF PROPOSED BUILDINGS.
- 3) CONTRACTOR RESPONSIBLE FOR ADHERING TO ALL ADA PROVISIONS.
- 4) NOTIFY ENGINEER FOR ANY DISCREPANCIES IMMEDIATELY.
- 5) ALL REQUIRED EXITS BY LOCAL BUILDING REQUIREMENTS, REQUIRED TO BE ON PATH OF TRAVEL.
- 6) CONTRACTOR TO NOTIFY ARCHITECT AND ENGINEER IMMEDIATELY IF ANY REQUIRED EXITS ARE NOT ON A PATH OF TRAVEL.

NO.	DESCRIPTION	DATE	APPRO.


SILVER STATE FORD
2121 E. SAHARA AVENUE
LAS VEGAS, NV 89104
(702) 731-2121

PENTACORE
CIVIL ENGINEERING, LAND SURVEYING AND CONSULTING
6765 WEST CHARLESTON BOULEVARD
LAS VEGAS, NEVADA 89102 (702)258-0115

PATH-OF-TRAVEL PLAN

GAUDIN'S LAS VEGAS
JAGUAR-PORSCHÉ

DATE :	MAR. 99
PK :	DPW
DRAWN BY :	
DESIGNED BY :	
CHECKED BY :	
ADA CHECKED :	0248.0010
JOB NO. :	0248.0010
SCALE :	1"=30'

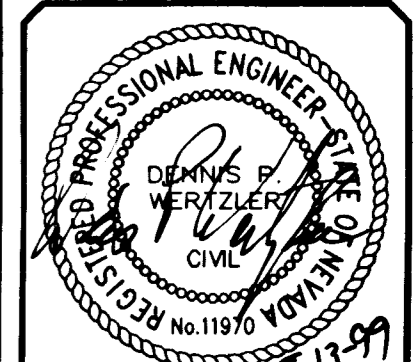

GENERAL NOTES

HANDICAP PARKING SPACES:

1. SINGLE SPACE-14' WIDE MINIMUM: WITH 9' WIDE PARKING SPACE AND 5' WIDE ACCESS AISLE.
2. DOUBLE SPACE- 23' WIDE MINIMUM: WITH TWO 9' WIDE PARKING SPACES AND 5' WIDE CENTER ACCESS AISLE.
3. SLOPE- SLOPE OF PARKING SPACES AND ACCESS AISLE SHALL NOT EXCEED 1:50.
4. ACCESS AISLES ARE CONSIDERED PART OF THE ACCESSIBLE ROUTE OF TRAVEL. EACH SPACE SHALL HAVE A SIGN SHOWING THE SYMBOL FOR ACCESSIBILITY LOCATED SO THAT A PARKED VEHICLE DOES NOT OBSCURE IT.

ACCESSIBLE ROUTE:

WIDTH - MINIMUM WIDTH OF AN ACCESSIBLE ROUTE SHALL BE 36".

SLOPE - ACCESSIBLE ROUTE SHALL BE A MAXIMUM SLOPE OF 1:20 WITH A 1:50 MAXIMUM CROSS SLOPE.

NOTE: AN ACCESSIBLE ROUTE WITH A SLOPE GREATER THAN 1:20 IS CONSIDERED A RAMP.

CURB RAMPS:

LOCATION - WHENEVER AN ACCESSIBLE PATH OF TRAVEL CROSSES A RAISED CURB.

SLOPE - MAXIMUM SLOPE OF ADJOINING SURFACES IS 1:20. SLOPE OF CURB RAMP IS A MAXIMUM OF 1:12 WITH A 1:50 MAXIMUM CROSS SLOPE.

SIDES - WHERE PEDESTRIANS WALK ACROSS RAMP, OR IF NOT PROTECTED BY HANDRAILS OR GUARDRAILS, FLARED SIDES WITH A MAXIMUM SLOPE OF 1:10 ARE NECESSARY. WHERE THERE IS NO PEDESTRIAN CROSS TRAFFIC, RETURNED CURBS MAY BE USED.

WIDTH - 36" MINIMUM WIDE, EXCLUSIVE OF FLARED SIDES.

259 TOTAL PARKING SPACES
5 REQUIRED ACCESSIBLE SPACES

REQUIRED			ACTUAL		
ACCESSIBLE 4.1.2.(5)(a)	VAN ACCESSIBLE 4.1.2.(5)(b)	TOTAL	ACCESSIBLE 4.1.2.(5)(a)	VAN ACCESSIBLE 4.1.2.(5)(b)	TOTAL
3	2	5	3	2	5

Call before you Dig.
1-800-227-2600
UNDERGROUND SERVICE (USA)

Call before you OVERHEAD.
1-702-593-6111
NEVADA POWER CORPORATION AND SAFETY SERVICES DEPARTMENT

0248.0010.DPW.DWG.PATH-OF-TRAVEL

