
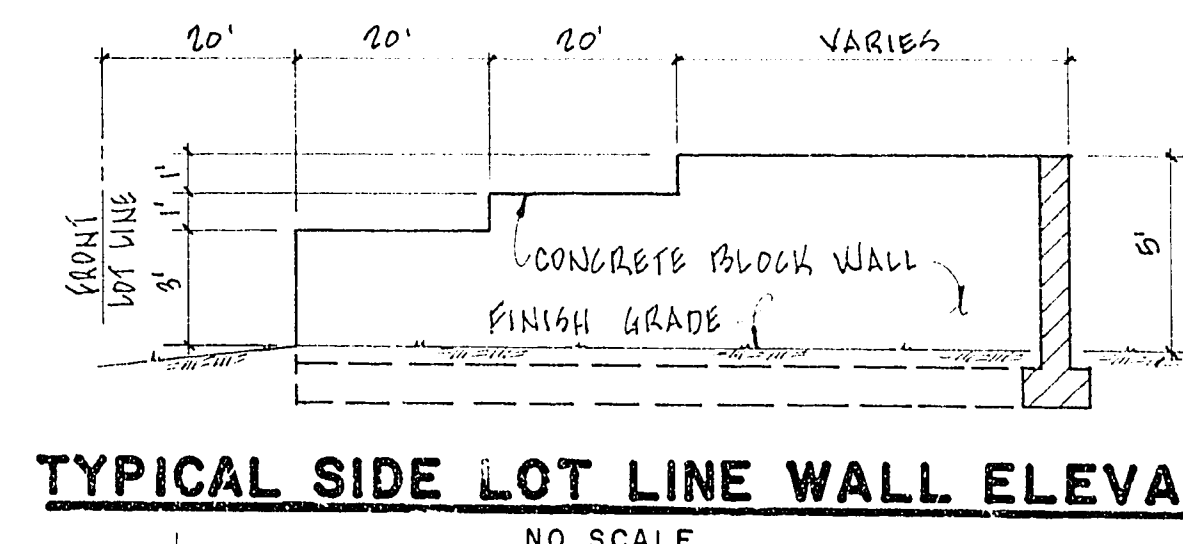
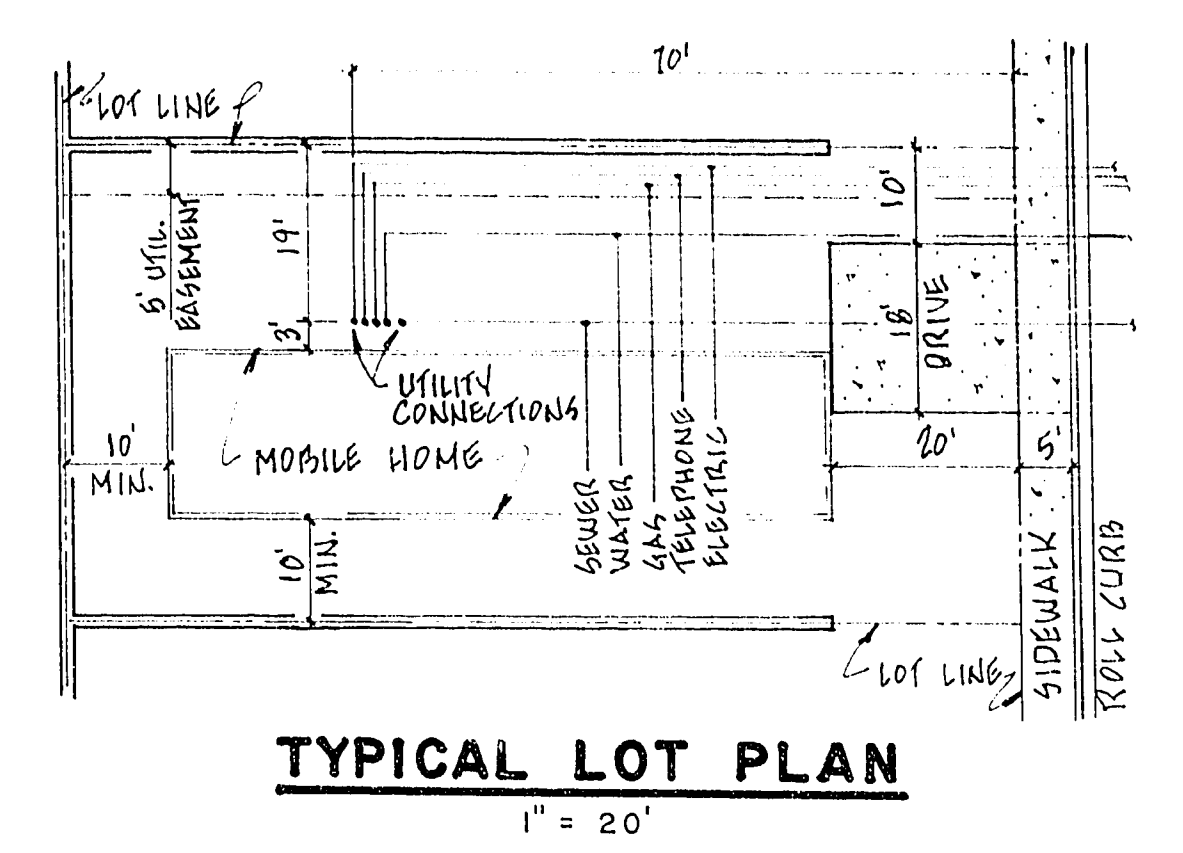
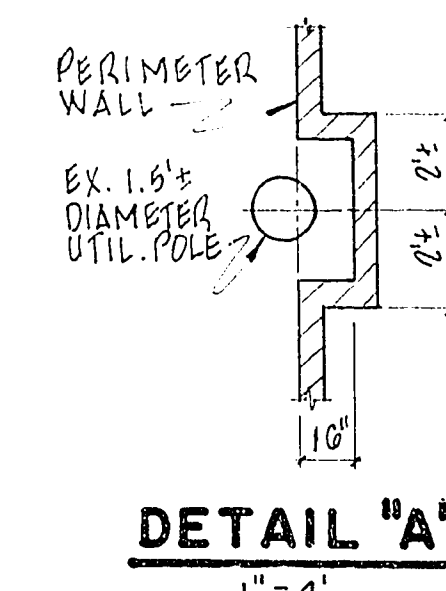


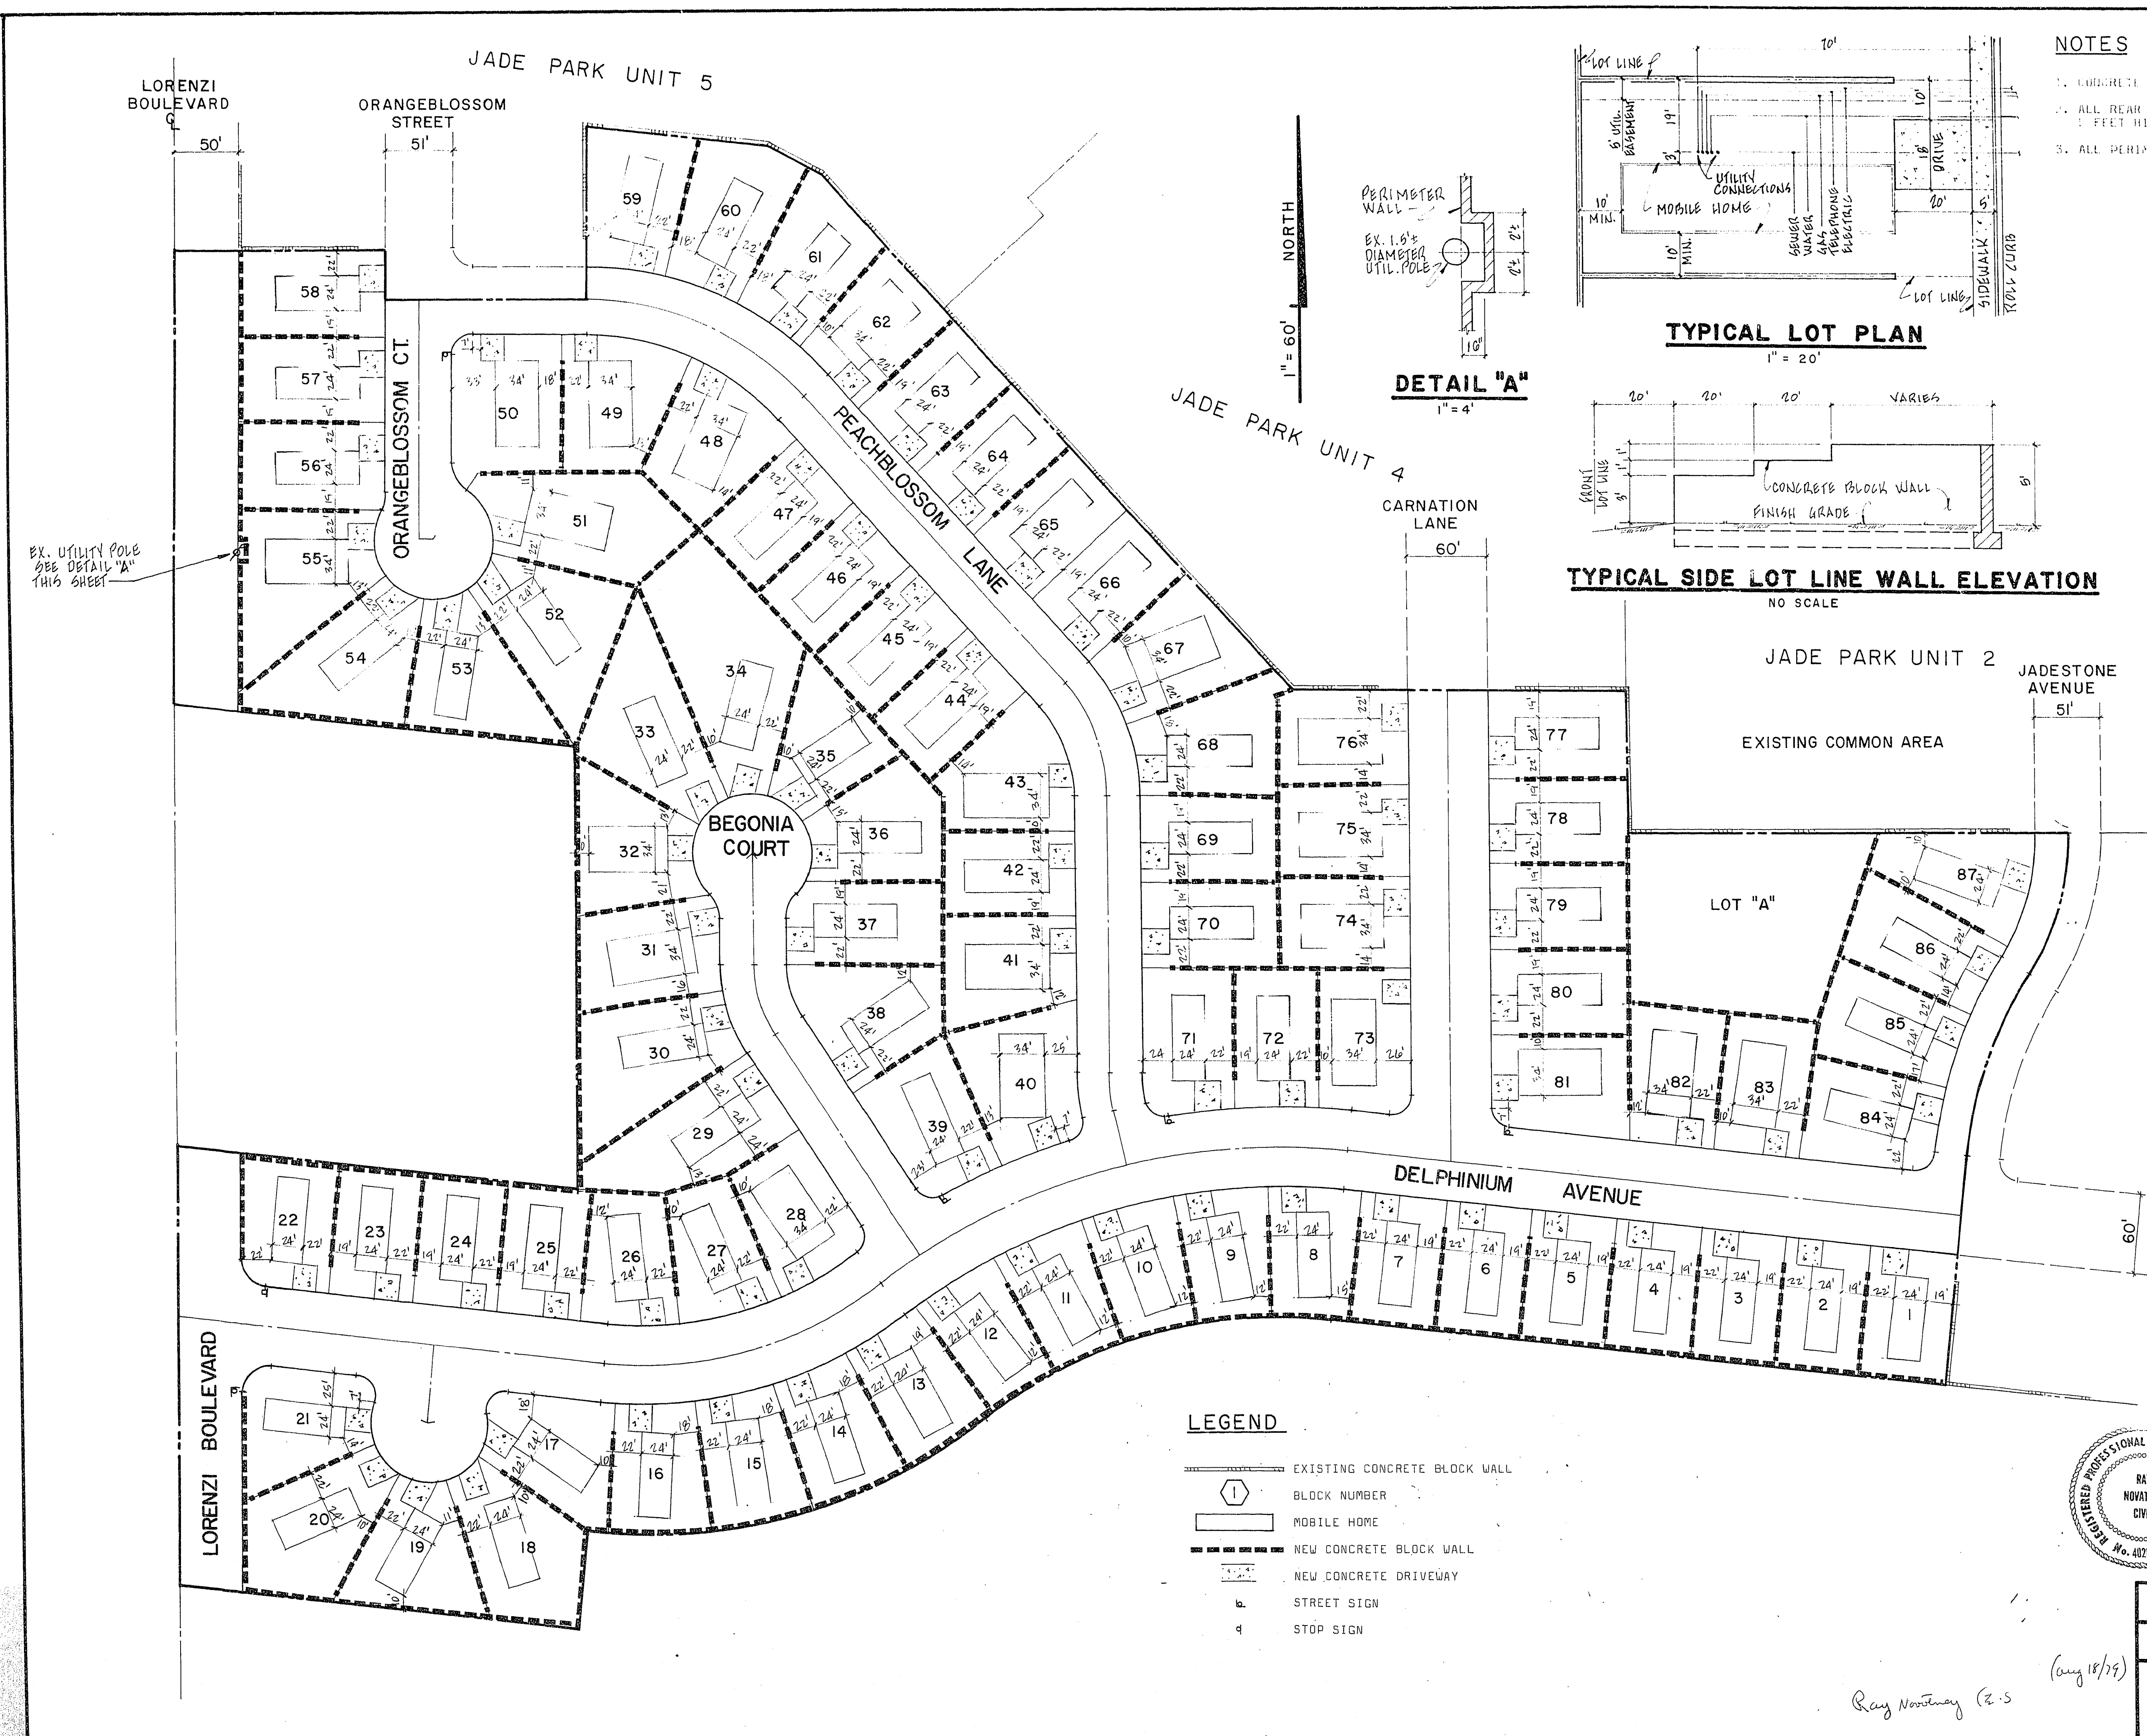

- NOTES**
- 1. CONCRETE BLOCK WALL ALTERNATE WILL BE PRECAST CONCRETE FENCE.
 - 2. ALL REAR LOT LINE WALLS, EXCEPT PERIMETER WALLS, SHALL BE 6 FEET HIGH BETWEEN INTERSECTING SIDE LOT LINE WALLS.
 - 3. ALL PERIMETER WALLS SHALL BE 6 FEET HIGH.

QUANTITIES

CONCRETE DRIVEWAY	3480	SY
STREET SIGN	5	EA
STOP SIGN	1	EA
3' HIGH C. B. WALL	1660	LF
4' HIGH C. B. WALL	1660	LF
5' HIGH C. B. WALL	3303	LF
6' HIGH C. B. WALL	2860	LF


APPROVALS

William J. Harris 12/14/77
CITY ENGINEER DATE

Ray Novatney 12/14/77
FIELD OPERATIONS ENGINEER DATE

Ray Novatney 12/14/77
QUALITY CONTROL ENGINEER DATE

- LEGEND**
- EXISTING CONCRETE BLOCK WALL
 - BLOCK NUMBER
 - MOBILE HOME
 - NEW CONCRETE BLOCK WALL
 - NEW CONCRETE DRIVEWAY
 - STREET SIGN
 - STOP SIGN

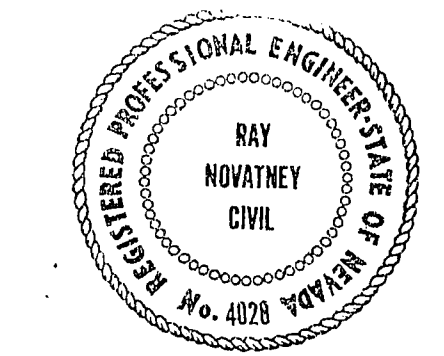

SUBMITTED

Ray Novatney 18 OCT 77
RAY NOVATNEY, RCE 4028 DATE

PLOT PLAN
JADE PARK UNIT NO. 6

TUREGUN & ASSOCIATES
CONSULTING ENGINEERS
3451 LOSEE ROAD, NORTH LAS VEGAS,
PHONE: 642-2676 NEVADA 89030

SHEET
7/12

Ray Novatney (E.S.)
(Aug 18/79)

1677.35 1078-1861.6