

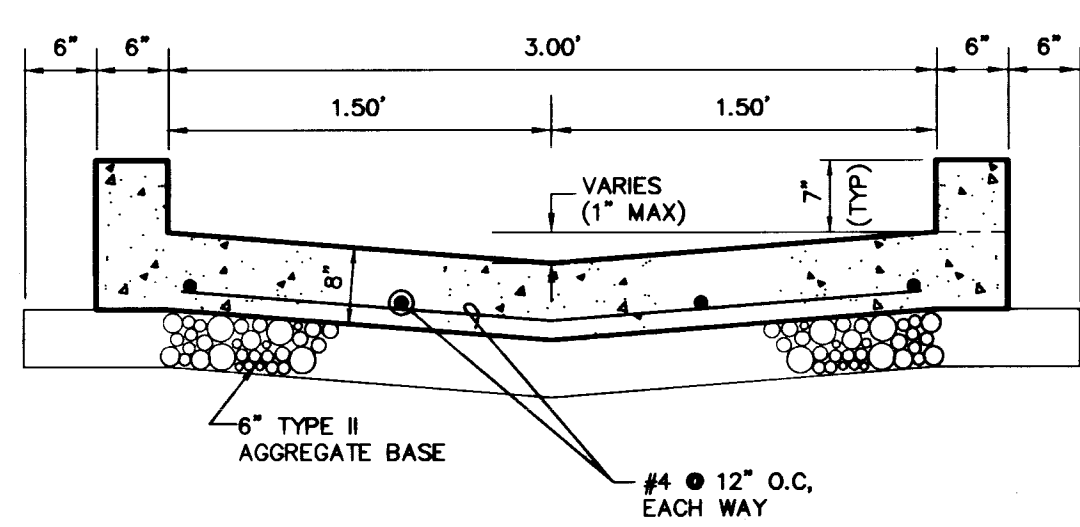
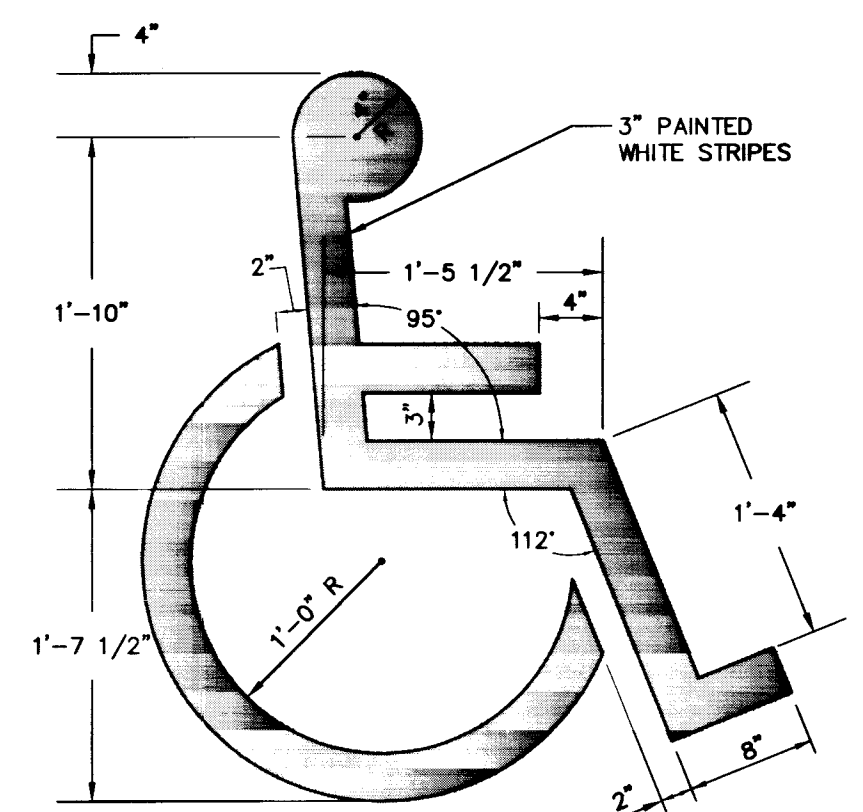
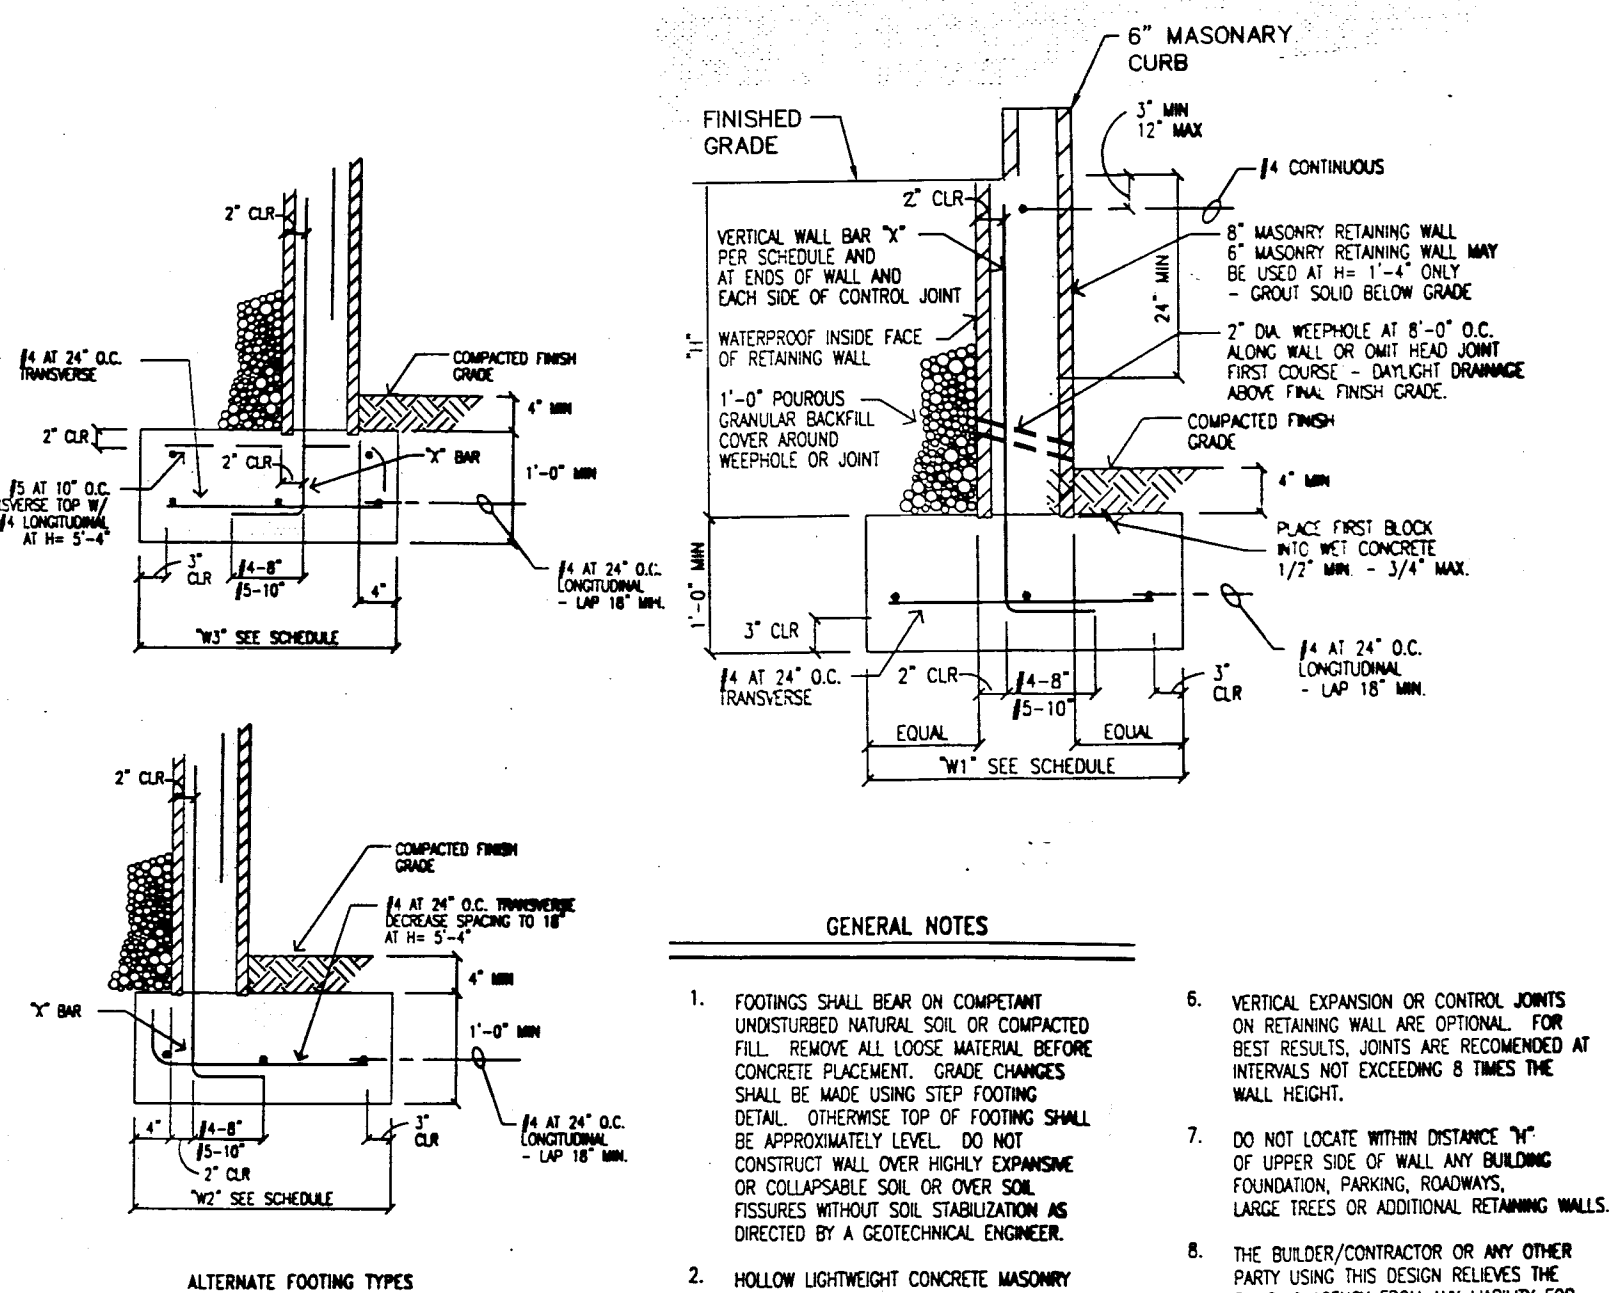
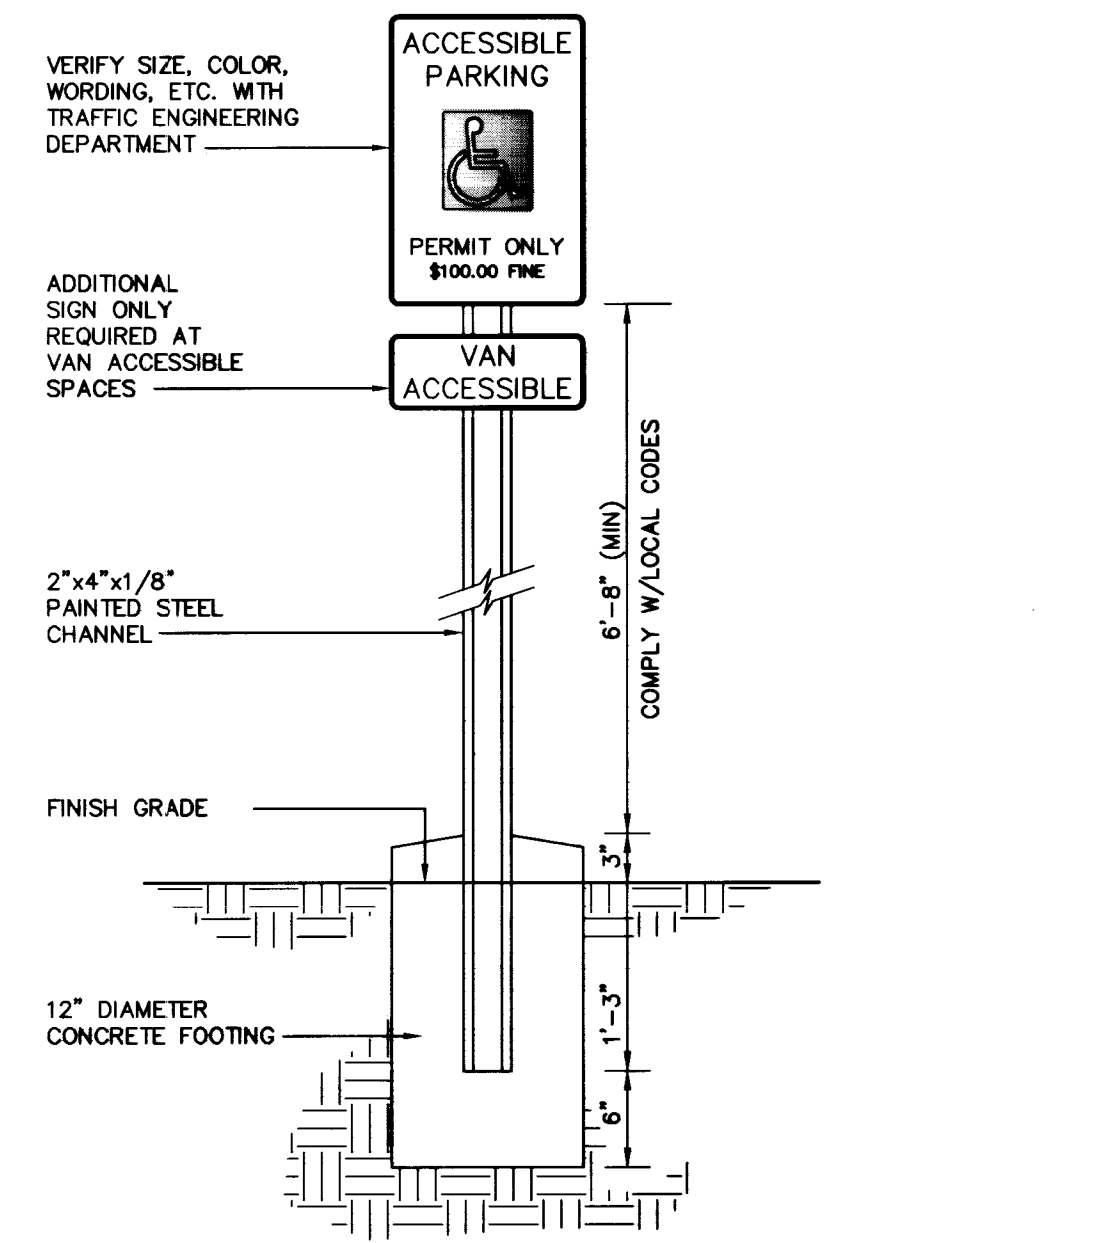


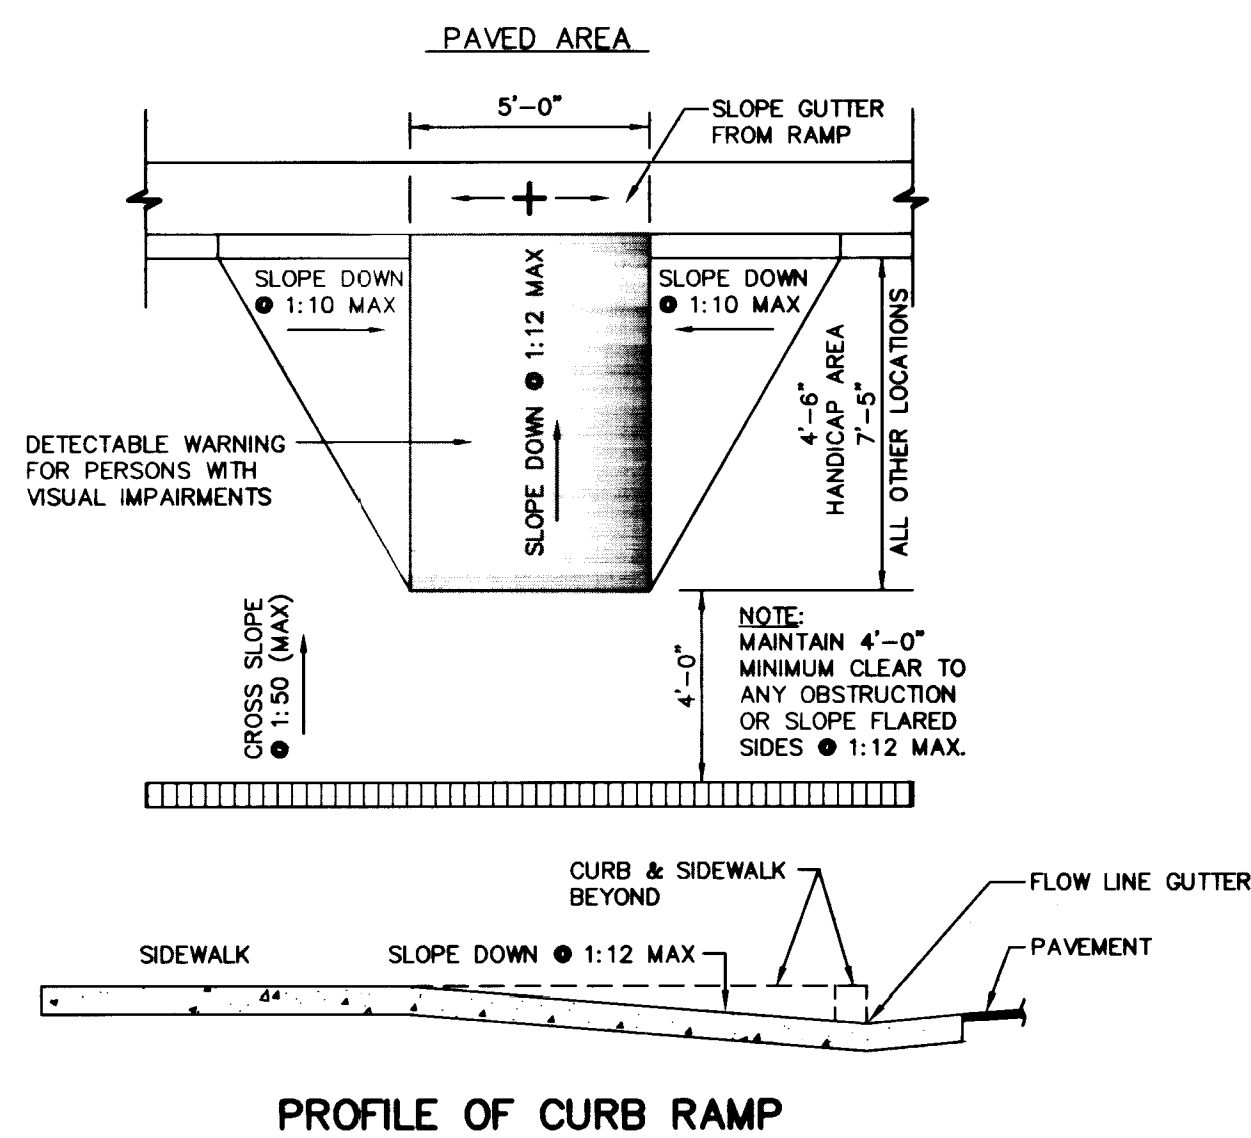

1. FOOTINGS SHALL BEAR ON COMPACTED UNDISTURBED NATURAL SOIL OR COMPACTED FILL. REMOVE ALL LOOSE MATERIAL BEFORE CONCRETE PLACEMENT. GRADE CHANGES SHALL BE MADE USING SITE SPECIFIC DETAIL. EXTENSION OF TOP OF FOOTING SHALL BE TO FINISH GRADE LEVEL. CONSTRUCT WALL OVER HEAVILY EXPANSIVE OR COLLAPSIBLE SOIL, OR OVER SOIL WITH HIGH WATER TABLE, STABILIZE SOIL AS DIRECTED BY A GEOLOGICAL ENGINEER.
2. HOLLOW LIGHTWEIGHT CONCRETE MASONRY UNITS SHALL CONFORM TO ASTM C90, GRADE IV, TYPE I, WITH 1500 PSI MINIMUM COMPRESSIVE STRENGTH.
3. STEEL REINFORCING BARS SHALL BE ASTM A615, TYPE 1, FOR #4, GRADE 60 #5 & LARGER.
4. DO NOT SLOPE REINFORCED SOIL TOWARD WALL. PROVIDE POSITIVE DRAINAGE AWAY FROM WALL ON BOTH SIDES.
5. VERTICAL EXPANSION OR CONTRACTION JOINTS SHALL BE MADE ON FENCE WALLS AT INTERVALS NOT TO EXCEED 6 TIMES THE FENCE WALL HEIGHT. JOINTS ON FENCE WALLS SHALL BE MADE BY MEANS OF PLASTER BLOCK OR CONTINUOUS REINFORCED JOINT. HORIZONTAL REINFORCING NEED NOT BE CONTINUOUS THROUGH JOINT WHERE PLASTER BLOCK IS USED.
6. VERTICAL EXPANSION OR CONTRACTION JOINTS ON RETAINING WALLS ARE OPTIONAL. FOR BEST RESULTS, JOINTS ARE RECOMMENDED AT INTERVALS NOT EXCEEDING 8 TIMES THE FENCE WALL HEIGHT.
7. DO NOT LOCATE WITHIN DISTANCE "H" OF UPPER SIDE OF WALL ANY BUILDING FOUNDATION, PARKING, ROADWAY, OR LARGE TREES OR ADDITIONAL RETAINING WALLS.
8. THE BUILDER/CONTRACTOR OR ANY OTHER PARTY USING THIS DESIGN REVEALS THE DESIGN AGENT HAS NO LIABILITY FOR ALL INJURIES, CLAIMS, EXPENSES OR DAMAGES RESULTING FROM CONSTRUCTION OF THIS DESIGN.
9. LOCATIONS REQUIRING DESIGN EXCEEDING LIMITATIONS OF THIS STANDARD SHALL BE PREPARED BY A NEVADA REGISTERED PROFESSIONAL ENGINEER AND APPROVED BY THE BUILDING AGENCY FOR A SPECIFIC LOCATION.
10. INSPECTION OF CONSTRUCTION SHALL BE SUPERVISED ACCORDING TO SPECIFICATIONS OWN BY BUILDING DEPARTMENT OFFICIALS.

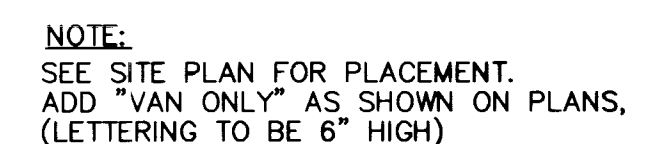

Avoid cutting underground utility lines. It's costly.

**Call
before you
Dig.**

1-800-227-2600

FILENAME: C106DET.DWG
DISPLAY: NONE
XREFS: NONE



[illegible]

POGEMEYER DESIGN GROUP
ENGINEERS PLANNERS SURVEYORS
 2601 NORTH TENAYA WAY LAS VEGAS, NEVADA 89128 (702) 255-8100

MISCELLANEOUS DETAILS

JOB NUMBER	6480001
DESIGNED BY	RP
DRAWN BY	DRF
CHECKED BY	CLM
DATE	01.02.97
SHEET NUMBER	
C1.06	
6 of 6	

107-V2682




SECTION 10-11



DETAIL 10B

ON-SET CURB RAMP



DETAIL 10C



DETAIL 10D

HANDICAP STOPS




SECTION 10-12



SECTION 10-13

AC PAVEMENT SECTIONS



HANDICAP PARKING LAYOUT



CONCRETE U-GUTTER



CONCRETE VALLEY GUTTER W/GRASS

ITEM	QTY	UNIT	PRICE
1.00	1.00	1.00	1.00
2.00	2.00	2.00	2.00
3.00	3.00	3.00	3.00
4.00	4.00	4.00	4.00
5.00	5.00	5.00	5.00
6.00	6.00	6.00	6.00
7.00	7.00	7.00	7.00
8.00	8.00	8.00	8.00
9.00	9.00	9.00	9.00
10.00	10.00	10.00	10.00

ITEM	QTY	UNIT	PRICE
1.00	1.00	1.00	1.00
2.00	2.00	2.00	2.00
3.00	3.00	3.00	3.00
4.00	4.00	4.00	4.00
5.00	5.00	5.00	5.00
6.00	6.00	6.00	6.00
7.00	7.00	7.00	7.00
8.00	8.00	8.00	8.00
9.00	9.00	9.00	9.00
10.00	10.00	10.00	10.00

ITEM	QTY	UNIT	PRICE
1.00	1.00	1.00	1.00
2.00	2.00	2.00	2.00
3.00	3.00	3.00	3.00
4.00	4.00	4.00	4.00
5.00	5.00	5.00	5.00
6.00	6.00	6.00	6.00
7.00	7.00	7.00	7.00
8.00	8.00	8.00	8.00
9.00	9.00	9.00	9.00
10.00	10.00	10.00	10.00

ITEM	QTY	UNIT	PRICE
1.00	1.00	1.00	1.00
2.00	2.00	2.00	2.00
3.00	3.00	3.00	3.00
4.00	4.00	4.00	4.00
5.00	5.00	5.00	5.00
6.00	6.00	6.00	6.00
7.00	7.00	7.00	7.00
8.00	8.00	8.00	8.00
9.00	9.00	9.00	9.00
10.00	10.00	10.00	10.00

ITEM	QTY	UNIT	PRICE
1.00	1.00	1.00	1.00
2.00	2.00	2.00	2.00
3.00	3.00	3.00	3.00
4.00	4.00	4.00	4.00
5.00	5.00	5.00	5.00
6.00	6.00	6.00	6.00
7.00	7.00	7.00	7.00
8.00	8.00	8.00	8.00
9.00	9.00	9.00	9.00
10.00	10.00	10.00	10.00

ITEM	QTY	UNIT	PRICE
1.00	1.00	1.00	1.00
2.00	2.00	2.00	2.00
3.00	3.00	3.00	3.00
4.00	4.00	4.00	4.00
5.00	5.00	5.00	5.00
6.00	6.00	6.00	6.00
7.00	7.00	7.00	7.00
8.00	8.00	8.00	8.00
9.00	9.00	9.00	9.00
10.00	10.00	10.00	10.00

ITEM	QTY	UNIT	PRICE
1.00	1.00	1.00	1.00
2.00	2.00	2.00	2.00
3.00	3.00	3.00	3.00
4.00	4.00	4.00	4.00
5.00	5.00	5.00	5.00
6.00	6.00	6.00	6.00
7.00	7.00	7.00	7.00
8.00	8.00	8.00	8.00
9.00	9.00	9.00	9.00
10.00	10.00	10.00	10.00

RETAINING WALL

POGGIEMER DESIGN GROUP
PEAK OFFICE BUILDING
PEAK DRIVE
LAS VEGAS, NEVADA

Call
D/A

C108