

1. ESTIMATED EARTHWORK QUANTITIES TO ROUGH GRADE SITE EXCLUDING SHRINKAGE AND SUBSIDENCE ARE AS FOLLOWS:  
1000 CY FILL  
0 CY CUT  
1000 CY FILL
2. CONTRACTOR SHALL VERIFY ALL EARTHWORK CALCULATIONS AND BASE HIS BIDS ON HIS OWN CALCULATIONS.



|                         |      |
|-------------------------|------|
| 1" WATER METER          | 1 EA |
| 8"W                     | 376  |
| FH ASSEMBLY<br>COMPLETE | 2 EA |
| 8"SS                    | 133  |
| 4" SS LATERAL           | 70   |
| MH                      | 1 EA |

NUMBER OF STORIES \_\_\_\_\_ 2

TODD AND HEATHER ROGERS  
4342 MAMMOTH CREEK DRIVE  
LAS VEGAS, NEVADA 89147  
PHONE 702-248-0295

NORTH 88°10'00" WEST  
BEING THE BEARING OF THE SOUTH LINE OF THE  
NORTHEAST QUARTER OF SECTION 4, TOWNSHIP 20 SOUTH.,  
RANGE 60 EAST., M.D.B.& M., AS SHOWN ON RECORD MAP  
OF SURVEY FILE 27. PAGE 66. CLARK COUNTY, NEVADA RECORDS



CITY OF LAS VEGAS  
BENCH MARK # 1LV003NW6  
PIN & PLATE IN TOP "A" CURB NORTHWEST  
CORNER CRIG ROAD & CIMARRON ROAD  
NEAR THE 1/2 DELTA.  
METERS = 722.066  
U.S. SURVEY FEET = 2368.88 (NAVD88)

LOT 1 OF FILE 18, PAGE 82 OF PARCEL MAPS  
APN:138-04-603-014

FIRM PANEL 32003C2135 DATED SEPTEMBER 27, 2002.  
ENTIRE AREA WITHIN FEMA ZONE "X"

LAS VEGAS VALLEY WATER DISTRICT  
PROJECT # H-111344

PANEL 2135 OF 4090  
MAP NUMBER 32003C2135E REVISED SEPTEMBER 27, 2002  
ENTIRE PROJECT IS WITHIN ZONE "X"

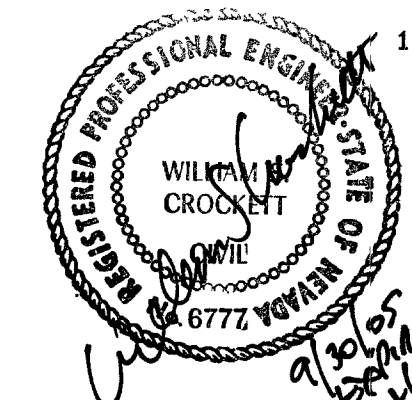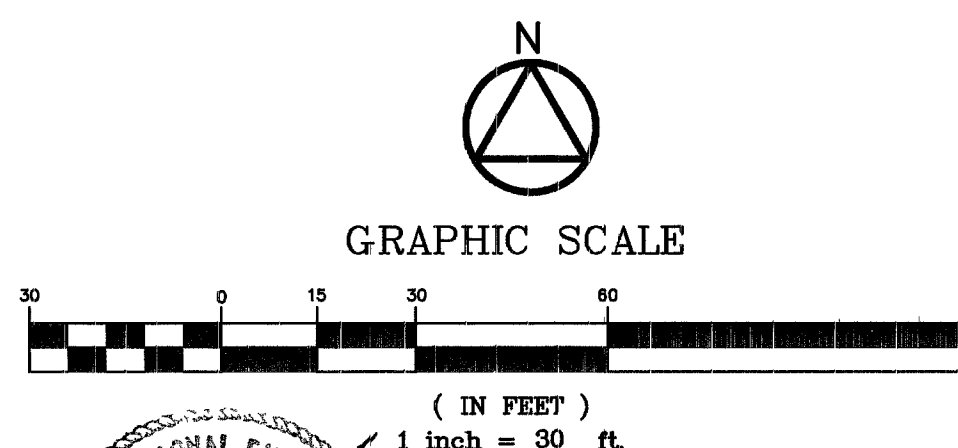

|                                                                                                                                                          |                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>AVOID CUTTING UNDERGROUND UTILITY LINES. IT'S COSTLY.</p> <p>Call before you Dig—</p> <p>1-800-227-2600</p> <p>UNDERGROUND SERVICE ALERT (U.S.A.)</p> | <p>AVOID OVERHEAD POWER LINE CONTACT</p> <p>Call before you OVERHEAD</p> <p>1-702-227-2929</p> <p>NEVADA POWER ENVIRONMENT AND SAFETY SERVICES DEPARTMENT</p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|

[illegible]

DELTA ENGINEERING ASSUMES NO RESPONSIBILITY FOR EXISTING UTILITY LOCATION AND ELEVATIONS. THE UTILITIES SHOWN ON THIS DRAWING HAVE BEEN PLOTTED FROM THE BEST AVAILABLE INFORMATION. IT IS, HOWEVER, THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY THE LOCATION AND ELEVATION OF ALL UTILITIES PRIOR TO THE COMMENCEMENT OF ANY CONSTRUCTION. CONTRACTOR TO FIELD VERIFY ALL EXISTING SITE CONDITIONS PRIOR TO CONSTRUCTION. IF A CONFLICT EXISTS BETWEEN WHAT IS SHOWN ON THESE DRAWINGS AND WHAT EXISTS IN THE FIELD, THE CONTRACTOR IS TO NOTIFY THE ARCHITECT OR ENGINEER IMMEDIATELY.

TITLE

SITE PLAN AND  
UTILITY PLAN

**SHEET TITLE**

|           |      |
|-----------|------|
| APP'D. BY | DATE |
|-----------|------|

[illegible]

DESCRIPTION

DATE

**JOB**

DES

DRA

SHE

1

CLV

HTE: 05-23250