


EXIST. MH CCSD #FFH
RIM = 55.08
IE = 50.59

PUBLIC QUANTITIES:		
DESCRIPTION	AMOUNT	UNIT
8" Ø DIP CL 50 W/POLY WRAP	466	LF
STANDARD MANHOLES	3	EA
SHORTY MANHOLES	1	EA
8" X 6" HYE	1	EA


DO NOT BEGIN CONSTRUCTION UNTIL
THE INVERT AT MH#SQE #1 HAS BEEN
FIELD VERIFIED.

CLARK COUNTY SANITATION DISTRICT GENERAL NOTES:

- 1) ALL CONSTRUCTION AND MATERIALS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE DESIGN AND CONSTRUCTION STANDARDS OF THE CLARK COUNTY SANITATION DISTRICT AND THE UNIFORM STANDARD SPECIFICATION FOR PUBLIC WORKS' CONSTRUCTION OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA, NEVADA 1986, AS AMENDED. IN ALL CASES, THE DISTRICT'S CRITERIA SHALL SUPERSEDE THE UNIFORM STANDARD SPECIFICATIONS. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO BE AWARE OF THE CONTENTS OF THE ABOVE SPECIFICATION BOOK.
- 2) CLARK COUNTY SANITATION DISTRICT'S STANDARD DRAWINGS SHALL APPLY TO ALL CONSTRUCTION.
- 3) SEWER MAINS ONLY TO BE LAID IN SEWER TRENCHES.
- 4) IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO PERFORM CONSTRUCTION AS PER PLANS. ANY ADDITIONS, DELETIONS, OR CHANGES SHALL FIRST MEET WITH THE APPROVAL OF THE CLARK COUNTY SANITATION DISTRICT.
- 5) IF A LATERAL IS UNDER A DRIVEWAY, CONCRETE SLAB, OR A.C. AREA, A CLEANDOUT SHALL BE INSTALLED AND RAISED TO GRADE WITH A SLOTTED BRASS CAP OR WITHIN A WATER METER BOX WHICH HAS A METAL COVER MARKED "SEW. C.O." THIS INSTALLATION SHALL BE IN ACCORDANCE WITH STANDARD DRAWING SD-12. ALL COMPONENTS OF CLEANDOUTS SHALL BE THE SAME SIZE AS THE LATERAL.

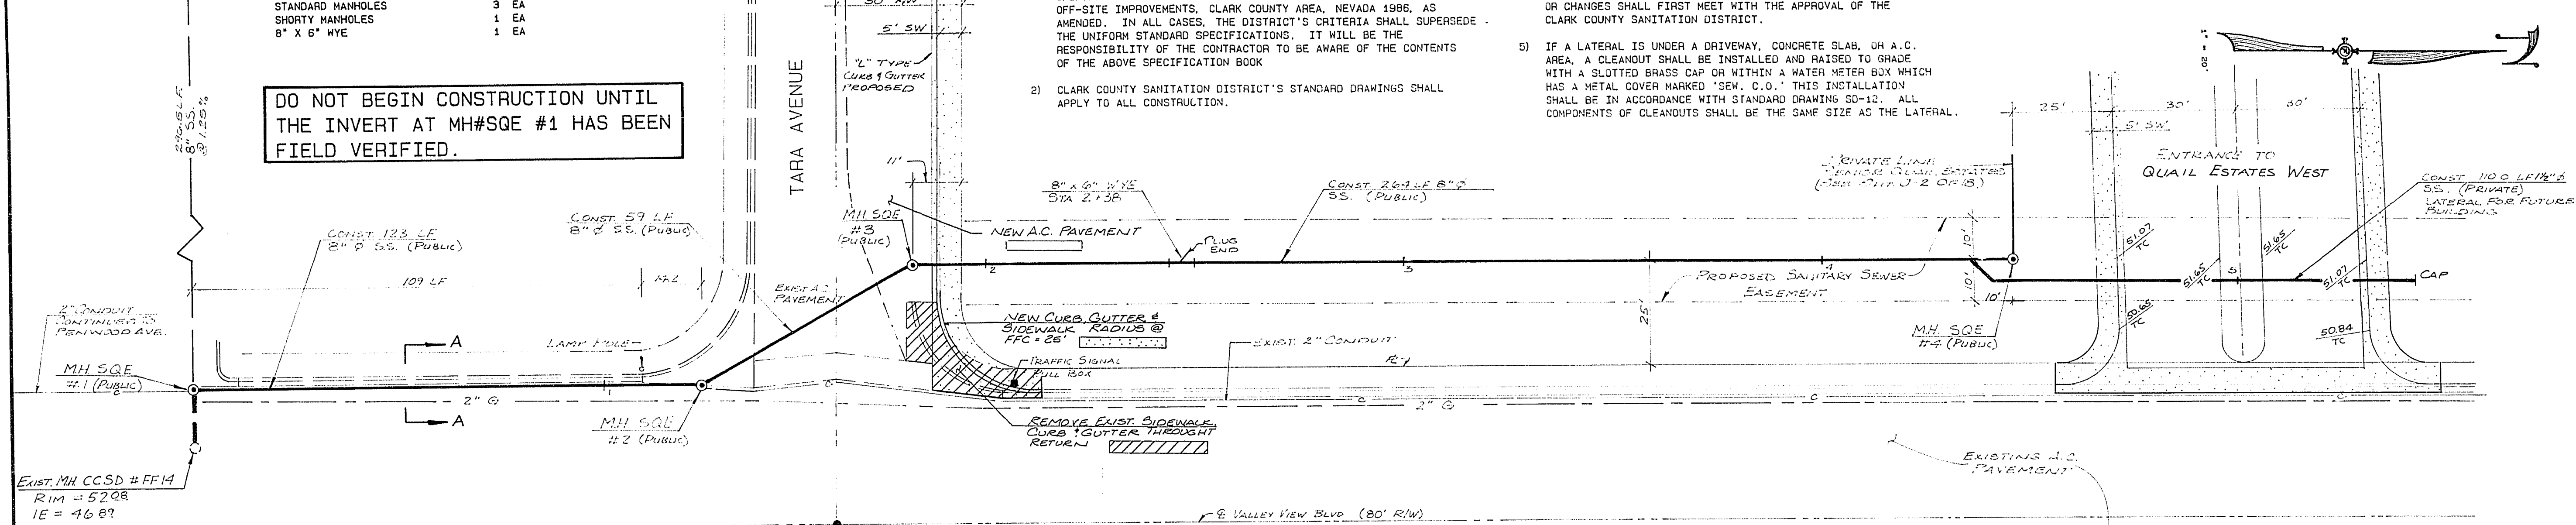


VALLEY VIEW BOULEVARD

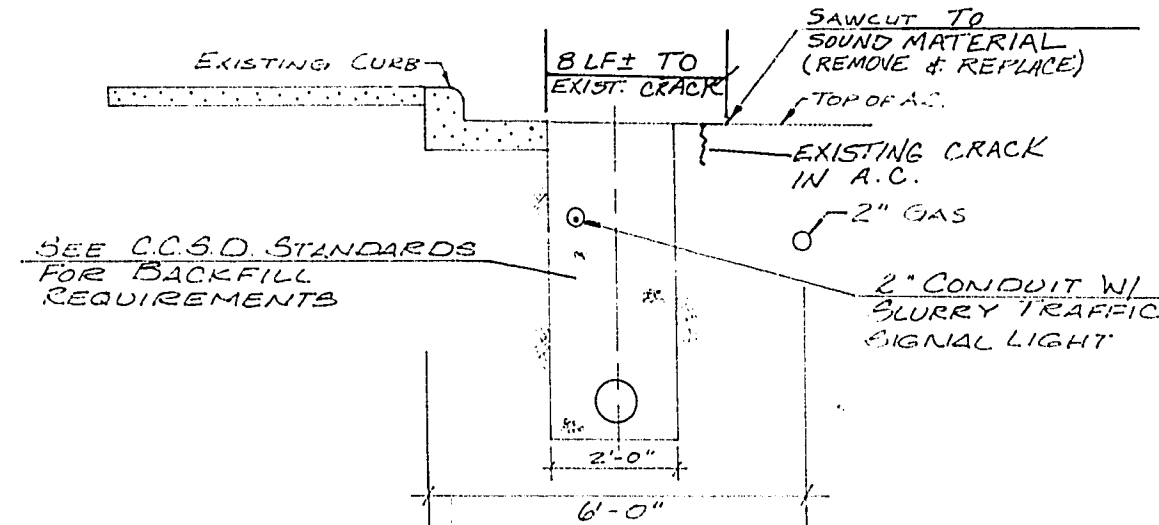


SECTION A-A
SCALE 1" = 3'-0"

NOTE:

- 1) BEFORE CONSTRUCTION BEGINS THE TRAFFIC SIGNAL WIRE SHALL BE DISCONNECTED AT PENWOOD AVE. AND THE WIRE REMOVED FROM THE CONDUIT TO THE PULL BOX AT THE NORTHWEST CORNER OF TARA AVE. AND VALLEY VIEW.
- 2) THE TWO INCH CONDUIT SHALL BE REMOVED AND REPLACED FROM STATION 0+00 TO 1+23.
- 3) THE TRAFFIC WIRE SHALL BE PROTECTED FROM ANY DAMAGE.
- 4) THIS WORK SHALL BE CLEARED WITH C.L.V. TRAFFIC ENGINEER AND/OR N.D.O.T. BEFORE ANY WORK IS STARTED.

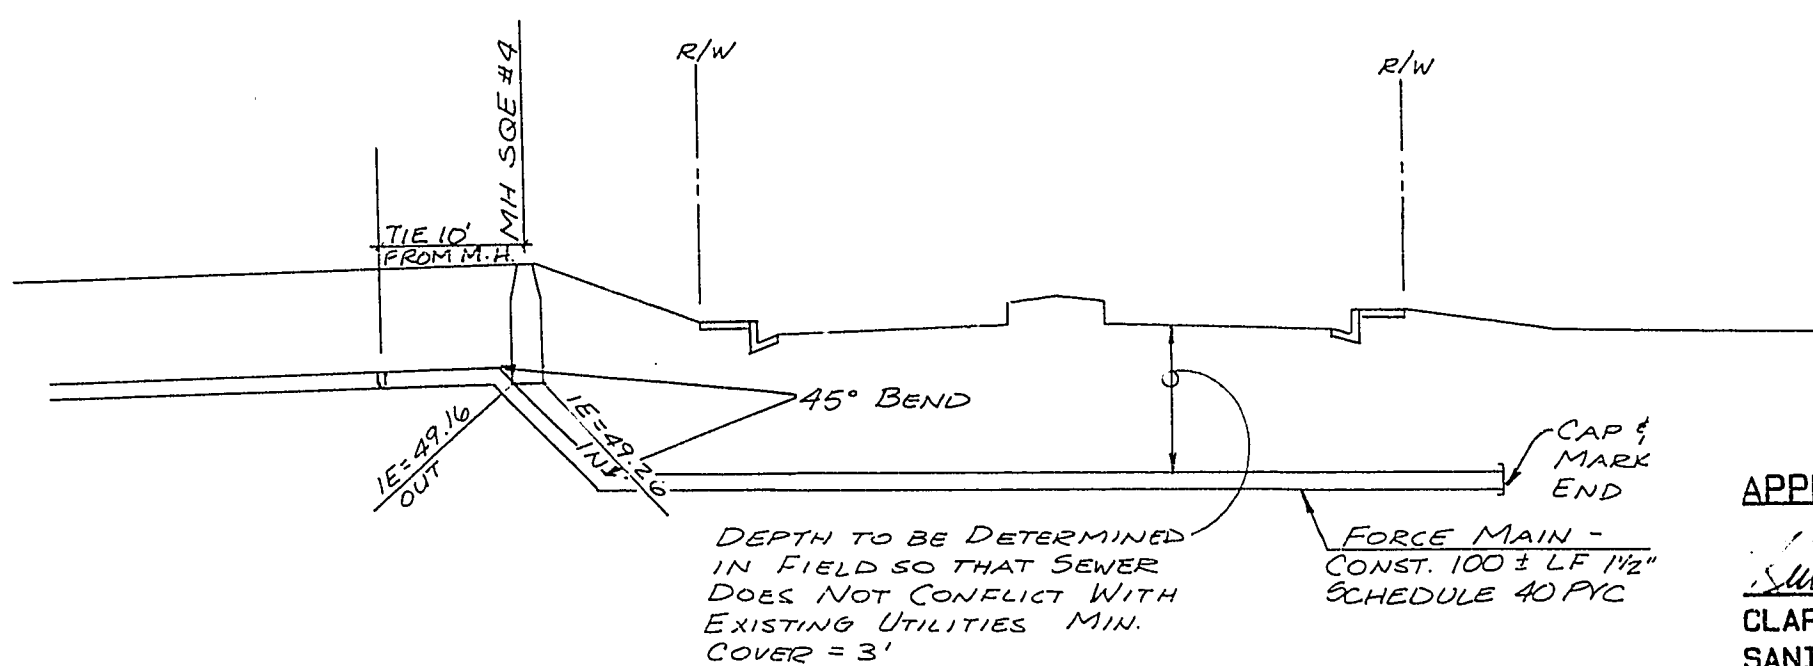

SEWER CROSSING @ ENTRANCE TO
QUAIL ESTATES WEST
(N.T.D.)

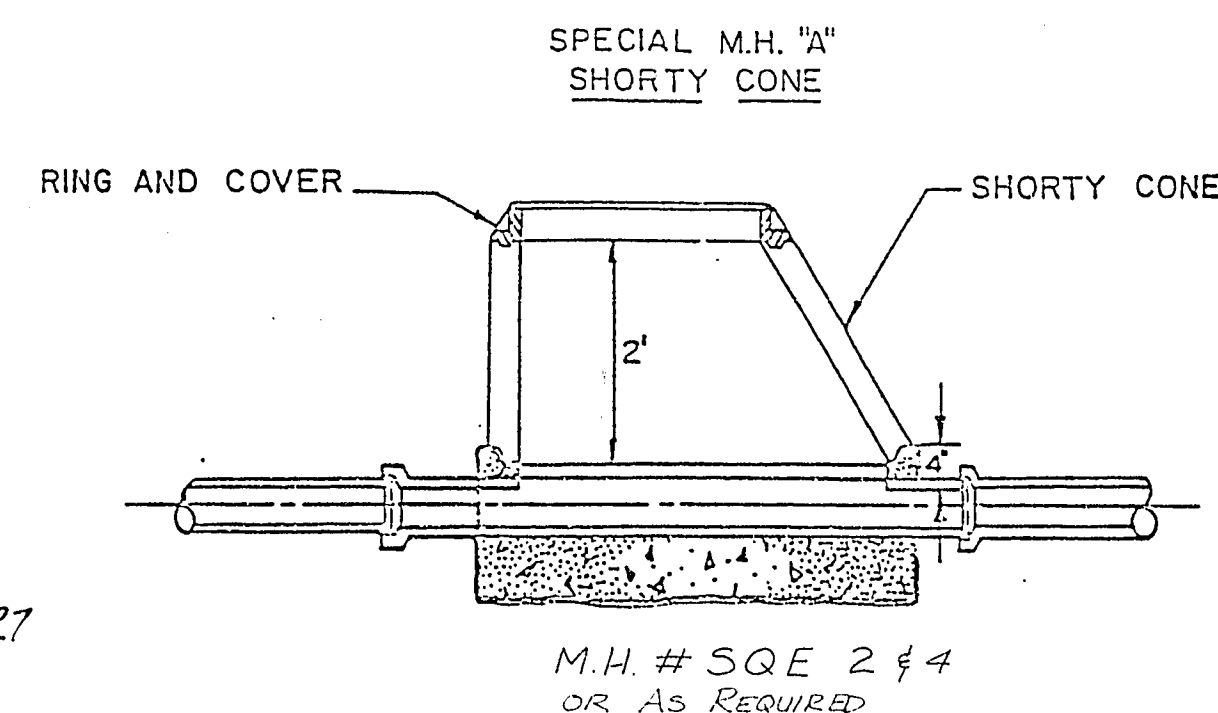


M.H. # SQE 2 & 4
OR AS REQUIRED


APPROVAL

Suit L. [Signature]
CLARK COUNTY
SANITATION DISTRICT

10/16/87
DATE

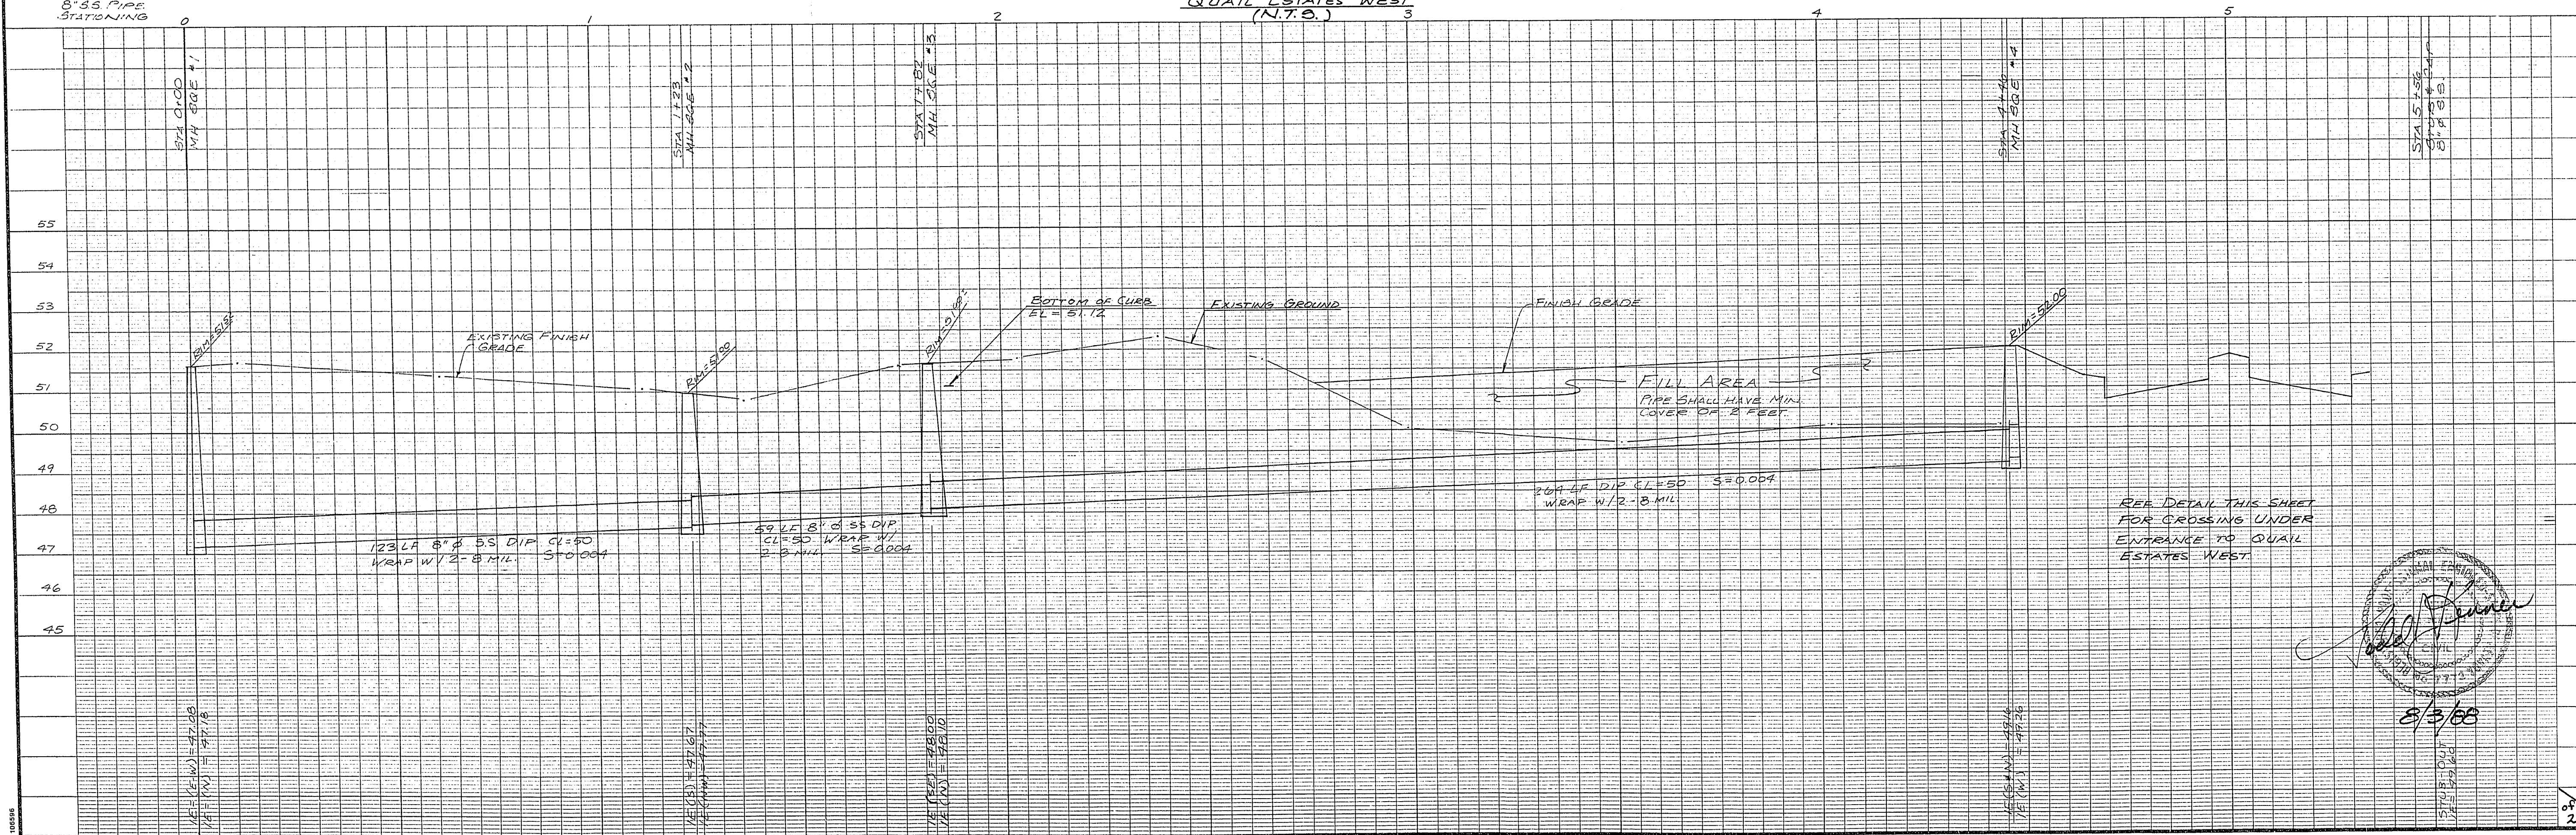

SHEET D-4 OF 19		SUMMIT ENGINEERING CORPORATION		CONSULTING ENGINEERS AND SURVEYORS	
SCALE: HORIZ 1" = 20' VERT 1" = 2'		JOB NO. 7035		DRAWING NO.	
QUAIL ESTATES WEST		OFFSITE SEWER		NEVADA	
CLARK COUNTY		LAS VEGAS			
DESIGNED BY: RLA	DATE: 2/3/88	DESCRIPTION: 400' TARA-VALLEY VIEW INTERSECTION	BY: APPD	DATE: 3-9-88	REVISION: FORCE MAIN DETAIL
DRAWN BY: LR/TS	DATE: 10/16/87	DESCRIPTION: 400' TARA-VALLEY VIEW INTERSECTION	BY: APPD	DATE: 3-9-88	REVISION: FORCE MAIN DETAIL
CHECKED BY:	DATE:	DESCRIPTION:	BY:	DATE:	REVISION:

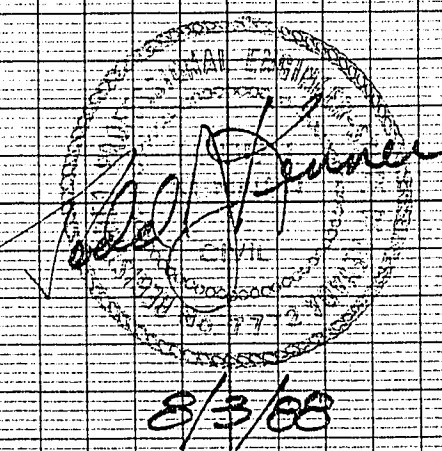

13 903 3074-4009-12