



HOWARD WARDEN ELEMENTARY SCHOOL

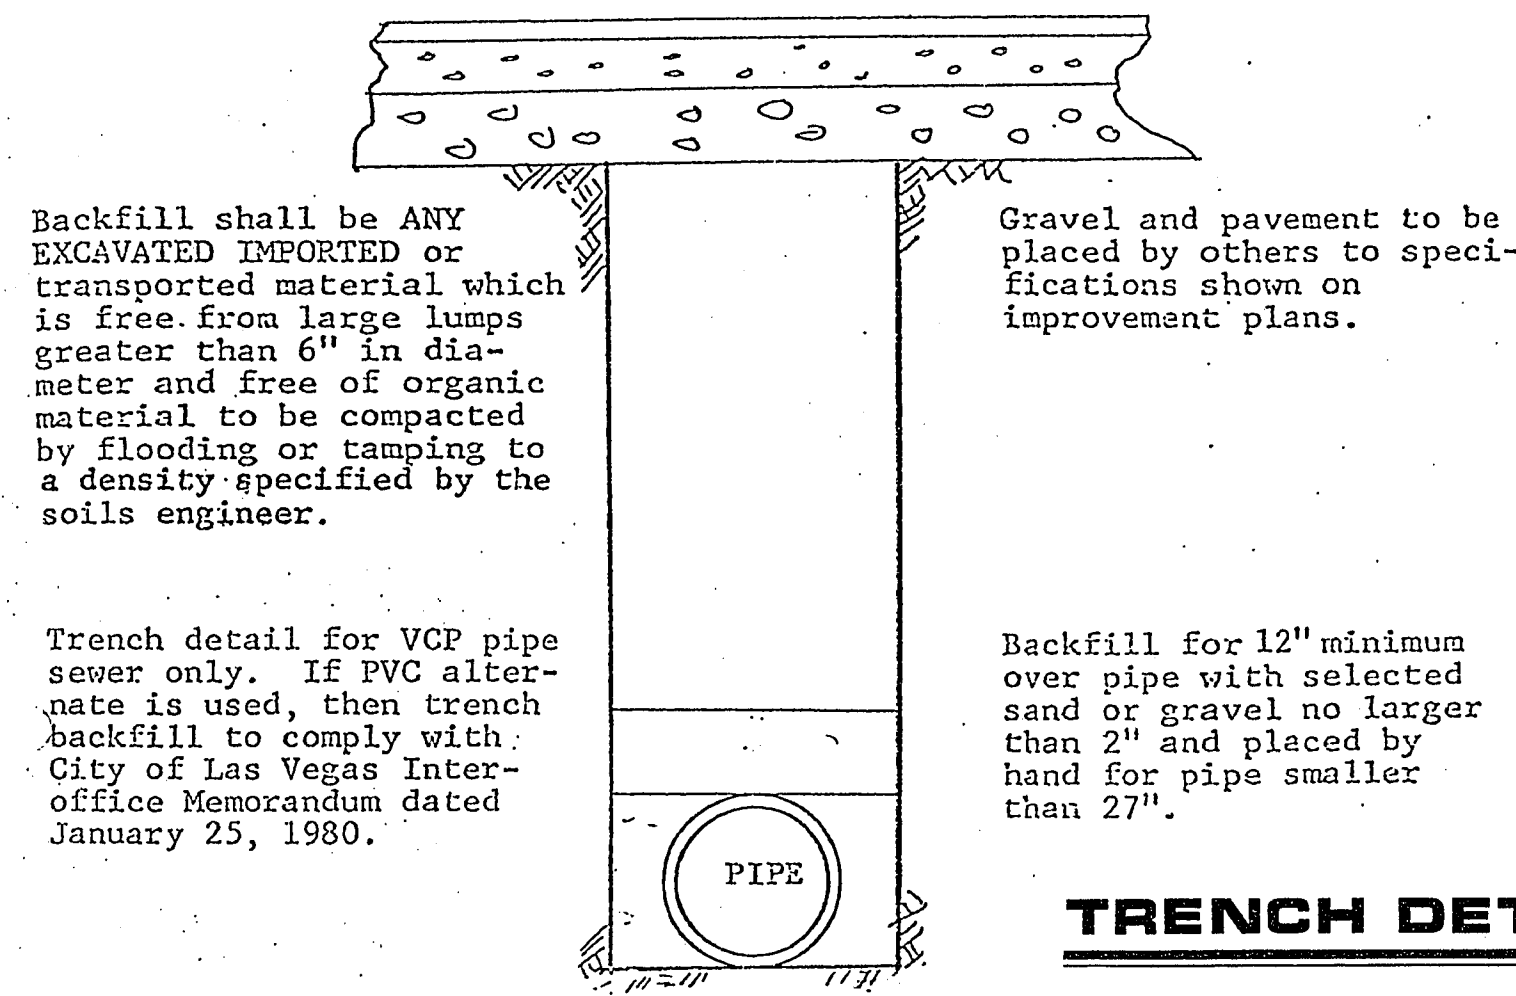

EXISTING QUAIL PARK III PHASE 2

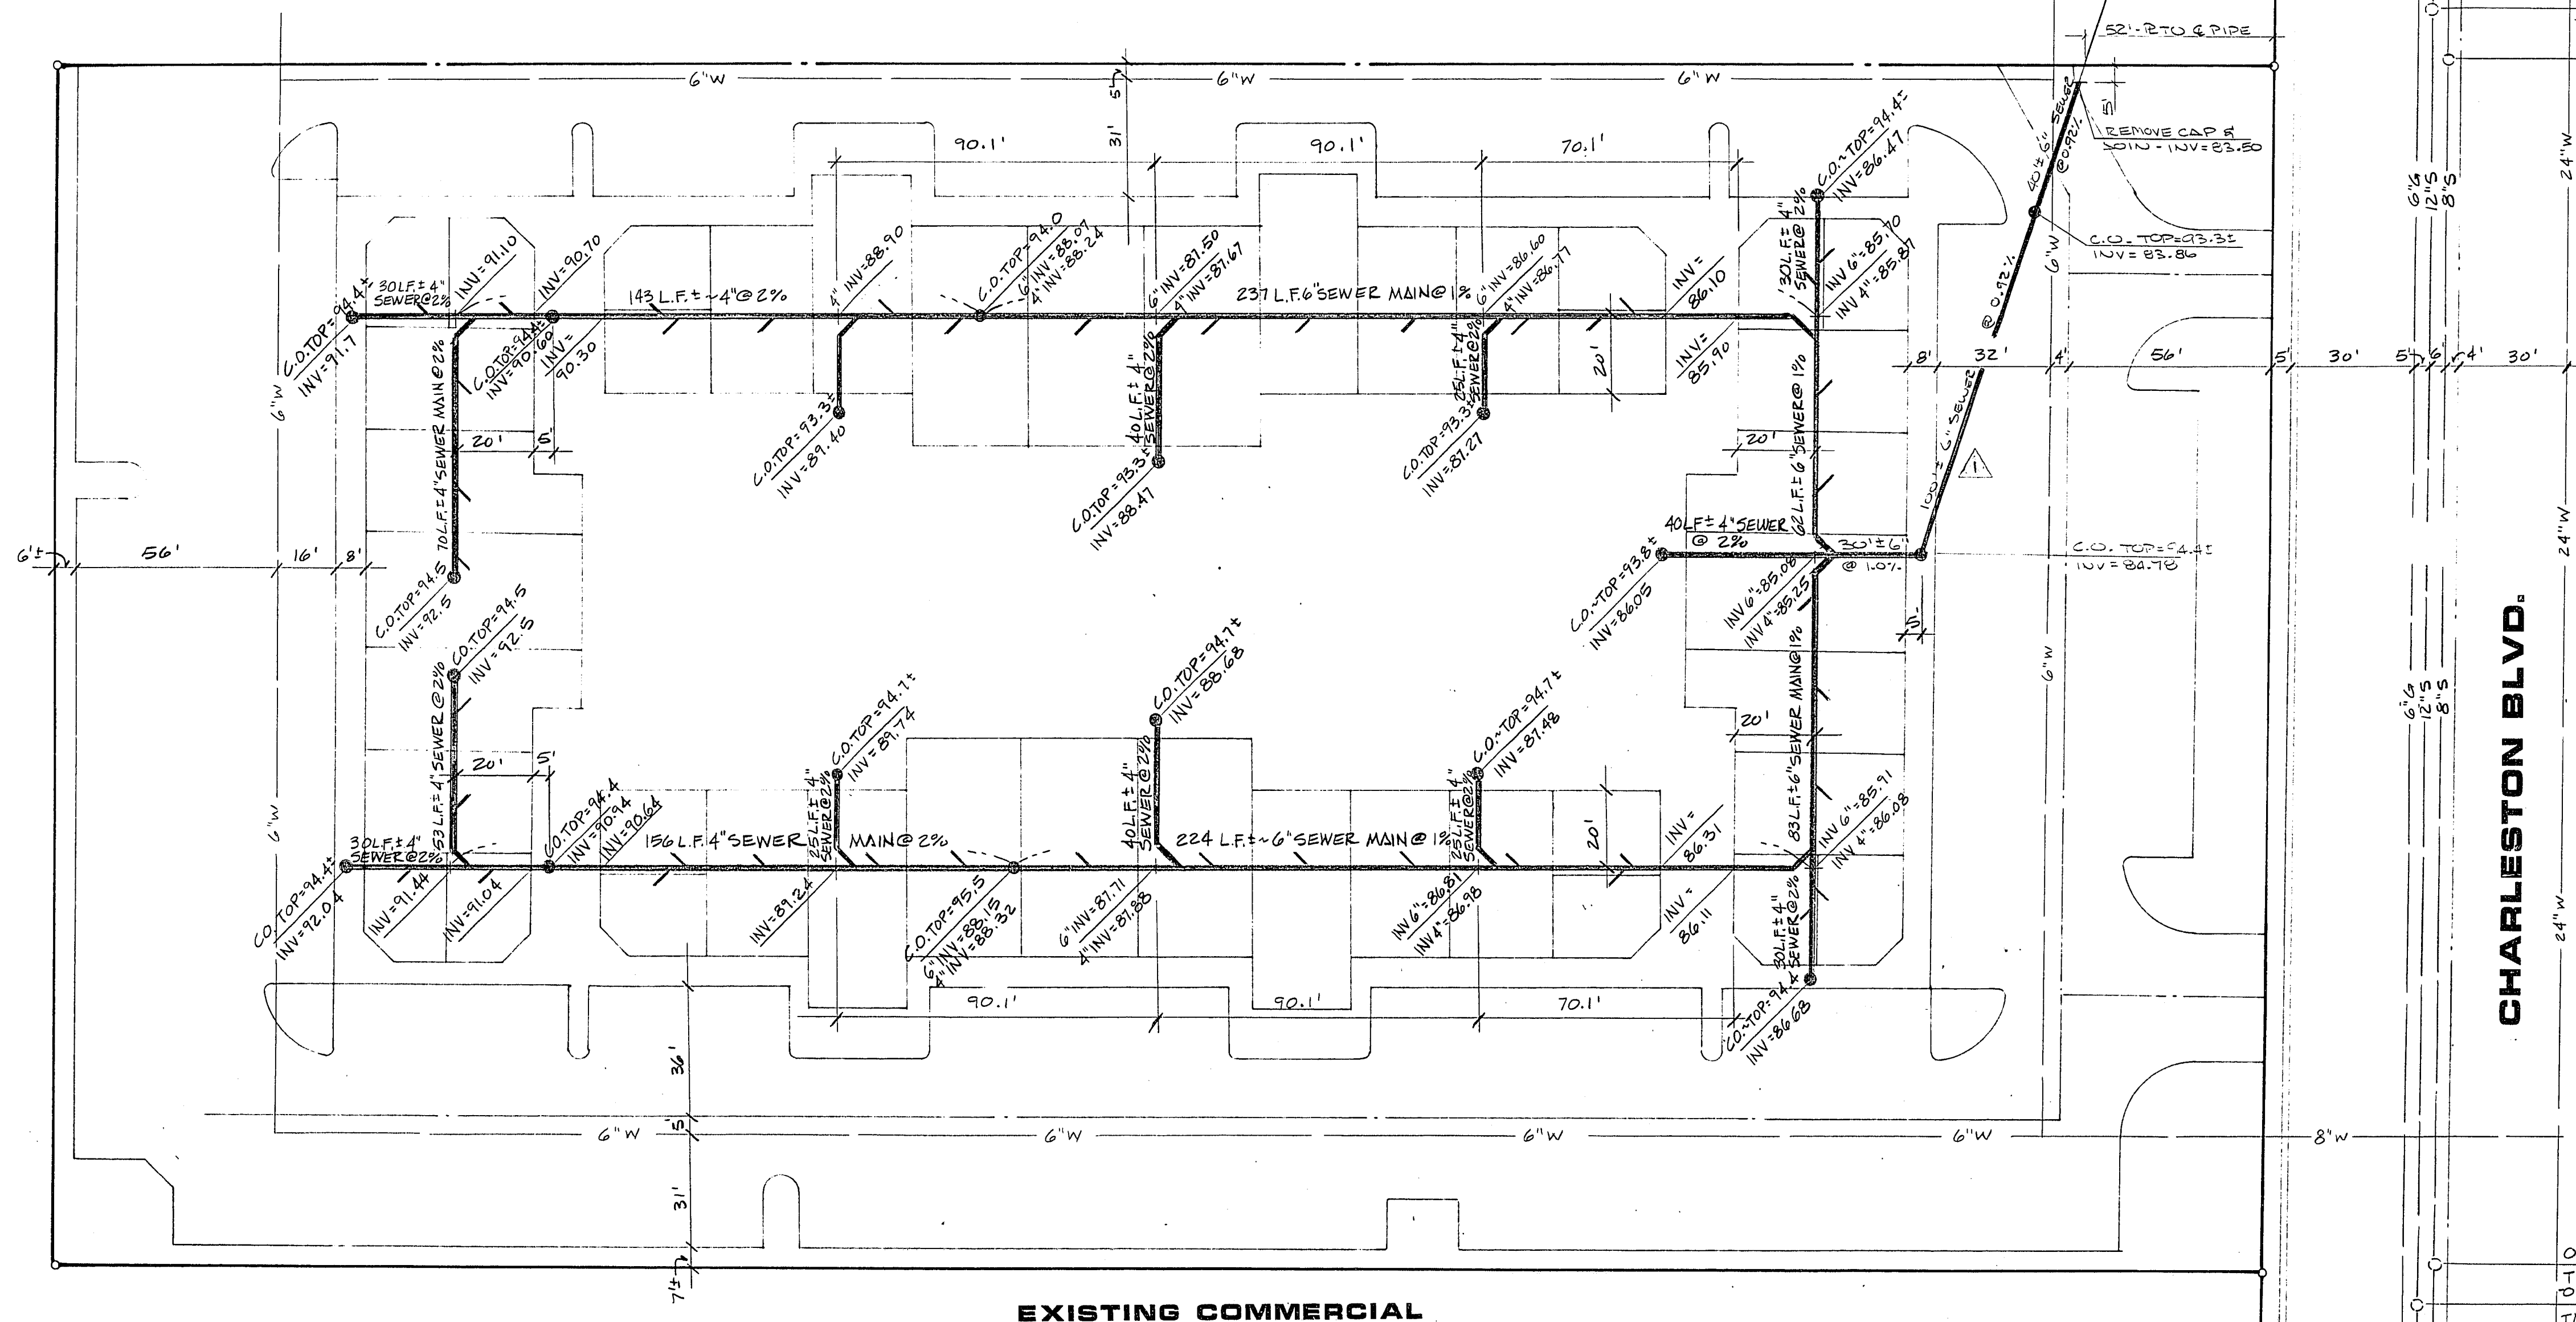

EXISTING COMMERCIAL

GENERAL NOTES

- HOUSE SERVICES SHALL COMPLY WITH WESTERN PLUMBING CODE AS TO SEPARATION DISTANCE.
- ALL HOUSES TO BE SERVED INDIVIDUALLY AS PER SECTION 313 OF THE UNIFORM PLUMBING CODE.
- CONTRACTOR SHALL FURNISH THE ENGINEER WITH AS-BUILT DRAWINGS SHOWING THE EXACT LOCATIONS OF ALL HOUSE CONNECTIONS.
- CONCRETE COLLARS TO BE CONSTRUCTED AROUND ALL MANHOLES AND WATER VALVES.
- CHISEL S OR G WHEREVER SEWER OR GAS LINES PASS UNDER CURB.

QUANTITY ESTIMATES

PUBLIC QUANTITIES	
STD 4' x 4' MANHOLE	1EA
CLEAN OUT	1EA
6" SEWER MAIN	46 L.F.
PRIVATE QUANTITIES	
CLEAN OUT	18EA
6" x 4" SERVICES WYES	19EA
4" x 4" SERVICES WYES	23EA
6" SEWER MAIN	729 L.F.
4" SEWER MAIN	767 L.F.


BENCHMARK

CLV BENCHMARK NO. 1015A3
CHARLESTON BLVD. & STRONG DR.
SE COR ELEV = 2077.314


APPROVALS

CLV SANITATION ENGINEER
C.L.V. CITY ENGINEER
C.L.V. QUALITY CONTROL


DATE 7-22-83
DATE 7/15/83
DATE

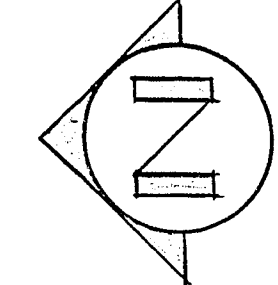

SCALE: 1" = 30'

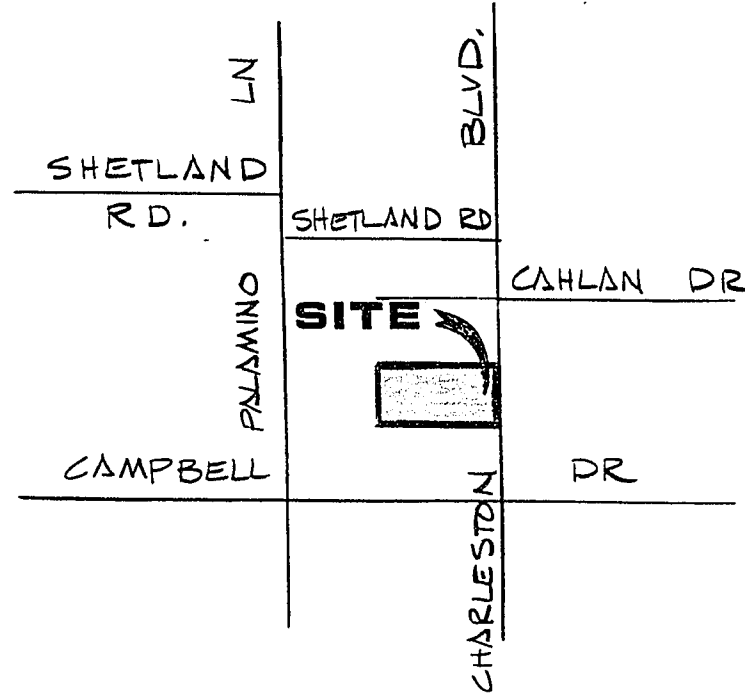

VICINITY MAP

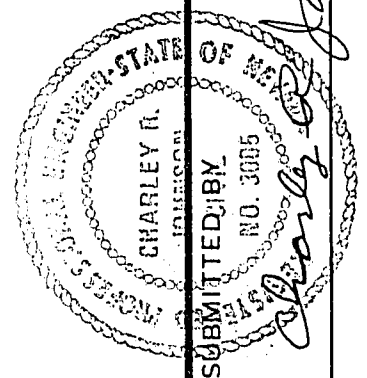

MASTER SEWER PLAN

QUAIL PARK III PHASE 1

WO NO. 2978-1
BY MJB
DATE 7-15-82
SCALE 1" = 30'

SHEET
4
OF 7 SHEETS

187-VIIS7A

CONSULTING ENGINEERS • PLANNERS
2800 W. Sahara Ave. • Las Vegas, Nevada 89102
Bldg. 4, Suite B • (702) 873-7550

vtm nevada