


NAME: P:\W7X70800\700CADD\702CIVIL\702DWG\70800-rd13.DWG DATE: FEB 21, 2002 TIME: 3:48 PM

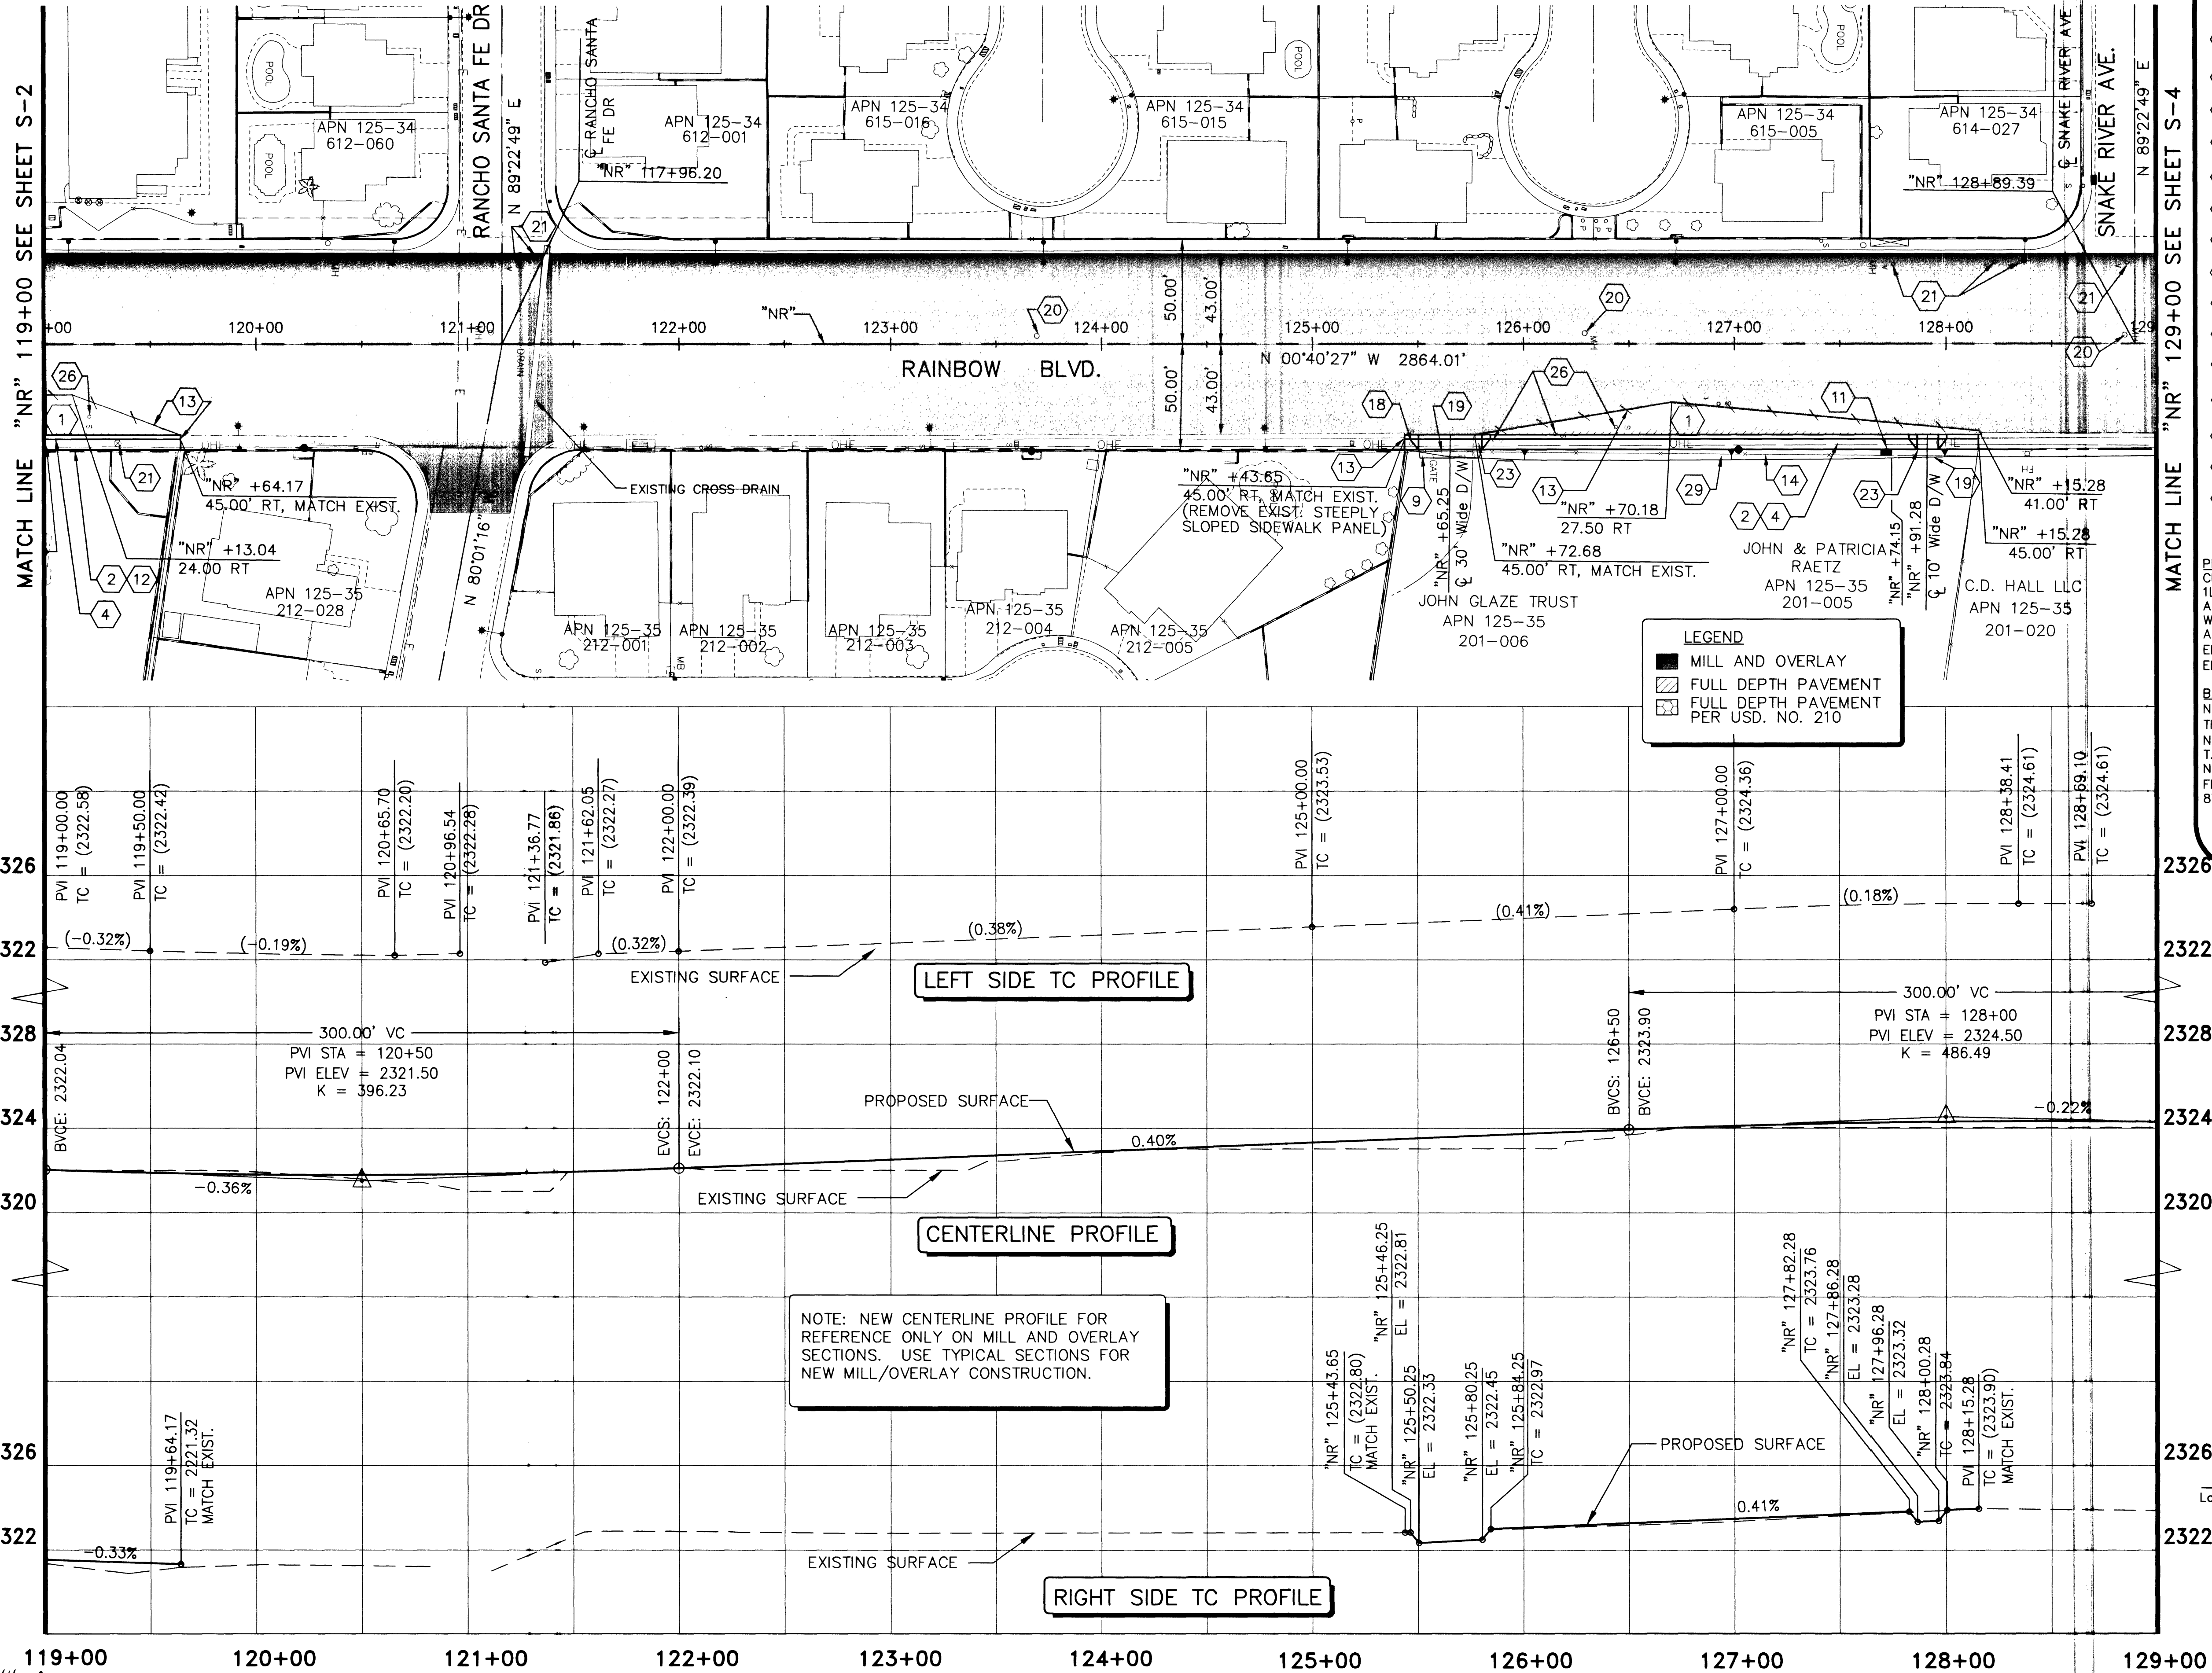


NOTES:

PAVING IMPROVEMENTS

- 1 CONSTRUCT ASPHALT PAVEMENT WITH TYPE II AGGREGATE BASE (REFER TO TYPICAL SECTIONS)
- 2 CONSTRUCT CONCRETE SIDEWALK (USD. DWG. NO. 234)
- 4 CONSTRUCT "L" TYPE CURB & GUTTER (USD. DWG. NO. 216)
- 9 CONSTRUCT PAVEMENT PER USD. DWG. NO. 210
- 11 CONSTRUCT BUS STOP LOADING PAD (USD. DWG. NO. 234.2) WITHIN EASEMENT
- 12 INSTALL 1/2" PREMOLD EXPANSION JOINT
- 13 SAWCUT
- 14 REMOVE AND RESET EXISTING 6" CHAINLINK FENCE WITH BARBED WIRE OR REMOVE AND REPLACE IN KIND
- 18 REMOVE AND RESET MAILBOX OR MAIL STATION
- 19 REMOVE AND RESET EXISTING GATE
- 20 ADJUST MANHOLE TO GRADE (USD. DWG. NO. 408)
- 21 ADJUST WATER VALVE BOX TO FINISHED GRADE PER UDACS PLATE NO. 8 (VALVE SHALL BE ACCESSIBLE AT ALL TIMES)
- 23 CONSTRUCT RESIDENTIAL DRIVEWAY (USD. DWG. NO. 223)
- 26 REMOVE SIGN(S) AND POST
- 29 RESTORE LANDSCAPING AND IRRIGATION TO MATCH EXISTING (REPLACE IN KIND)

PROJECT BENCHMARK
CITY OF LAS VEGAS BENCHMARK STATION 1LV90-26N4
A 1-INCH IRON PIPE IN THE GROUND NEXT TO A WOODEN FENCE POST AT CENTENNIAL PARKWAY AND TORRY PINES DRIVE.
ELEV. = 708.1522 METERS (NAVD'88 PUBLISHED)
ELEV. = 2323.33 U.S. SURVEY FEET (NAVD'88)

BASIS OF BEARINGS
NORTH 00°40'27" WEST, BEING THE WEST LINE OF THE SOUTHWEST QUARTER (SW 1/4) OF THE NORTHWEST QUARTER (NW 1/4) OF SECTION 35, T. 19 S., R. 60 E., M.D.M., CLARK COUNTY, NEVADA, AS SHOWN ON THAT CERTAIN MAP ON FILE IN THE COUNTY RECORDER'S OFFICE IN FILE 87, PAGE 58 OF SURVEYS.

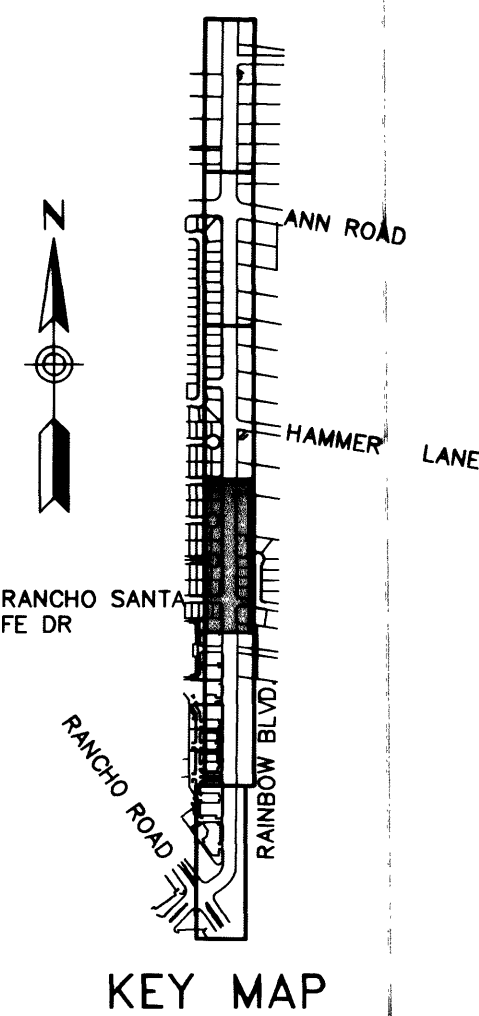

[Signature] 2/26/02
Las Vegas Valley Water District Date

Call before you Dig.
1-800-227-2600
UNDERGROUND SERVICE (USA)
CLARK COUNTY TRAFFIC MANAGEMENT OPERATIONS UNIT (702) 455-7544



PROJ NO: W7X70800
DESIGN: DEP
DATE: 2/14/2002
SCALE: 1:40
CADFILE: *[initials]*

STAMP DATE: 2/26/02

Sverdrup
CIVIL, INC.

RAINBOW BOULEVARD
RANCHO ROAD TO ANN ROAD
ROADWAY PLAN & PROFILE
"NR" 119+00 TO "NR" 129+00

SHEET
S-3
15 OF 38 SHEETS
DRAWING NO.
107-V3521