
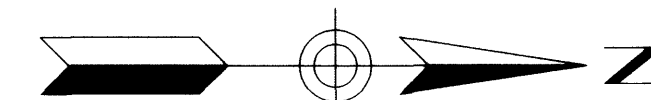


40' 20' 0 40' 80'
SCALE: 1" = 40'

MATCH LINE "NR" 129+00 SEE SHEET S-3

MATCH LINE "NR" 139+00 SEE SHEET S-5

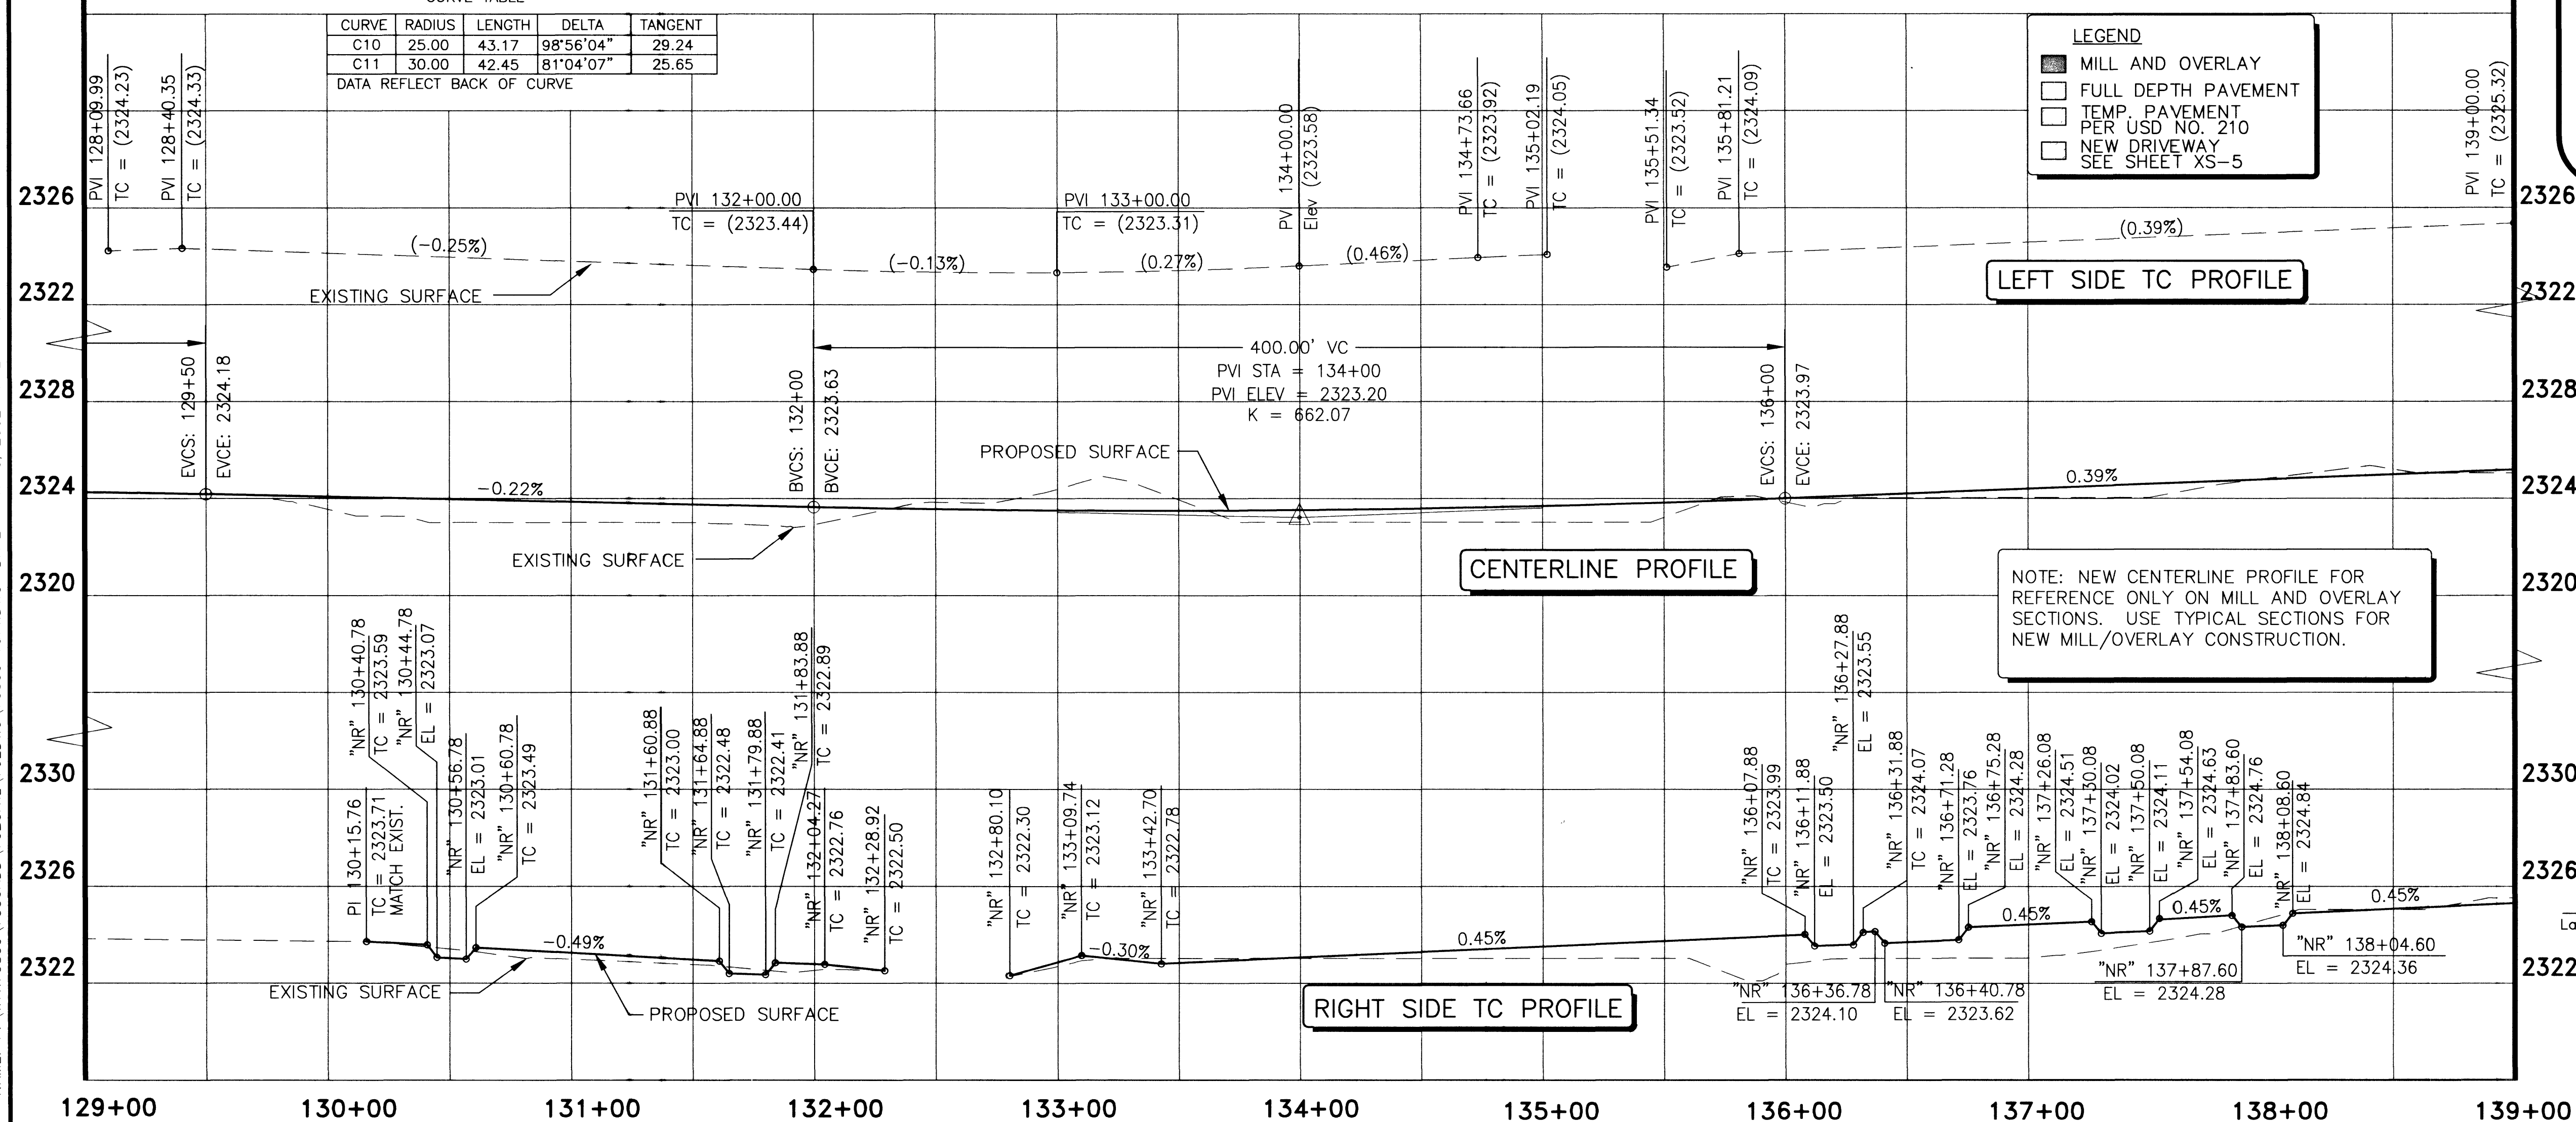

NOTES:

PAVING IMPROVEMENTS

1. CONSTRUCT ASPHALT PAVEMENT WITH TYPE II AGGREGATE BASE (REFER TO TYPICAL SECTIONS)
 2. CONSTRUCT CONCRETE SIDEWALK (USD. DWG. NO. 234)
 3. CONSTRUCT SIDEWALK RAMP CASE 1 (USD. DWG. NO. 235)
 4. CONSTRUCT "L" TYPE CURB & GUTTER (USD. DWG. NO. 218)
 8. CONSTRUCT CONCRETE BLOCK WALL (SEE DETAIL ON SHEET XS-5)
 - 8B. REMOVE EXIST. DECORATIVE WALL, REPLACE IN-KIND
 9. CONSTRUCT PAVEMENT PER USD. DWG. NO. 210
 12. INSTALL 1/2" PREMOLD EXPANSION JOINT
 13. SAWCUT
 15. INSTALL 6' CHAINLINK FENCE WITH BARBED WIRE (USD. DWG. NO. 252)
 18. REMOVE AND RESET MAILBOX OR MAIL STATION
 20. ADJUST MANHOLE TO GRADE (USD. DWG. NO. 408)
 21. ADJUST WATER VALVE BOX TO FINISHED GRADE PER UDACS PLATE NO. 8 (VALVE SHALL BE ACCESSIBLE AT ALL TIMES)
 23. CONSTRUCT RESIDENTIAL DRIVEWAY (USD. DWG. NO. 223)
 26. REMOVE SIGN(S) AND POST
 27. REMOVE TREE
 28. REMOVE BRICK COLUMN
 29. RESTORE LANDSCAPING AND IRRIGATION TO MATCH EXISTING (REPLACE IN-KIND)
- PROJECT BENCHMARK**
CITY OF LAS VEGAS BENCHMARK STATION 11V90-26N4
A 1-INCH IRON PIPE IN THE GROUND NEXT TO A WOODEN FENCE POST AT CENTENNIAL PARKWAY AND TORRY PINES DRIVE.
ELEV. = 708.1522 METERS (NAVD'88 PUBLISHED)
ELEV. = 2323.33 U.S. SURVEY FEET (NAVD'88)
- BASIS OF BEARINGS**
NORTH 00°40'27" WEST, BEING THE WEST LINE OF THE SOUTHWEST QUARTER (SW 1/4) OF THE NORTHWEST QUARTER (NW 1/4) OF SECTION 35, T. 19 S., R. 60 E., M.D.M., CLARK COUNTY, NEVADA, AS SHOWN ON THAT CERTAIN MAP ON FILE IN THE COUNTY RECORDER'S OFFICE IN FILE 87, PAGE 58 OF SURVEYS.

STAMP DATE:

5450 W. SHARPA AVE. SUITE 150
LAS VEGAS, NEVADA 89102-1846
PHONE: (702) 890-2100
FAX: (702) 890-1101**Sverdrup**
CIVIL, INC.RAINBOW BOULEVARD
RANCHO ROAD TO ANN ROAD
ROADWAY PLAN & PROFILE
"NR" 129+00 TO "NR" 139+00SHEET
S-4
16 OF 38 SHEETS
DRAWING NO.
107-V3521