

NAME: P:\W7X70800\700CADD\702CIVIL\702DWG\70800-rd15.DWG DATE: APR 15, 2002 TIME: 11:58 AM




LEGEND	
	MILL AND OVERLAY
	FULL DEPTH PAVEMENT
	FULL DEPTH PAVEMENT PER UDS NO. 210

NOTES:

- PAVING IMPROVEMENTS
- CONSTRUCT ASPHALT PAVEMENT WITH TYPE II AGGREGATE BASE (REFER TO TYPICAL SECTIONS)
 - CONSTRUCT CONCRETE SIDEWALK (USD. DWG. NO. 234)
 - CONSTRUCT "L" TYPE CURB & GUTTER (USD. DWG. NO. 216)
 - CONSTRUCT TACK-ON ISLAND (USD. DWG. NO. 221)
 - CONSTRUCT CONCRETE BLOCK WALL (SEE DETAIL ON SHEET XS-5)
 - REMOVE EXIST. DECORATIVE WALL, REPLACE IN-KIND
 - CONSTRUCT PAVEMENT PER USD. DWG. NO. 210
 - INSTALL 1/2" PREMOLD EXPANSION JOINT
 - SAWCUT
 - REMOVE AND RESET MAILBOX OR MAIL STATION
 - ADJUST MANHOLE TO GRADE (USD. DWG. NO. 408)
 - ADJUST WATER VALVE BOX TO FINISHED GRADE PER UDACS PLATE NO. 8 (VALVE SHALL BE ACCESSIBLE AT ALL TIMES)
 - CONSTRUCT RESIDENTIAL DRIVEWAY (USD. DWG. NO. 223)
 - REMOVE SIGN(S) AND POST
 - RESTORE LANDSCAPING AND IRRIGATION TO MATCH EXISTING (REPLACE IN-KIND)

PROJECT BENCHMARK
CITY OF LAS VEGAS BENCHMARK STATION
11V90-26N4
A 1-INCH IRON PIPE IN THE GROUND NEXT TO A WOODEN FENCE POST AT CENTENNIAL PARKWAY AND TORRY PINES DRIVE.
ELEV. = 708.1522 METERS (NAVD'88 PUBLISHED)
ELEV. = 2323.33 U.S. SURVEY FEET (NAVD'88)

BASIS OF BEARINGS
NORTH 00°40'27" WEST, BEING THE WEST LINE OF THE SOUTHWEST QUARTER (SW 1/4) OF THE NORTHWEST QUARTER (NW 1/4) OF SECTION 35, T. 19 S., R. 60 E., M.D.M., CLARK COUNTY, NEVADA, AS SHOWN ON THAT CERTAIN MAP ON FILE IN THE COUNTY RECORDER'S OFFICE IN FILE 87, PAGE 58 OF SURVEYS.

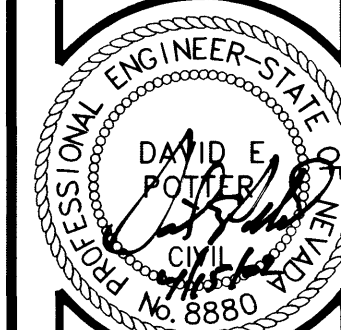




STAMP DATE:

5450 W. SARARA AVE., SUITE 150
LAS VEGAS, NEVADA 89102-1846
PHONE (702) 906-1231
FAX (702) 906-1231

Sverdrup
CIVIL, INC.

RAINBOW BOULEVARD
RANCHO ROAD TO ANN ROAD
ROADWAY PLAN & PROFILE
"NR" 139+00 TO "NR" 149+00

SHEET
S-5
17 OF 38 SHEETS
DRAWING NO.
107-V3521

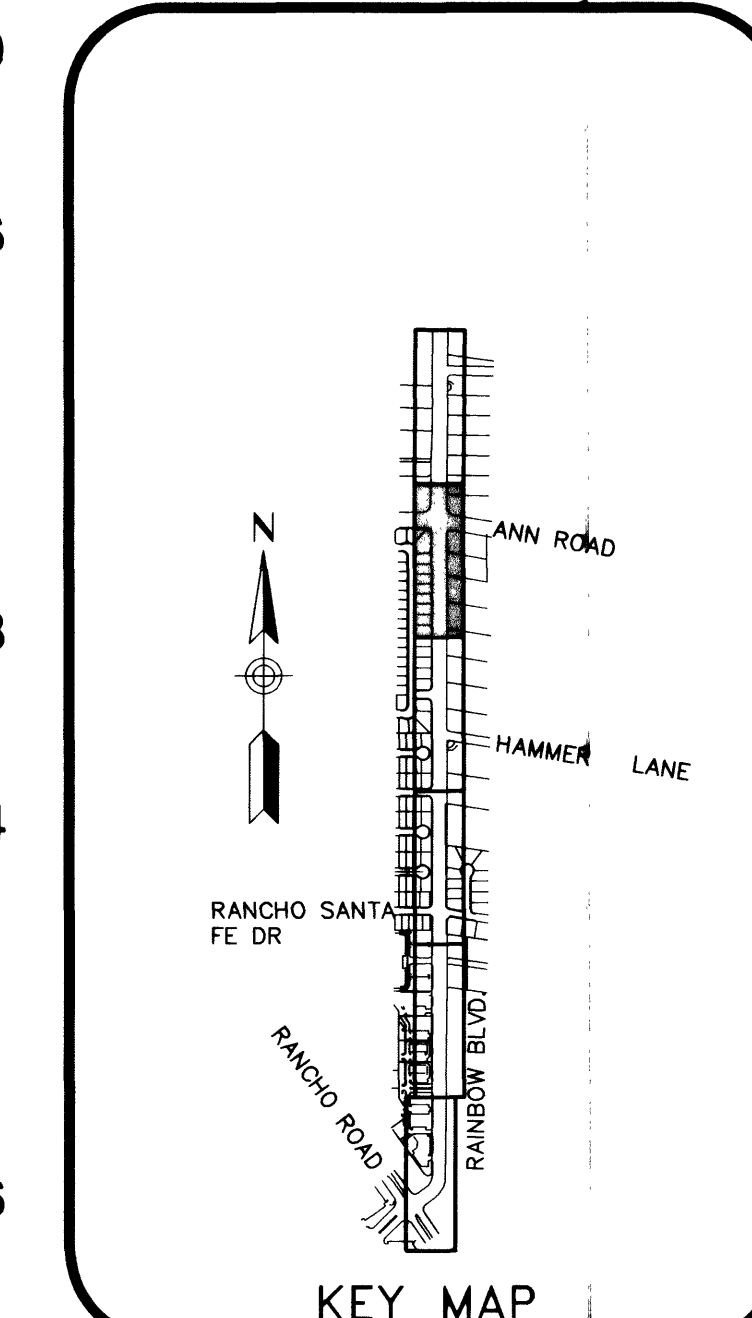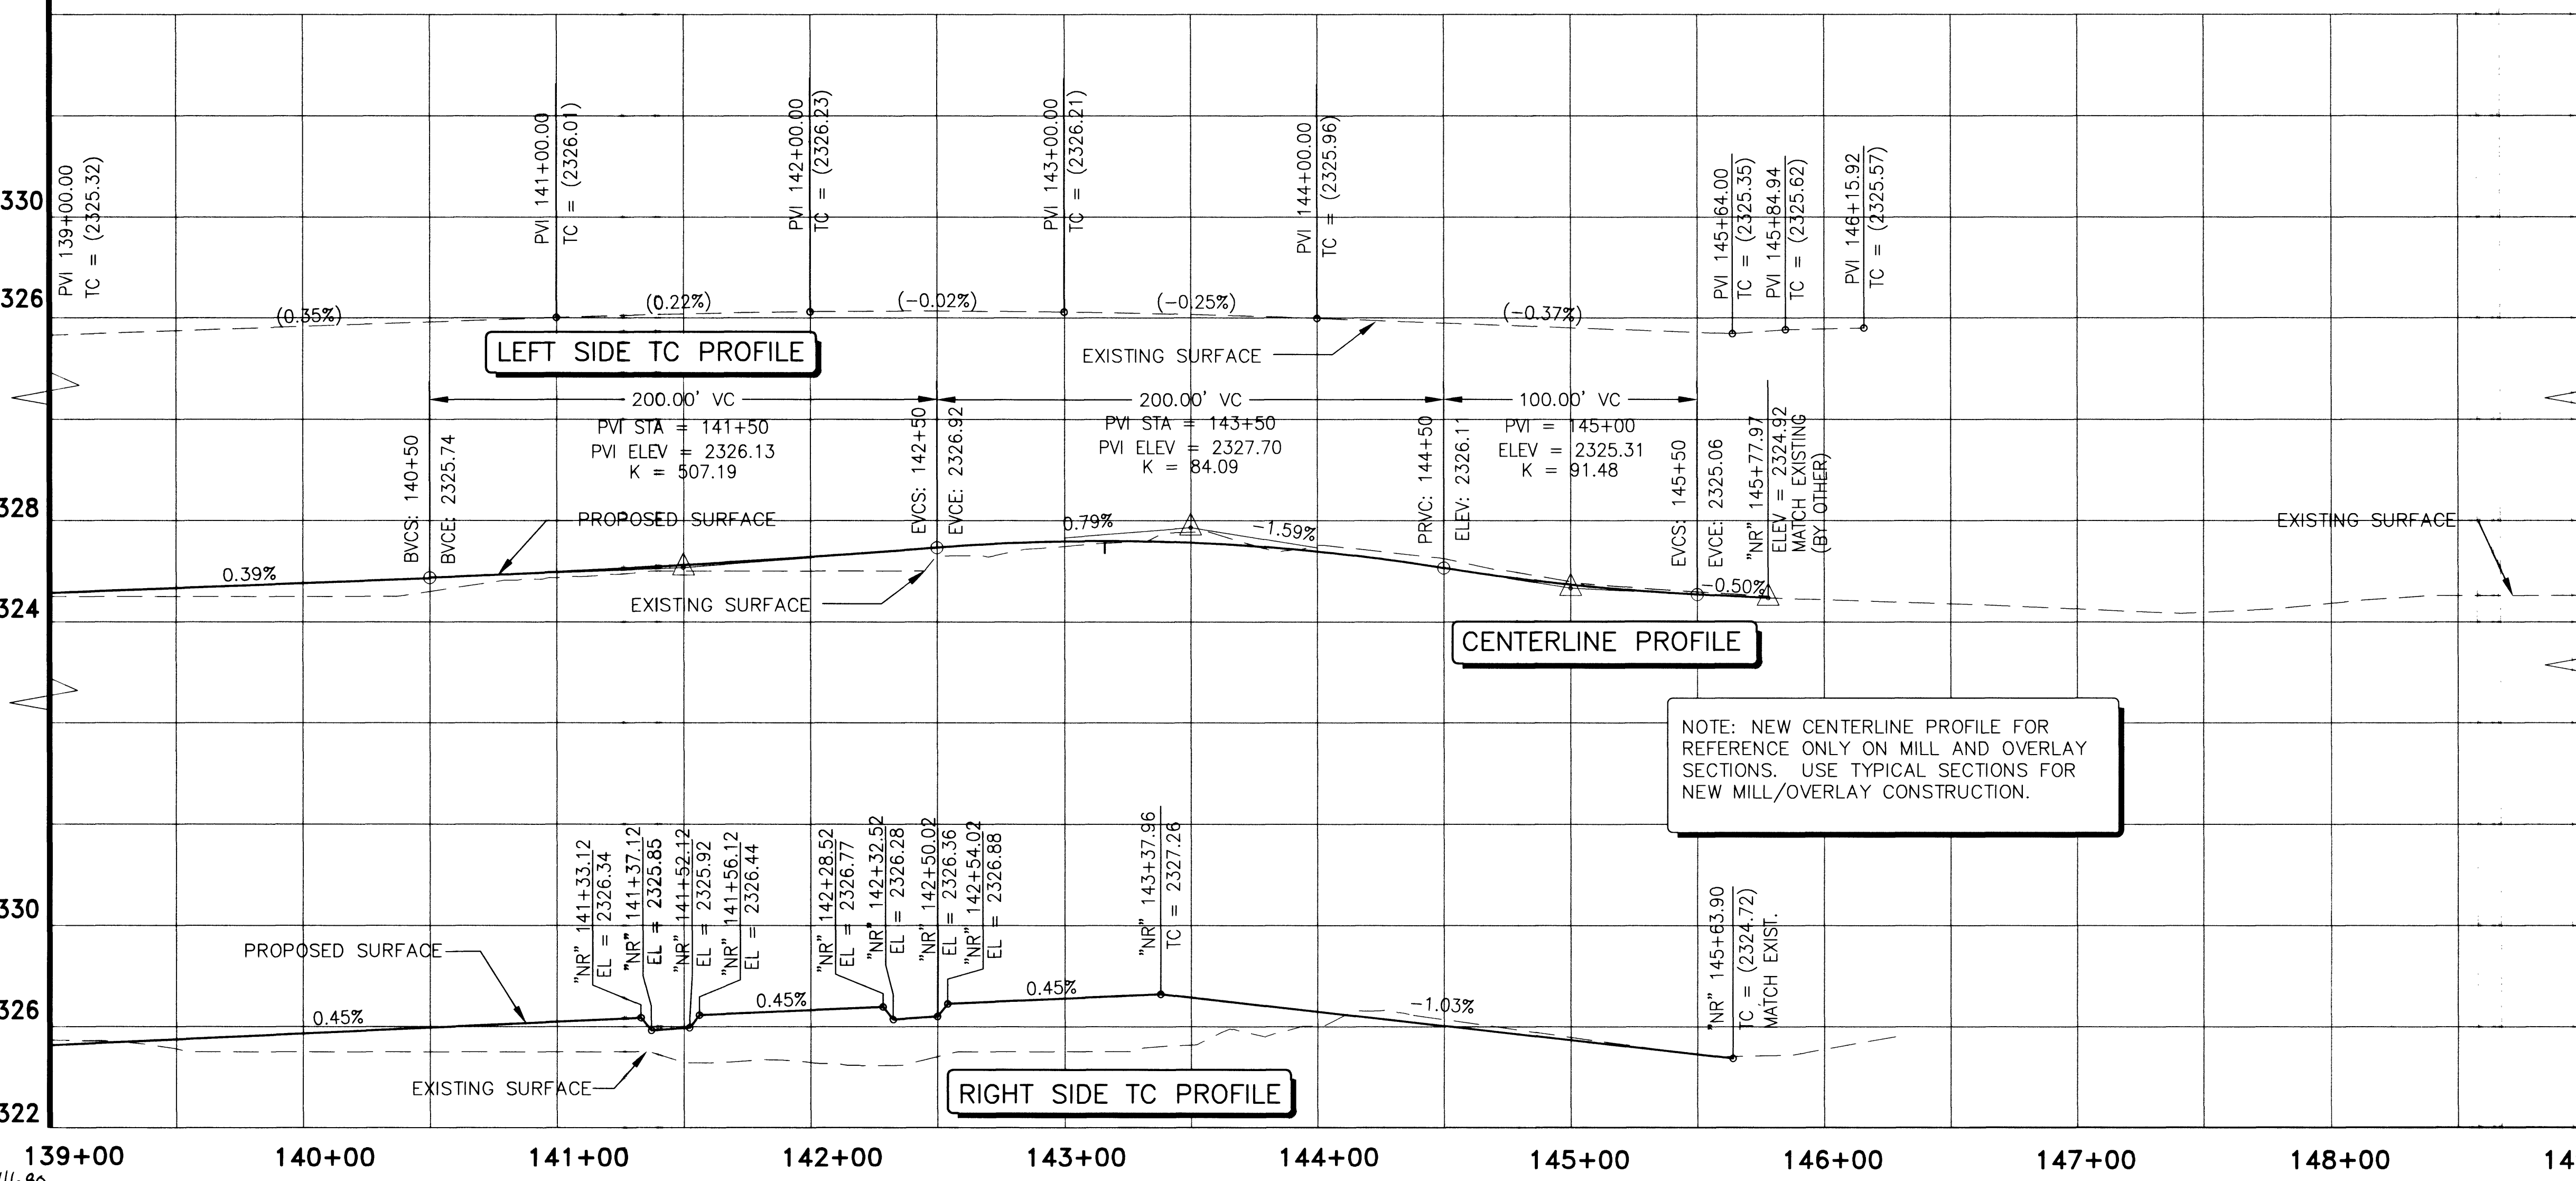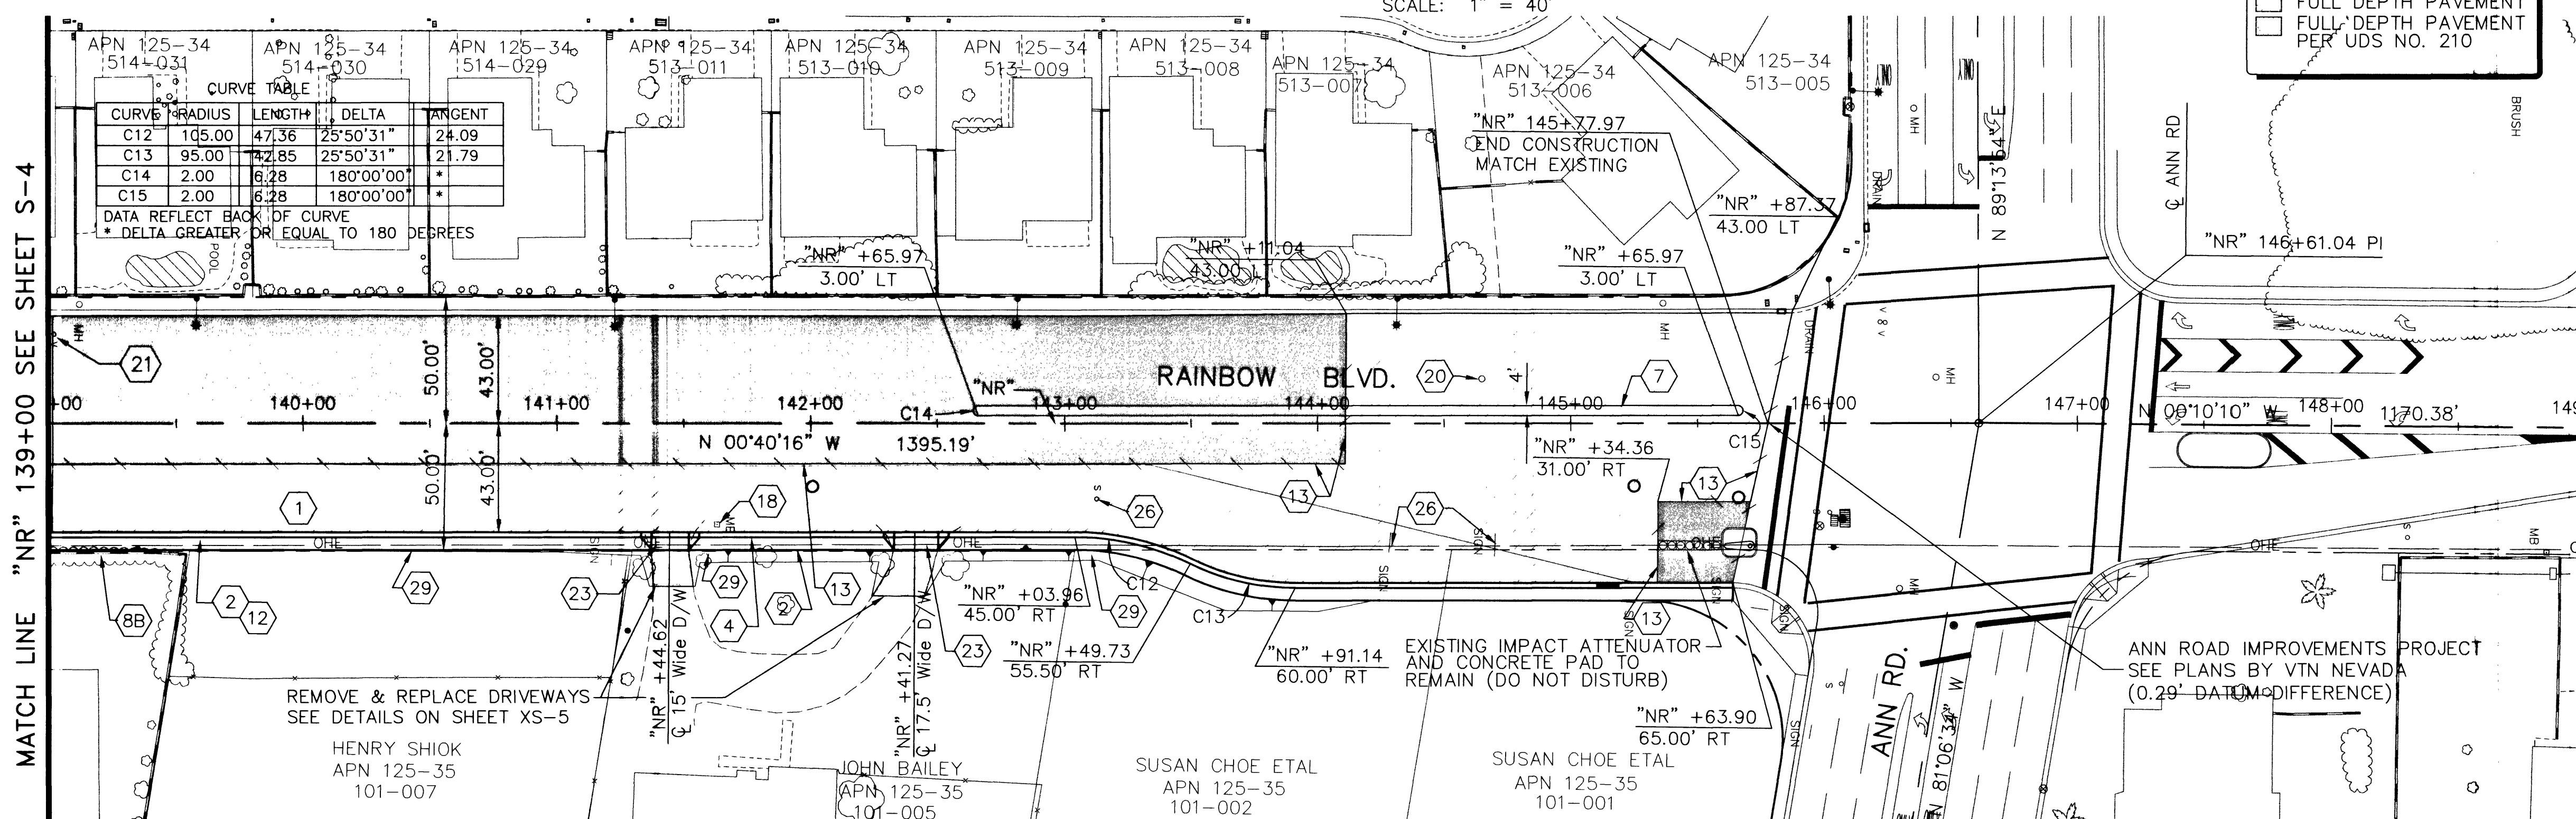

Las Vegas Valley Water District

Call before you Dig.
1-800-227-2600
UNDERGROUND SERVICE (USA)
CLARK COUNTY TRAFFIC MANAGEMENT
OPERATIONS UNIT (702) 455-7544

CALL BEFORE YOU DIG
OVERHEAD
1-702-593-6111