




LINE TABLE

LINE	BEARING	DISTANCE
L1	S 0° 32' 07" W	15.00
L2	S 89° 27' 53" E	15.00
L3	S 0° 32' 07" W	15.00
L4	S 89° 27' 53" E	15.00
L5	N 89° 27' 53" E	15.00
L6	N 89° 27' 53" E	15.00
L7	N 89° 27' 53" E	15.00

CURVE TABLE

CURVE	ARC	DELTA	RADIUS	TAN LENGTH
C1	314.16	30° 00' 00"	500.00	160.77
C2	314.16	30° 00' 00"	500.00	160.77
C3	314.16	30° 00' 00"	500.00	160.77
C4	314.16	30° 00' 00"	500.00	160.77
C5	314.16	30° 00' 00"	500.00	160.77
C6	314.16	30° 00' 00"	500.00	160.77
C7	314.16	30° 00' 00"	500.00	160.77
C8	314.16	30° 00' 00"	500.00	160.77
C9	314.16	30° 00' 00"	500.00	160.77
C10	314.16	30° 00' 00"	500.00	160.77
C11	314.16	30° 00' 00"	500.00	160.77

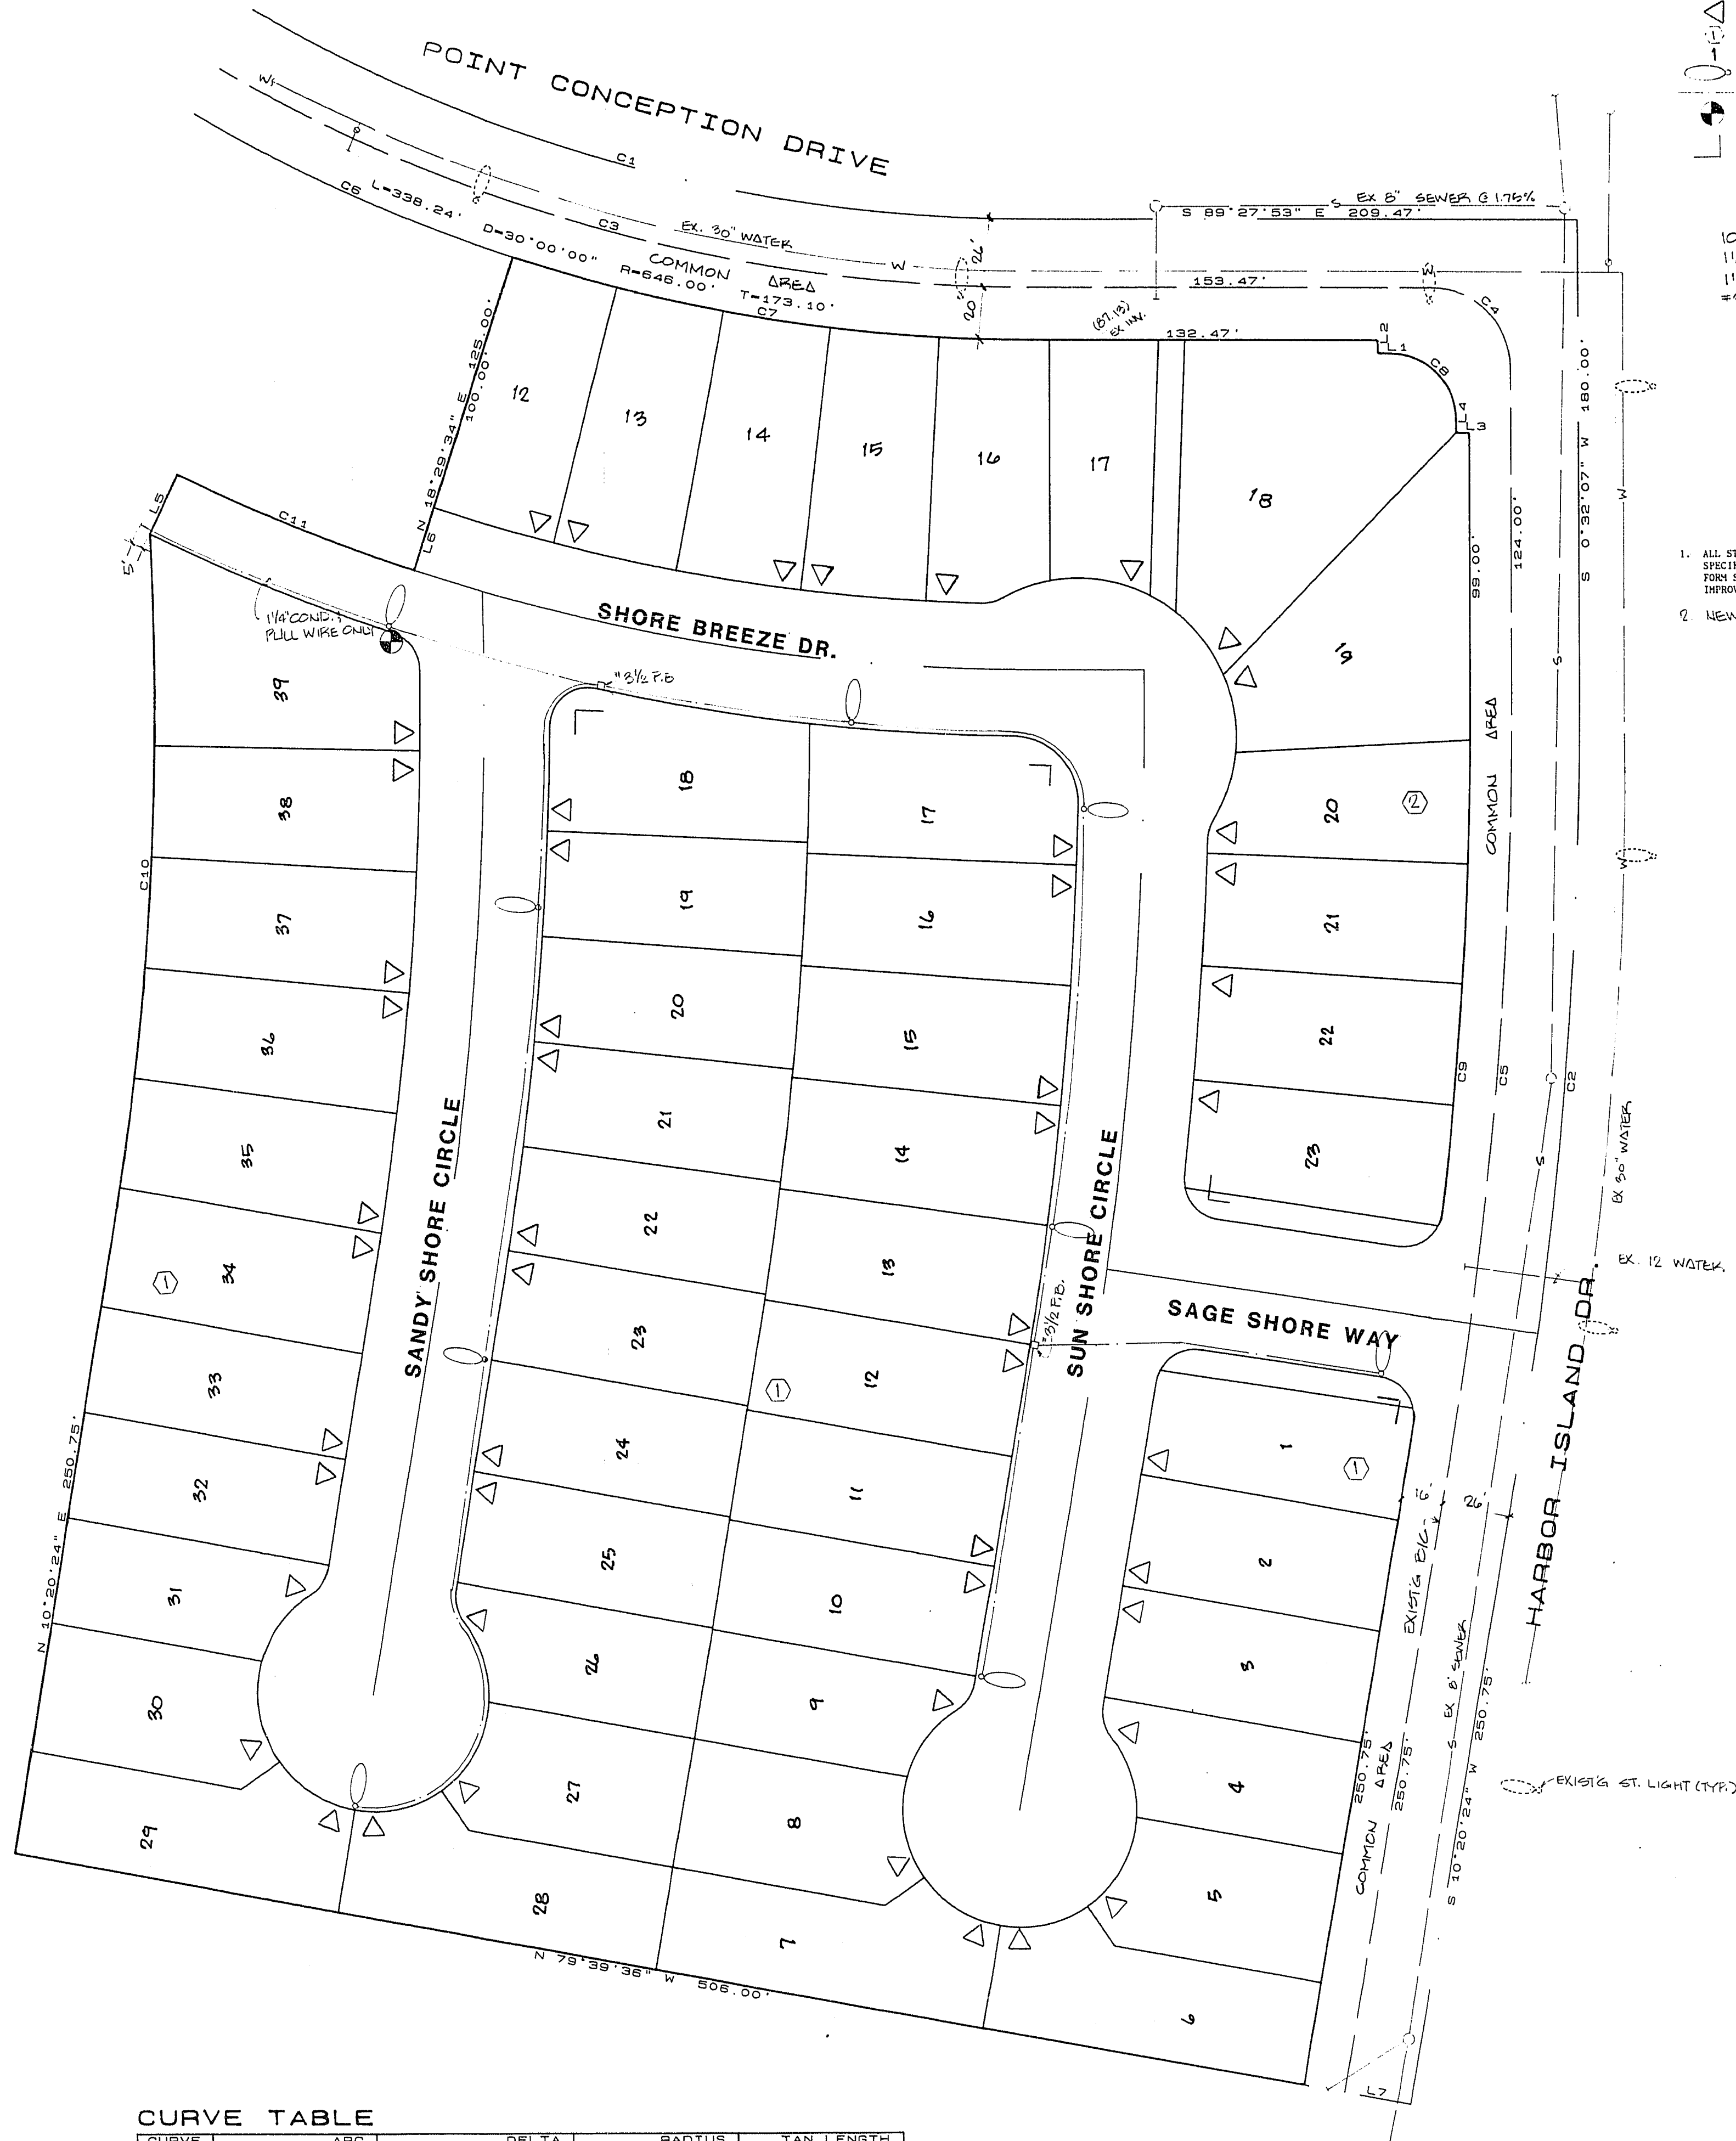

LEGEND


- EXISTING WATER MAIN
- SEWER MAIN
- DRIVEWAY LOCATION
- BLOCK NUMBER
- LOT NUMBER
- 11/4" S.D. 1" C.T. LIGHT
- 11/4" CONDUIT 1 CONDUCTOR
- SERVICE POINT
- STREET SIGN

STREET LIGHT ESTIMATE

100W HPS LUMINAIRE 1 POLE	9 EA
11/4" CONDUIT 1 CONDUCTOR	1070 L.F.
11/4" CONDUIT ONLY	105 L.F.
*3/4" PULL BOX	2 EA

C L V STREETLIGHT NOTES

- ALL STREET LIGHT INSTALLATIONS SHALL CONFORM TO THE STANDARD DETAILS AND SPECIFICATIONS OF THE CITY OF LAS VEGAS, AND SHALL ALSO CONFORM TO THE UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OF OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA, LATEST EDITION, UNLESS OTHERWISE NOTED.
- NEW SERVICE REQUIRED

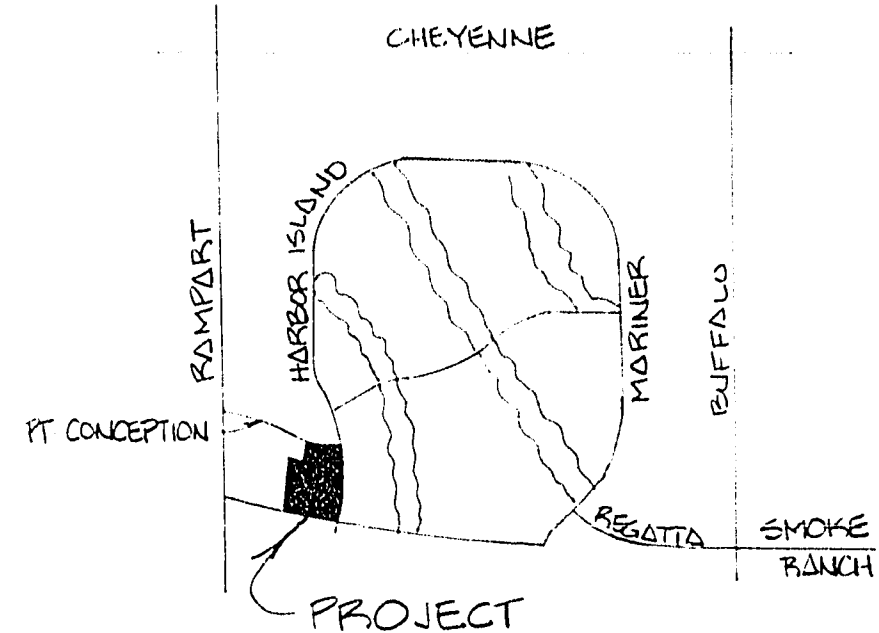

VICINITY MAP

SOUTHWEST
ENGINEERING
LAND PLANNING • MAPPING • DEVELOPMENT
1725 S. RAINBOW BLVD., STE. 200, LAS VEGAS, NEVADA 89102
(702) 361-5700

TITLE
MASTER STREETLIGHT PLAN
PROJECT
SAGE SHORES

W.O. No. 880606
BY M. JONES
DATE 8/88
SCALE 1" = 40'

SHEET
8
OF 8 SHEETS

EXISTING UTILITIES ARE LOCATED ON PLANS FOR THE CONVIENIENCE OF THE CONTRACTOR ONLY. THE ENGINEER BEARS NO RESPONSIBILITY FOR THE LOCATION OF UTILITIES SHOWN OR NOT SHOWN ON THE PLANS. THE CONTRACTOR SHALL NOTIFY ALL UTILITY COMPANIES BEFORE STARTING CONSTRUCTION AND IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE LOCATION OF ALL UTILITIES WITH THE UTILITY COMPANIES.

Call
before you
Dig.

1-800-227-2600
UNDERGROUND SERVICE JAPAN

Avoid cutting underground utility lines. It's costly.

Avoid cutting underground utility lines. It's costly.

Avoid cutting underground utility lines. It's costly.

Avoid cutting underground utility lines. It's costly.