


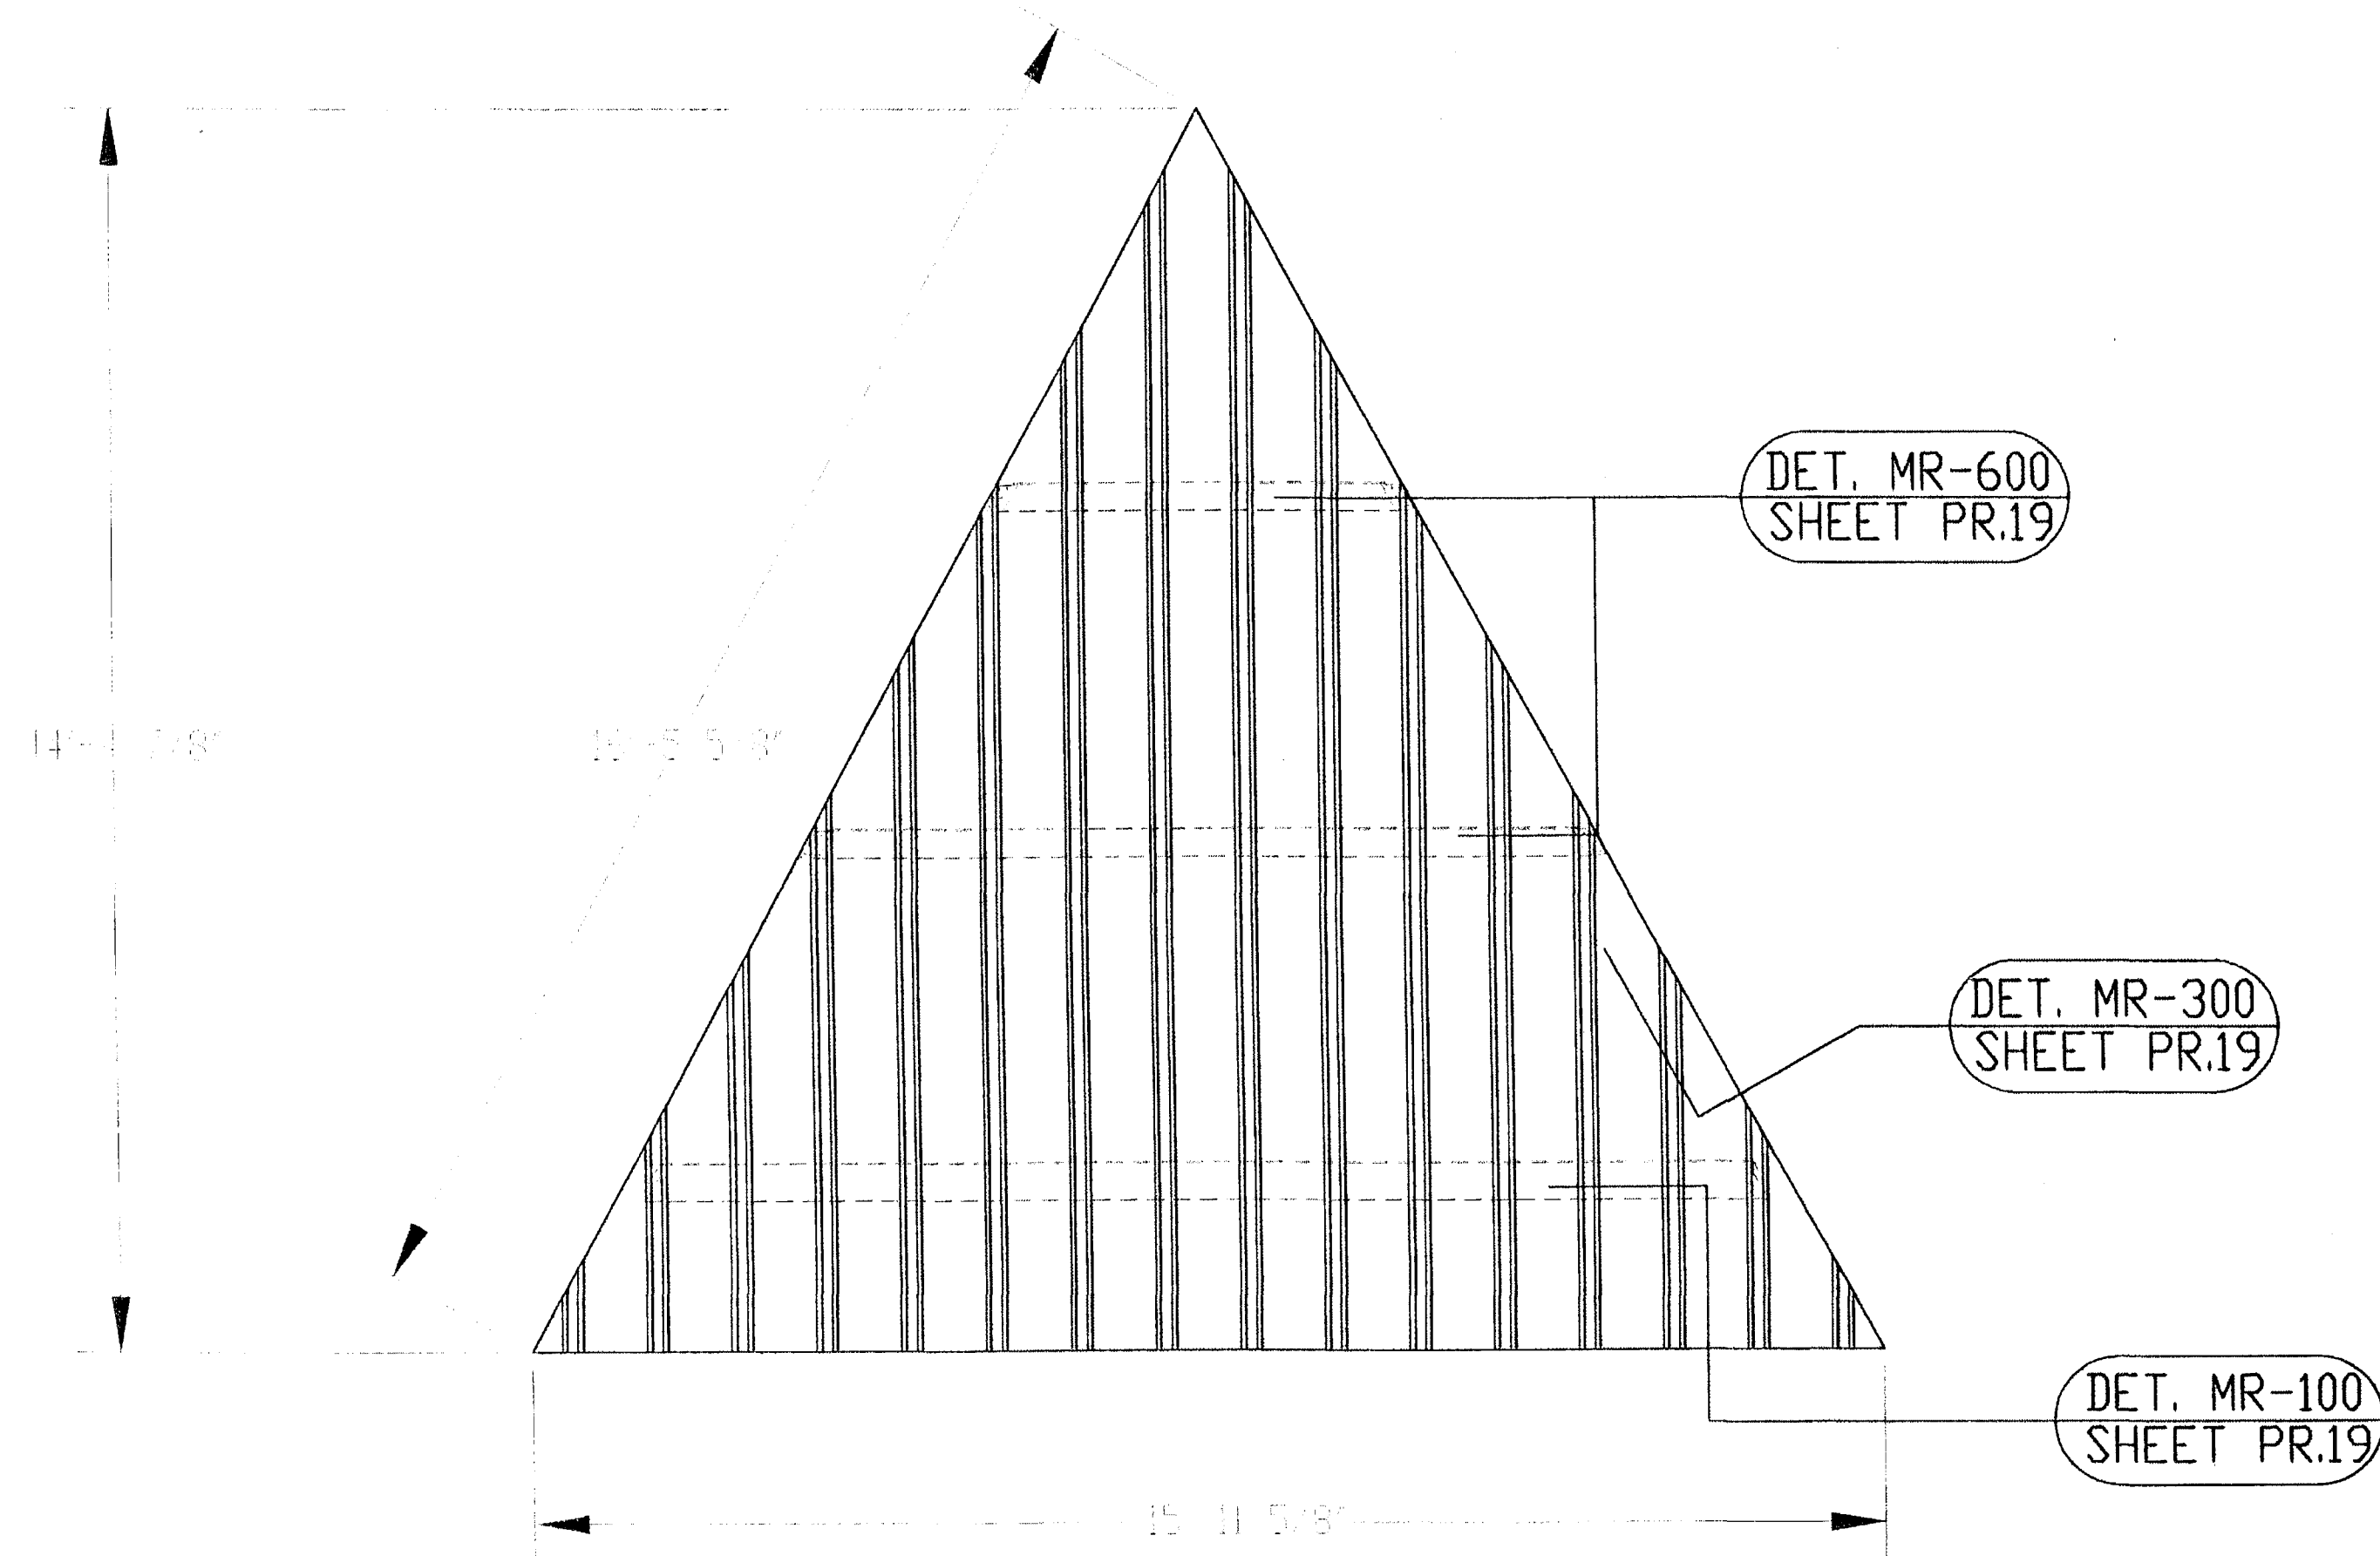

THE DETAILS SHOWN ARE SUGGESTIONS OF GUIDELINES ON HOW TO ERECT THE SYSTEMS. THE INFORMATION SHOWN IS ACCURATE, BUT IT IS NOT INTENDED TO COVER ALL INSTANCES. BUILDING REQUIREMENTS, DESIGN OR CODES THE DETAILS MAY REQUIRE CHANGES OR REVISIONS DUE TO FIELD CONDITIONS.

IT WILL BE THE RESPONSIBILITY OF THE ERECTOR TO ENSURE THAT THE DETAILS MEET PARTICULAR BUILDING REQUIREMENTS AND TO ASSURE ADEQUATE WATER TIGHTNESS.


THE ERECTOR SHOULD THOROUGHLY FAMILIARIZE HIMSELF/HERSELF WITH ALL ERECTION INSTRUCTIONS, BEFORE STARTING WORK.

THE PANEL SHOULD BE INSTALLED PLUMB, STRAIGHT, AND ACCURATELY TO THE ADJACENT WORK.



FLASHING AND TRIM SHALL BE INSTALLED TRUE, AND IN PROPER ALIGNMENT, WITH ANY EXPOSED FASTENERS EQUALLY SPACED FOR THE BEST APPEARANCE.

SEALANT SHALL BE FIELD APPLIED ONLY. CLEAN SURFACES, SOME FIELD CUTTING AND FITTING OF PANELS AND FLASHING IS TO BE EXPECTED BY THE ERECTOR AND MINOR FIELD CORRECTIONS ARE A PART OF NORMAL ERECTION WORK.

THE ERECTOR SHALL FOLLOW THE BEST INDUSTRY STANDARDS AND INSTALLATION SHALL BE SUPERVISED BY EXPERIENCED METAL CRAFTSMEN.

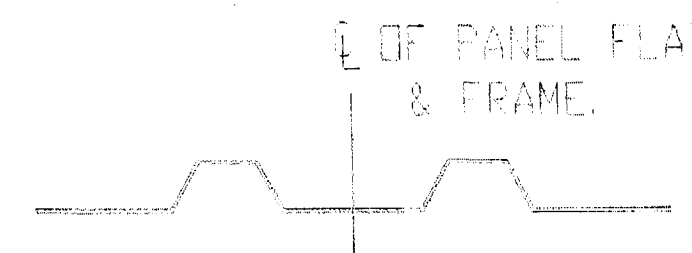

TO BEGIN: Mark the center of the compression ring and tension ring. Locate one of the longest panels with center of panel at center of frame, and work out to corners. Complete each pie in this fashion.

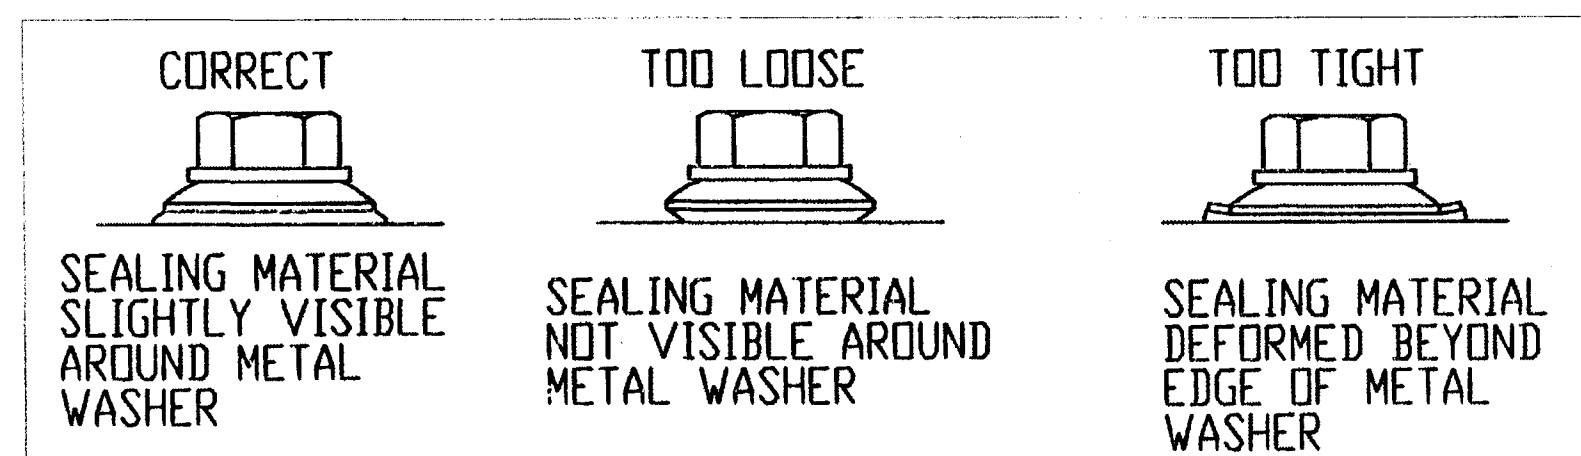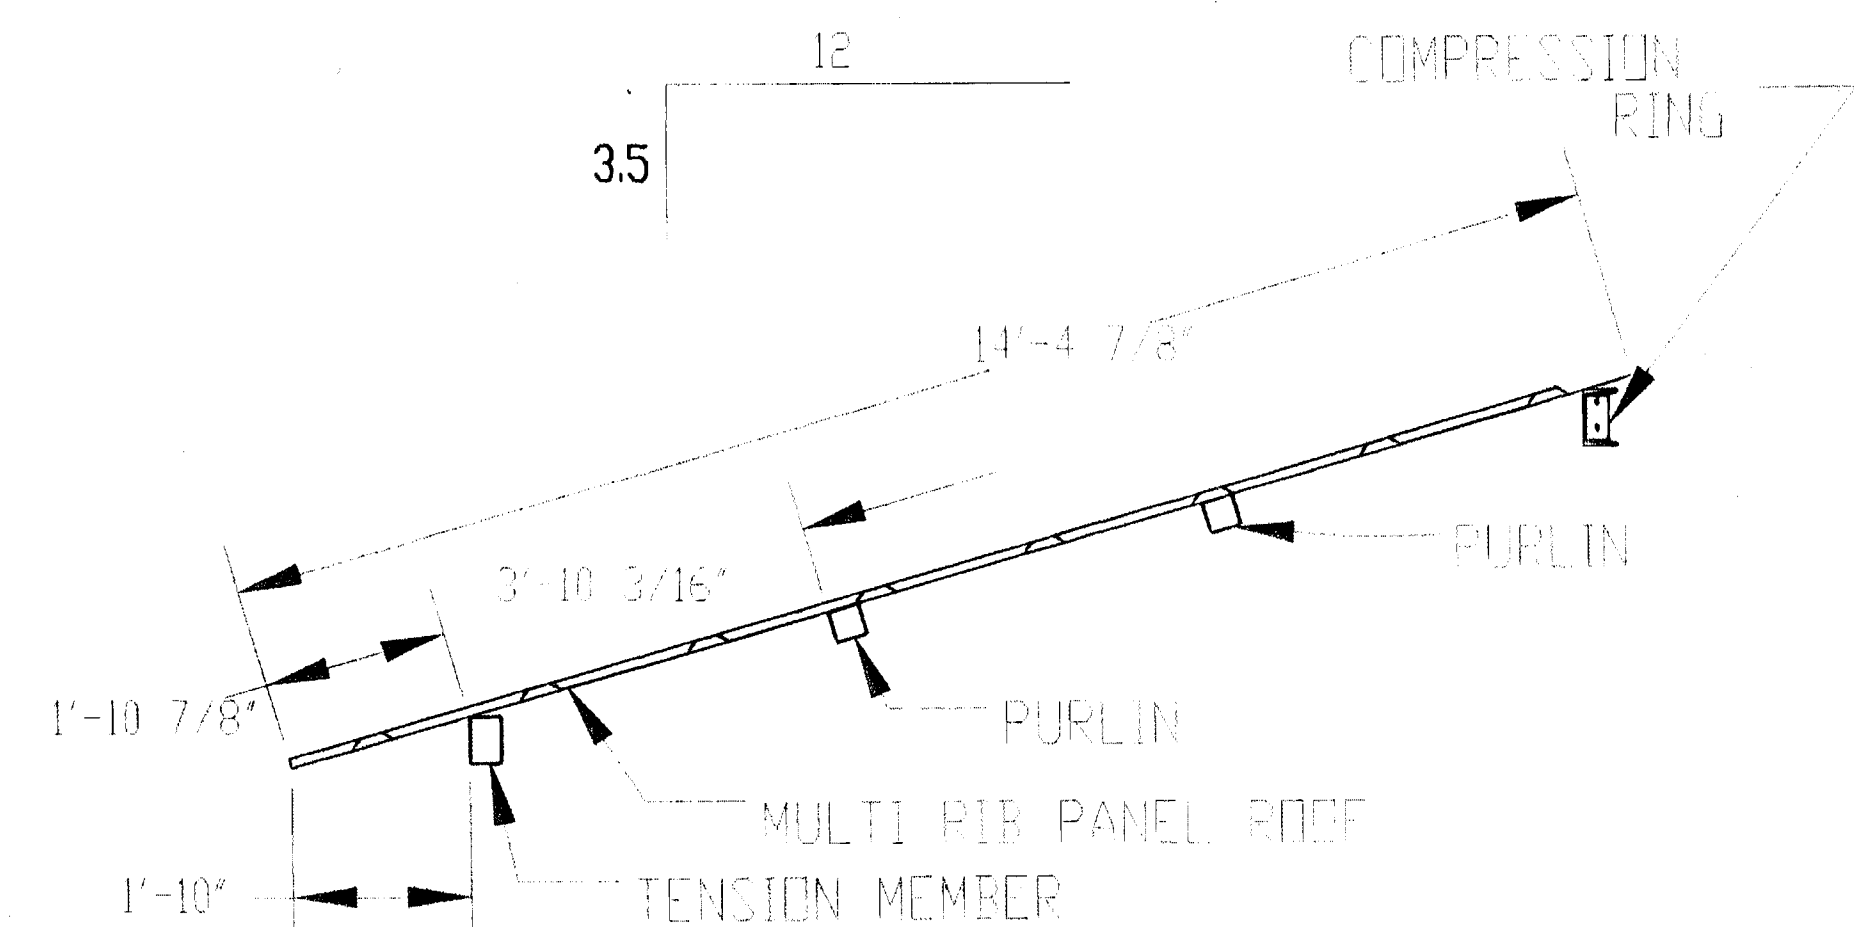

Fastener Schedule
N.T.S.

FASTENER SCHEDULE @ TRUSSES, RIDGES AND PURLINS.

FASTENER SCHEDULE @ EAVE.

THIS SEAL PERTAINS ONLY TO THE MATERIALS SUPPLIED BY POLYGON.
THIS SEAL DOES NOT SERVE AS - OR REPRESENT - THE PROJECT
ENGINEER OF RECORD AND SHALL NOT BE CONSTRUED AS SUCH.