

GENERAL NOTES:


DESIGN SPECIFICATIONS: AASHTO STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES, 1996, WITH 1997 INTERIMS

CONSTRUCTION SPECIFICATIONS: UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OFF-SITE IMPROVEMENTS, CLARK COUNTY, NEVADA 1986 EDITION

DESIGN METHOD: LOAD FACTOR DESIGN

CONCRETE: CLASS DA MODIFIED, MAJOR $f'_c=3,500$ psi
CEMENT - ASTM C150, TYPE V

REINFORCING STEEL: ASTM A615 $f_y=60,000$ psi

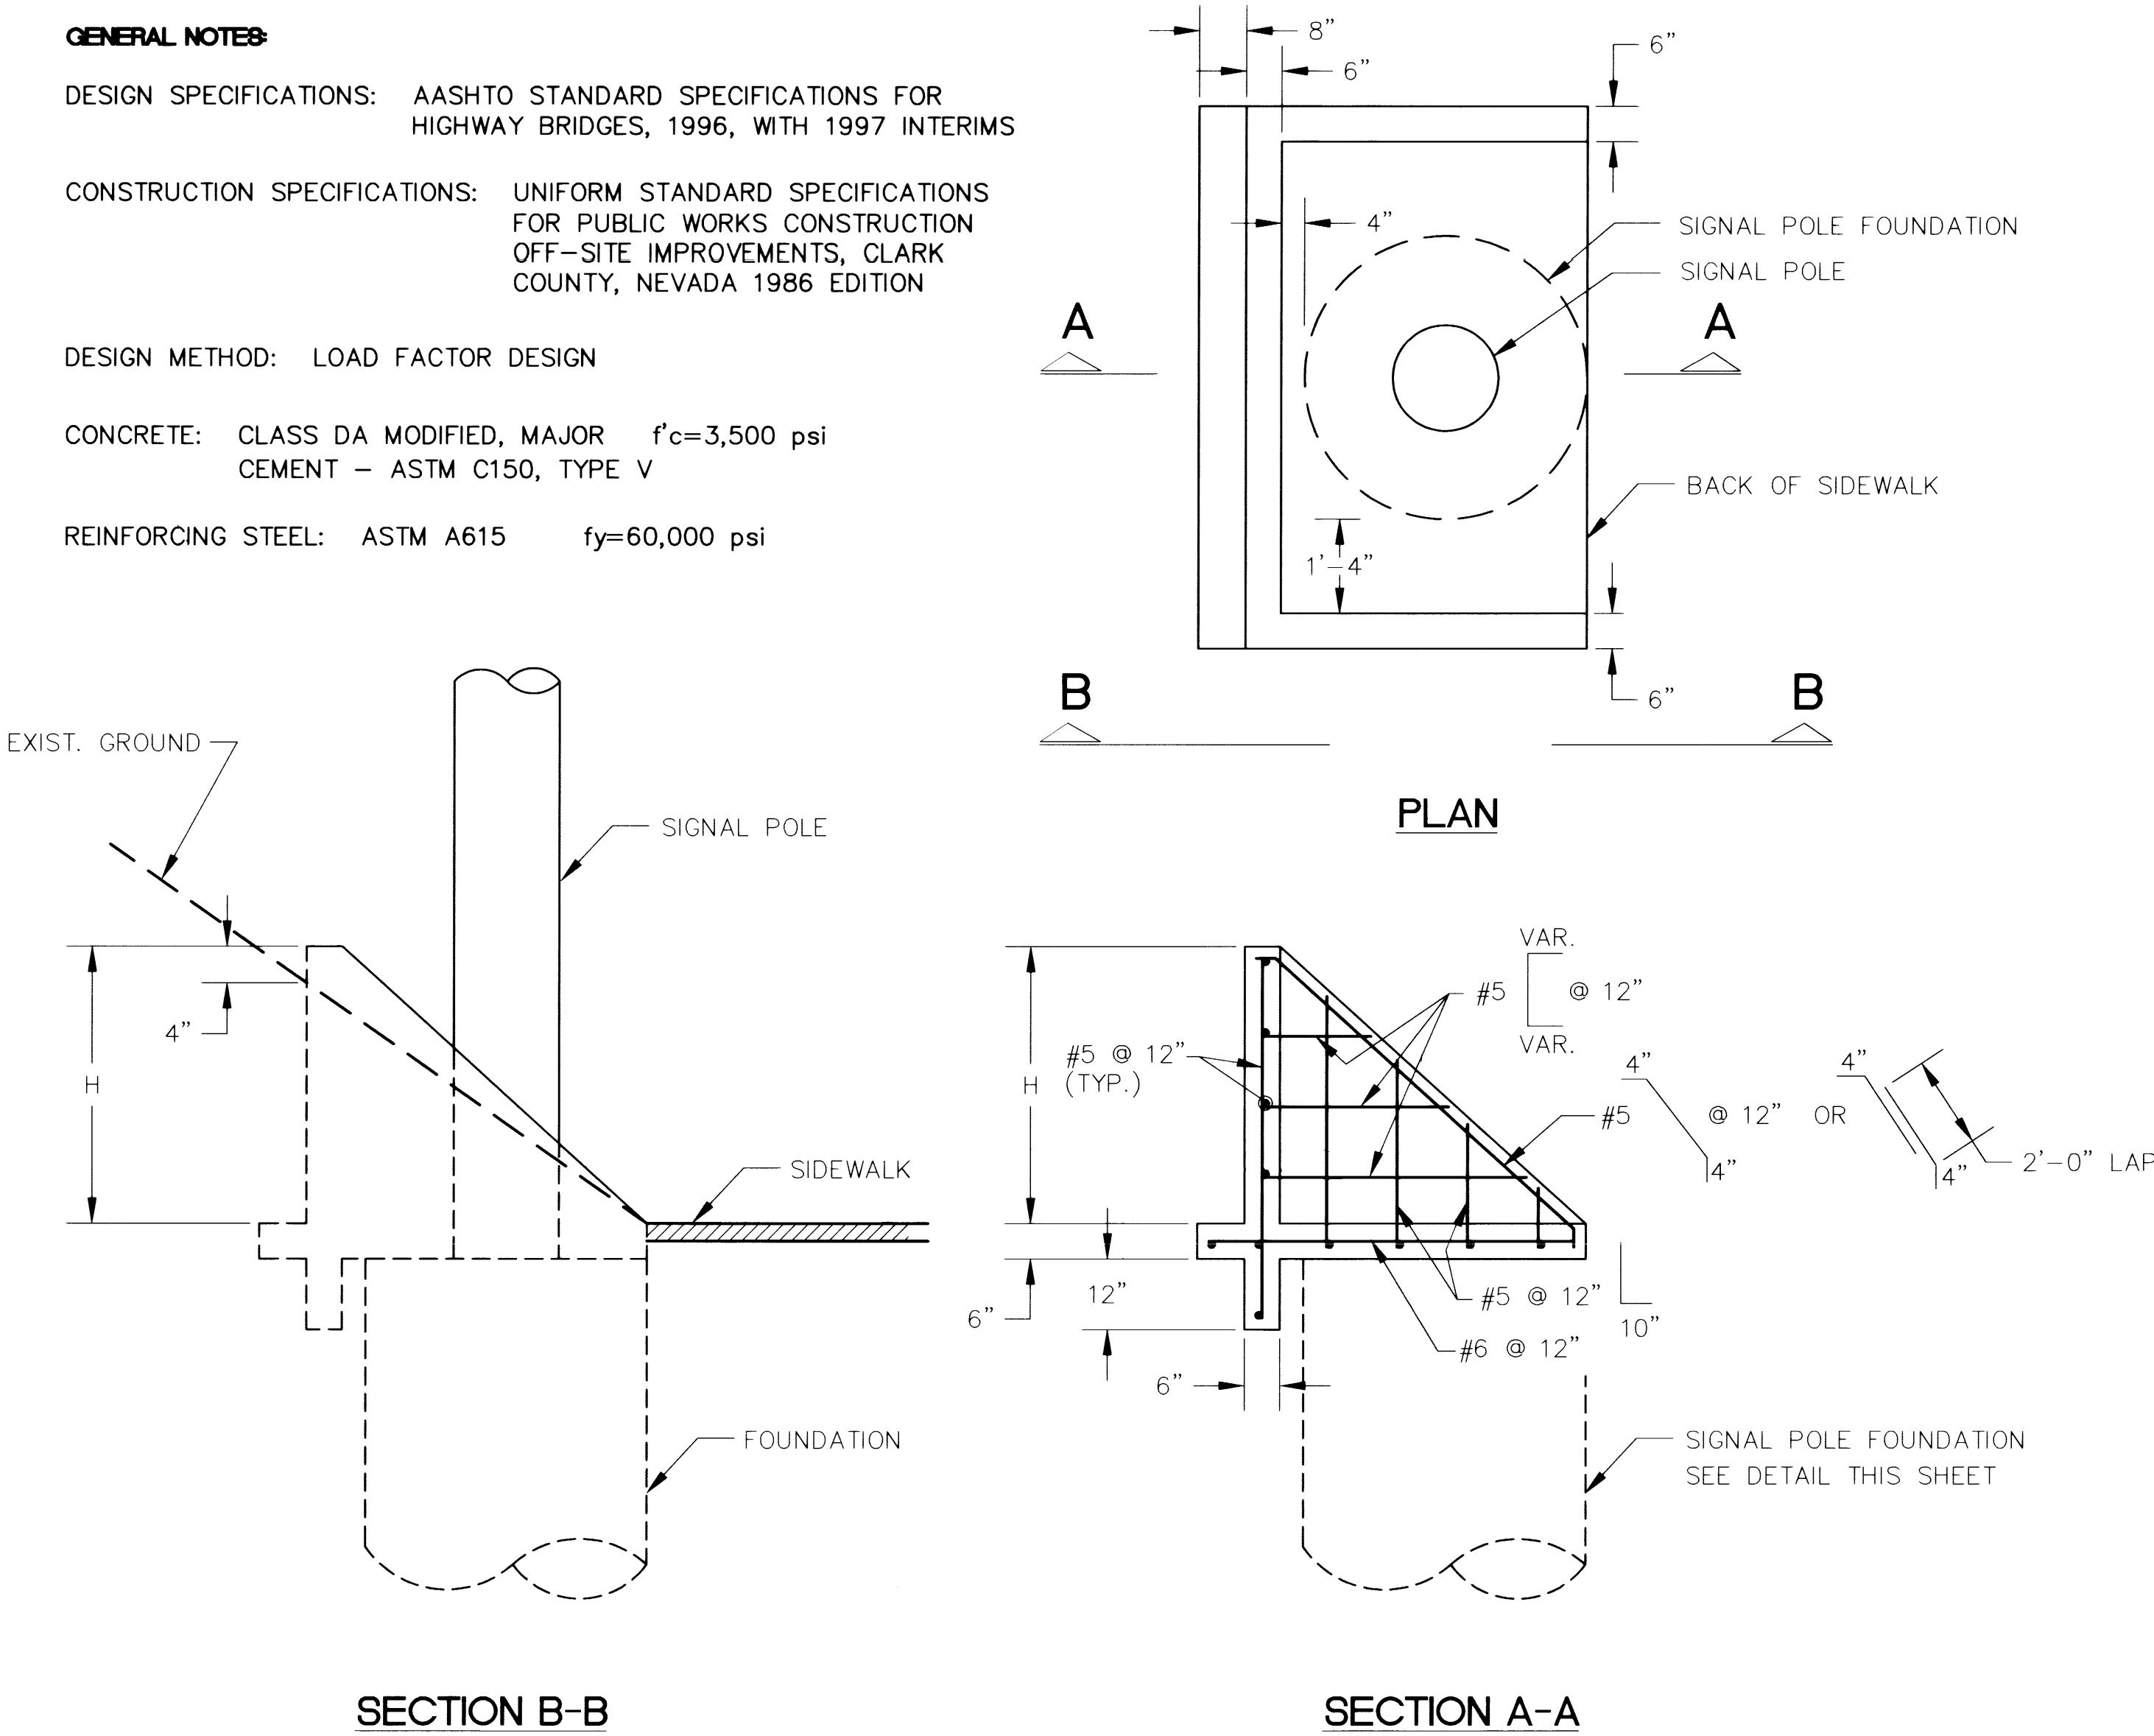

RETAINING WALL DETAIL

N.T.S

NOTES: ALL REINFORCING TO BE CENTERED IN WALLS AND FOOTING.
H = WALL HEIGHT TO BE 4" ABOVE EXISTING GROUND LINE AT BACKFACE OF WALL.

RETAINING WALL SCHEDULE

INTERSECTION	POLE LOCATION	APPROXIMATE HEIGHT
FORT APACHE LAKE NORTH	POLE A	18"
FORT APACHE LAKE NORTH	POLE D	16"
FORT APACHE MARINER COVE	POLE A	28"
FORT APACHE MARINER COVE	POLE C	22"
FORT APACHE MARINER COVE	POLE D	20"
FORT APACHE LAKE SOUTH	POLE A	18"
FORT APACHE LAKE SOUTH	POLE D	20"
FORT APACHE DESERT INN	POLE A	12"
FORT APACHE DESERT INN	POLE B	18"

PROJECT: SIGNALIZATION PLANS
BID NO. 99.1730.41

DESCRIPTION: RETAINING WALL DETAILS
AND SCHEDULE

PLANS NO. 107-V2944
SHEET 11 OF 11

DESIGNED: JSR/KJL
DRAWN: CDA
CHECKED: PDK
JOB No: FTO64273
VERT: NONE
DATE: 8/11/98

DESIGNED: JSR/KJL
DRAWN: CDA
CHECKED: PDK
JOB No: FTO64273
VERT: NONE
DATE: 8/11/98

PARSONS
TRANSPORTATION
GROUP

3075 E. Flamingo Rd., Ste 116
Las Vegas, NV 89121
(702) 435-2116
Fax (702) 435-8412

REVISIONS

No.	Date	Revisions
1	2/17/98	REVISIONS PER ADDENDUM 2

ENGINEER, STATE OF NEVADA

2-17-98

107-V2944

11

