



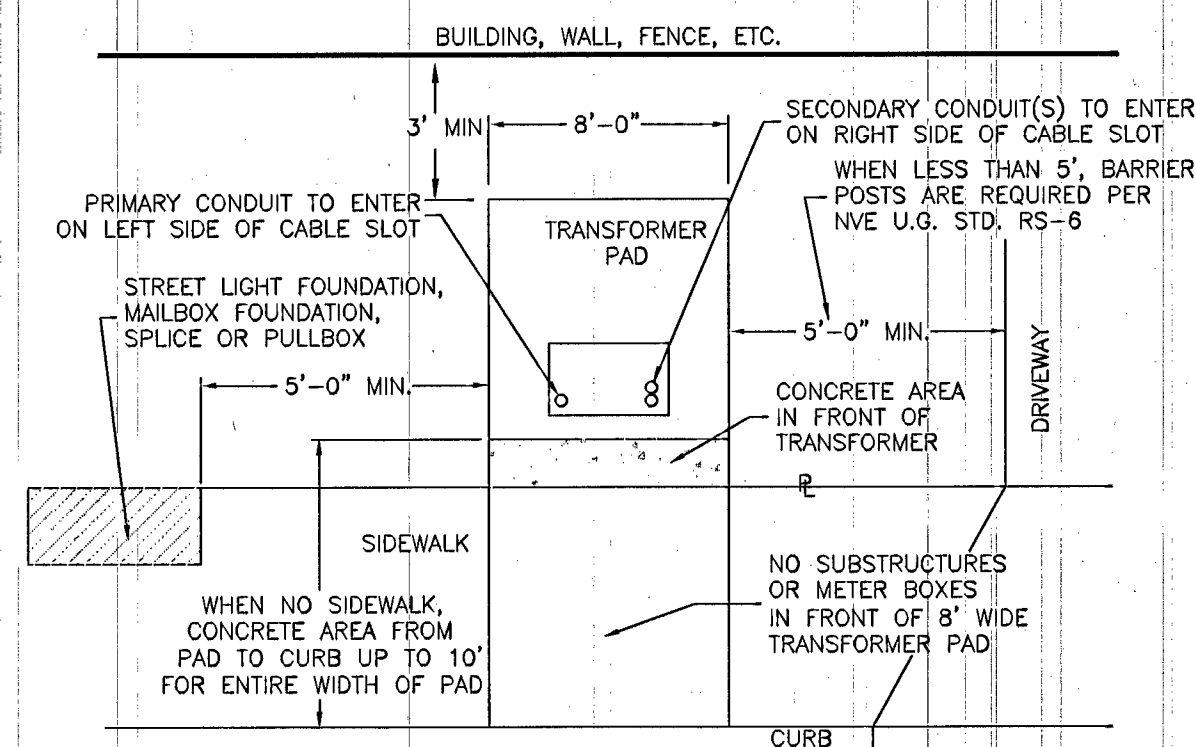

NVE U.G. STD. RS-5 & RS-35 OR RS-37

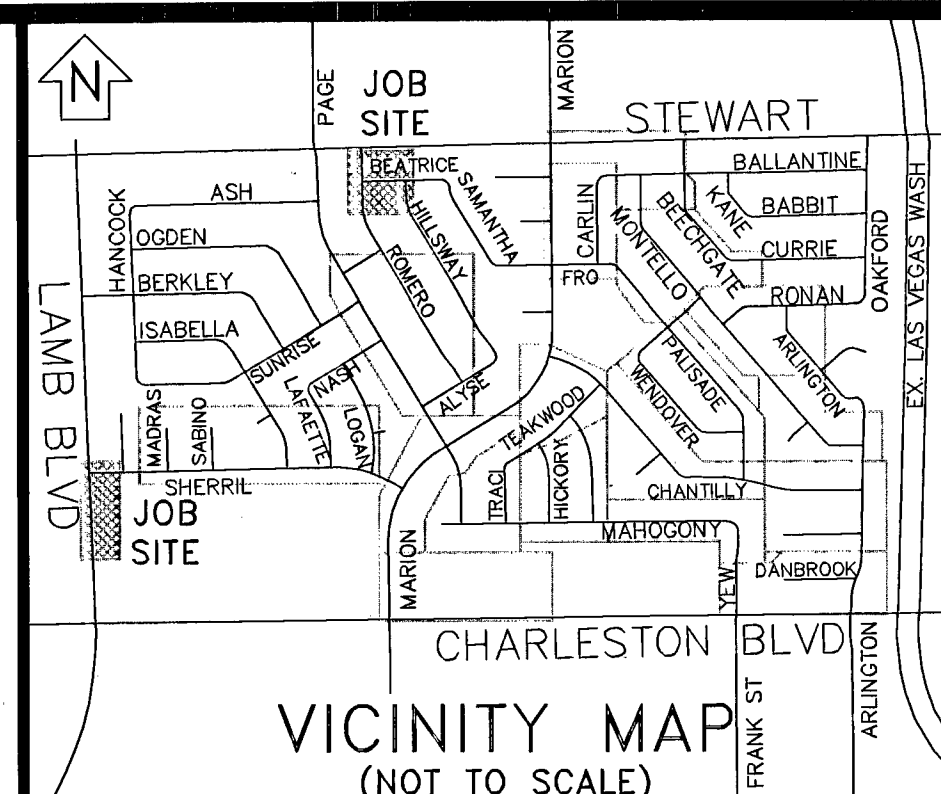

AVOID HITTING OVERHEAD POWER LINES. IT'S COSTLY. **Call before you Dig**
Avoid cutting underground utility lines. It's costly.

CALL BEFORE
YOU DO
OVERHEAD



CALL 1-702-402-2929

Call
811

REVISIONS

TYPE OF EASEMENT:		JPA NOTES:	
AERIAL	☐	EMBARQ CONTACT: D. SCHERER	
STANDARD	☐	PHONE NUMBER: 244-8071	
R/W-31	☐	DATE OF CONTACT: 06/22/2010	
UNDERGROUND	☐	TO SET NEW TO STAKE NEW POLES	
AS BUILT UNDERGROUND	☐	TO PROVIDE POLE	
R.O.E./R/W-5-COM	☐	FT. CLASS	
3rd PARTY	☐	FT. CLASS	
UNDERGROUND BY EXHIBIT	☐	FT. CLASS	
(N-DOT) PERMIT	☐	DIG POLE HOLES	
(BLM) PERMIT	☐	TO REMOVE EX. POLES	
RAILROAD-UPRR-PERMIT	☐	REM/REPLACE 10 RISERS ON:	
SO. NEVADA WATER PERMIT	☐	P63421,P65860,P67422,P7077	
NOT REQUIRED	☐	JPA#:	P201000609
Misc. Info.	☐		

NVE INFORMATION:

DESIGNER: R.OROZCO/ T. FOWLER
DCA: _____

CUSTOMER INFORMATION:

CONTACT: RICHARD GRIFFITH 402-6528
APPROVAL DATE: 08/03/2010

FOR EACH SERVICE POINT (POINT OF DELIVERY), ENERGY FOR EACH TENANT SPACE WILL BE MEASURED THROUGH ONE WATTHOUR METER. ENERGY FOR ALL NON-TENANT SPACE WILL BE MEASURED THROUGH ONE WATTHOUR METER. CONTACT NVE METER OPERATIONS FOR MULTIPLE RATE CLASS INSTALLATIONS


STEWART CABLE
REPLACEMENT PHASE B

NOTE: ALL ABOVE GROUND
UTILITY APPURTENANCES SHALL
CONFORM TO THE REQUIREMENTS
OF TITLE 19.12.040

NOTE: ALL CONDUIT PERPENDICULAR CROSSINGS UNDER CROSS GUTTER, CURB & GUTTER ARE BORE UNDER. ALL CONDUIT INSTALLATIONS UNDER AC PAVEMENT & SIDEWALK ARE BY TRENCH BACKFILL PER USDCCA SECTION 500 AND 200 STANDARD DRAWINGS.

CONTACT CLV LAND DEVELOPMENT (229-6371)
CLV CONSTRUCTION SERVICES MUST BE
NOTIFIED 24 HOURS PRIOR TO COMMENCING
CONSTRUCTION (229-6337)

*NVE INSPECTOR MUST BE NOTIFIED BY
FAX 48 HOURS PRIOR TO COMMENCING
CONSTRUCTION & WILL VERIFY CITY PERMIT
FOR WORK DONE IN STREETS OR SIDEWALK.
FAX PERMIT TO:
LAS VEGAS NORTH (RYAN CENTER): 402-4354
LAS VEGAS SOUTH (BELTWAY CENTER): 402-688

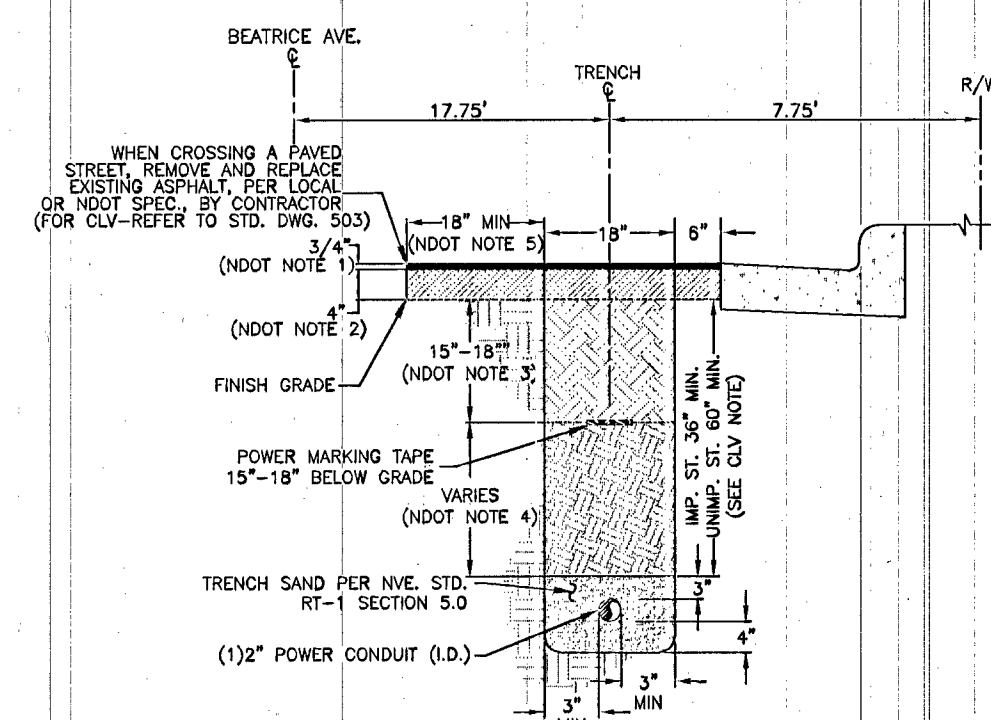

VUE REQUIREMENTS:

FOR ALL OTHER JURISDICTIONS REFER TO VUE STANDARDS.

DROVEITL REQUIREMENTS: NWE, STD, RT-5.

IMPROVED AREA (NIMP, ST-5): LOCATION OF TRENCH

UNIMPROVED AREA (UNIMP, ST-5): LOCATION OF TRENCH

EXISTING PERMANENT PAVEMENT WITH CURB & GUTTER AND/OR ADJACENT SIDEWALK SHALL BE MAINTAINED.

WITHIN AN IMPROVED TRAIL AREA,

CONSTRUCTION SHALL BE DONE CONCURRENT WITH A PRIVATE OR PUBLIC PROJECT.

UNIMPROVED AREA (UNIMP, ST-5): LOCATION OF TRENCH

ANY OTHER ACTION THAT MEET THE IMPROVED AREA CRITERIA(S) WILL BE CONSIDERED AN UNIMPROVED AREA.

UNIMPROVED AREA (UNIMP, ST-5) WITHIN TWO EIGHT-FEET-TAY ONLY

1. V/A HIGH OPEN-DRAIN;

2. EXISTING DRAINAGE GRADE OR MATCH EXISTING, WHICHEVER IS GREATER;

3. BASE AGGREGATE (AS PER NDOT SPECIFICATIONS; SECTION 704), A MINIMUM OF 6 INCHES TO BE LAID IN MAXIMUM 8 INCH LOOSE LAYS; 95% COMPACTION REQUIRED FOR EACH LAYER;

4. FINISH AGGREGATE (AS PER NDOT SPECIFICATIONS; SECTION 707), 90% COMPACTION REQUIRED.

NOT REQUIREMENTS.

FOR ALL OTHER JURISDICTIONS REFER TO THE STANDARDS.
HOSPITAL REQUIREMENTS N.E.D., DIST. RT-6.
TRENCH DEPTH REQUIREMENTS N.E.D., DIST. RT-6.
TRENCH DEPTHS SHALL BE 48 INCHES FOR TRENCHES OF UP TO 10' AS TABS UNITS ONLY.
IMPROVED AREA (IMP. ST.) (LOCATION OF TRENCH)
TRENCHES WILL BE CONSIDERED IMPROVED IF IT MEETS ONE OR MORE OF THE FOLLOWING CRITERIA:
- EXISTING PERMANENT PAVEMENT WITH CURBS & GUTTER AND/OR ADJACENT SIDEWALK
- IMPROVEMENTS TO EXISTING PAVEMENT
- PRODUCT AN IMPROVED TRAIL AREA
- IMPROVEMENTS TO EXISTING PAVEMENT CONCURRENT WITH A PRIVATE OR PUBLIC PROJECT

UNIMPROVED AREA (UNIMP. ST.) (LOCATION OF TRENCH)
ANY OF THE SCENARIOS THAT FAILS TO MEET THE IMPROVED AREA CRITERIA(S) WILL BE CONSIDERED AN UNIMPROVED AREA.
UNIMPROVED AREAS SHALL BE AT LEAST WITHIN TWO NIGHT-OF-WAY LIMITS.

1. 3/4 INCH OPEN-COURSE
2. 3/4 INCH OPEN-COURSE OR GRADE OR UNPAVED EXISTENCE, WHICHEVER IS GREATER
3. BASE AGGREGATE (AS PER NOCTON SPECIFICATIONS; SECTION 704), A MINIMUM OF INCHES TO BE PLACED OVER THE BASE AGGREGATE LAYER
4. 3/4 INCH OPEN-COURSE OR GRADE OR UNPAVED EXISTENCE, WHICHEVER IS GREATER
5. 3/4 INCH OPEN-COURSE OR GRADE OR UNPAVED EXISTENCE, WHICHEVER IS GREATER
SPECIFICATIONS SECTION 207. 90% COMPACTION REQUIRED.
SPECIFICATIONS SECTION 207. 90% COMPACTION REQUIRED.

[illegible]

TRENCH DETAIL
1-2" CONDUITS
DETAIL " " "

Sharing of this drawing and the information contained herein shall be only to individuals/parties who have entered into an agreement with Applicant for the completion of work associated with this specific project. Use for purposes other than this specific project requires the written consent of NV Energy.