

Key Notes


1. CMU Column, see detail 4/LD1
2. Steel header, see Summerlin Standard Details.
3. Planting area, see planting plan
4. Turf, see planting plan
5. Edge of pool decking, see Architectural sheets.
6. Broken cobble swale, see Civil sheets.
7. View fence, see detail 3/LD1
8. 1/2" tooled score joint/expansion joint.
9. 4" thick natural color concrete paving over 4" type 2 aggregate and 95% compacted sub grade, as per Summerlin standards. Score and expansion joints as per on plan.
10. Concrete walk to intrude into ramada pad even with score joints as shown on plan.
11. 4" integral color concrete with exposed aggregate finish over 4" type 2 aggregate base and 95% compacted sub grade, as per Summerlin Standards. Exposed aggregate to be double seeded. Integral color to be desert gold. Submit 2"x2" sample for approval. Aggregate to be sealed after installation.
12. Exposed aggregate walk to intrude into circular walk as shown on plans.
13. Emergency exit gate see Architectural for panic hardware.
14. Self closing, self latching pool gate see Architectural plans for panic hardware, see detail 8/LD1.
15. Site wall. Wall to extend past point of connection with view fence approx. 18" as shown on plans. See detail 2/LD1.
16. Seat wall, see detail 10/LD1.
17. Score lines to line up with edge of columns.
18. Light bollard see electrical plans.
19. Asphalt paving, see Civil plans.
20. Handicap ramp, see Civil sheets.
21. Retaining view fence see detail 5/LD2.
22. Retaining CMU column see detail 2/LD2.
23. Retaining wall see detail 4/LD2.
24. Concrete stairs see detail 7/LD2.

PLANS APPROVED
ARCHITECTURAL
Building & Safety Dept.
City of Las Vegas, Nevada

JCC JUL 31 2000

Does Not Include Structural, Electrical,
Plumbing/Mechanical or On-Site
Improvements Make No Change
Without Approval Sign Is
Not a Permit to Violate Any Ordinance

ONE HOUR
FIRE - RESISTIVE
CONSTRUCTION
THROUGHOUT

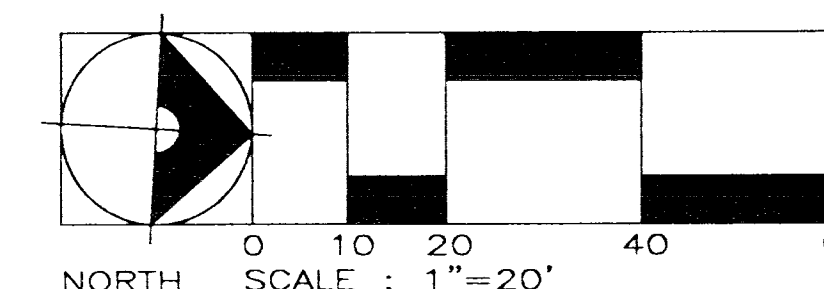

Call before you dig.
1-800-227-2600

CALL BEFORE YOU DIG
CALL 1-702-593-6111

