
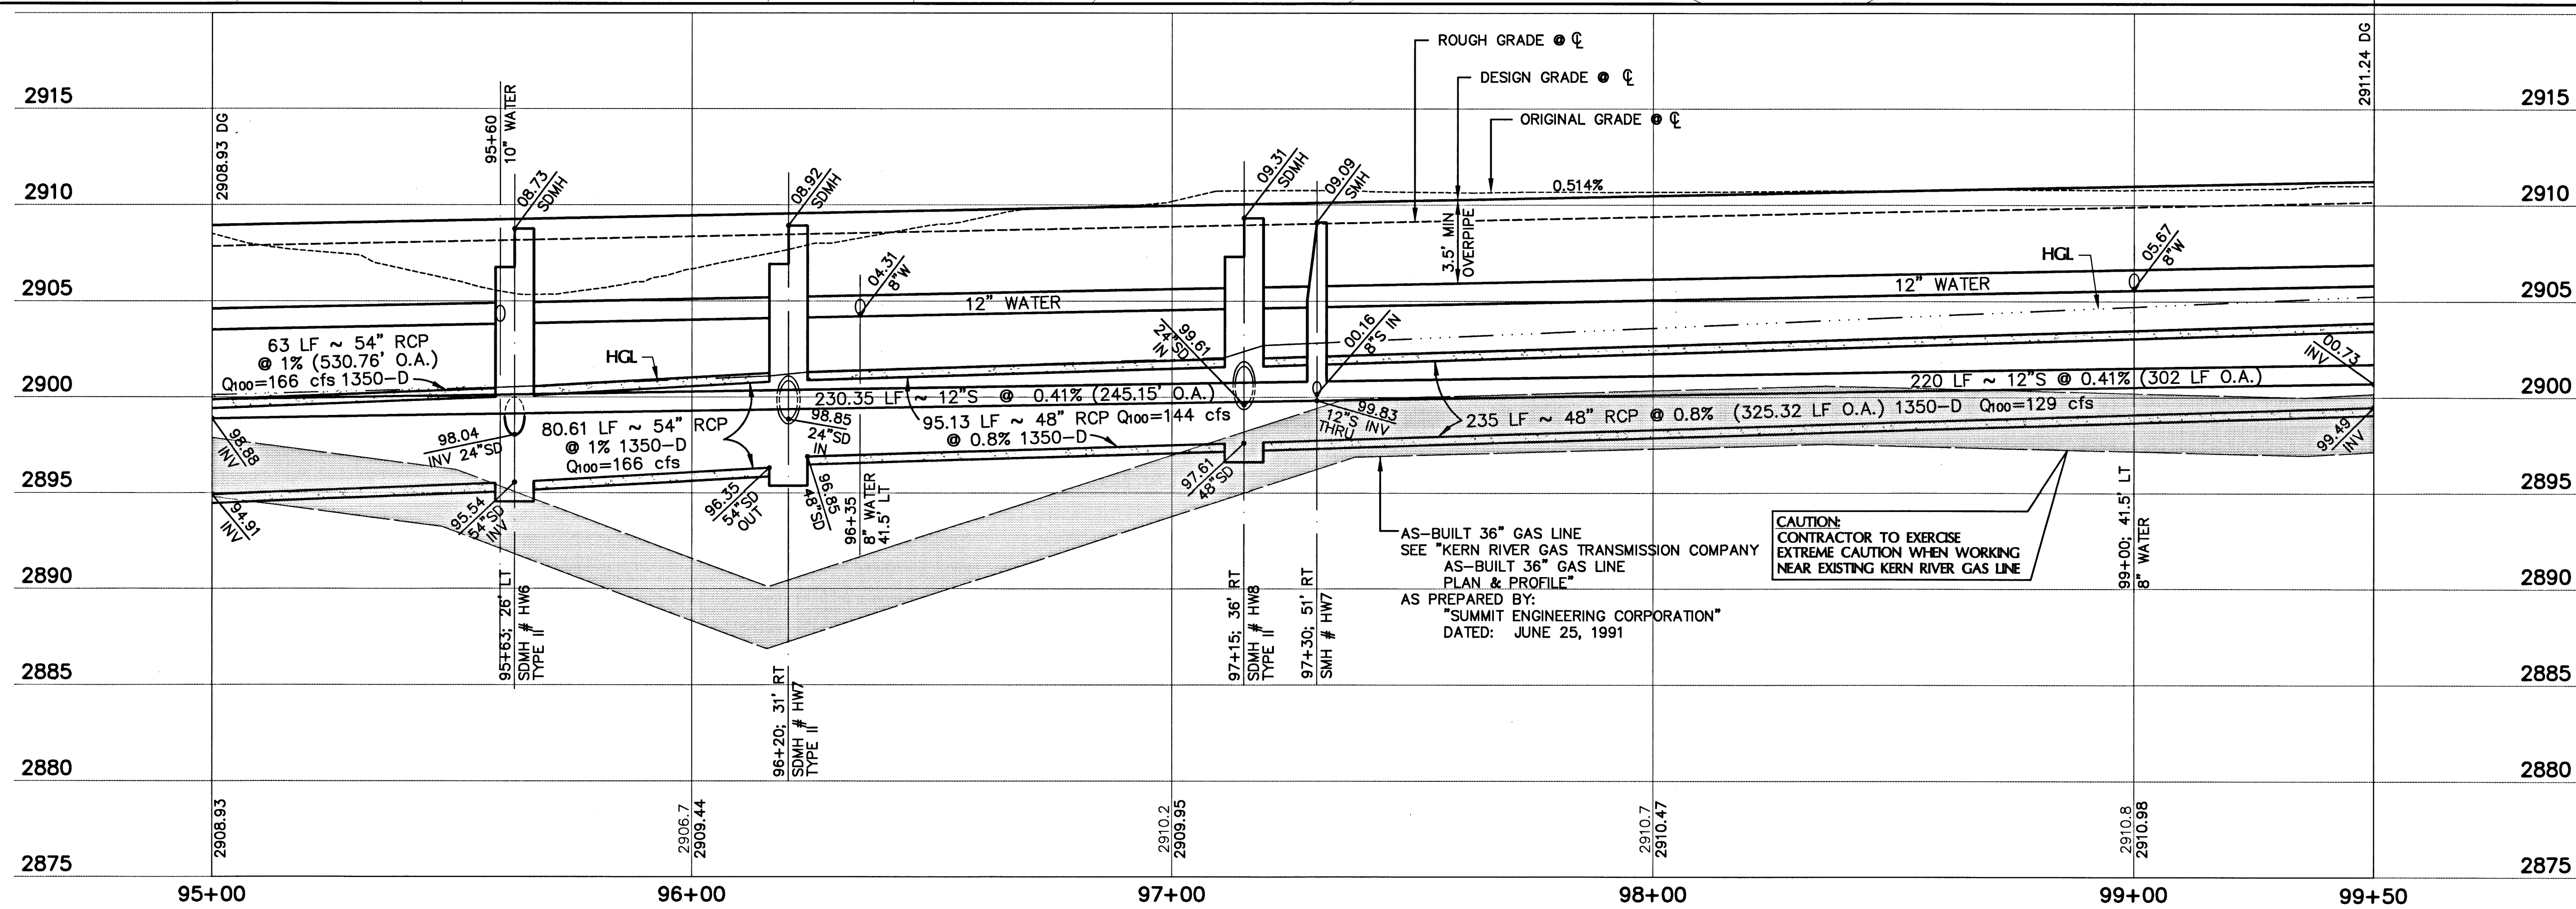


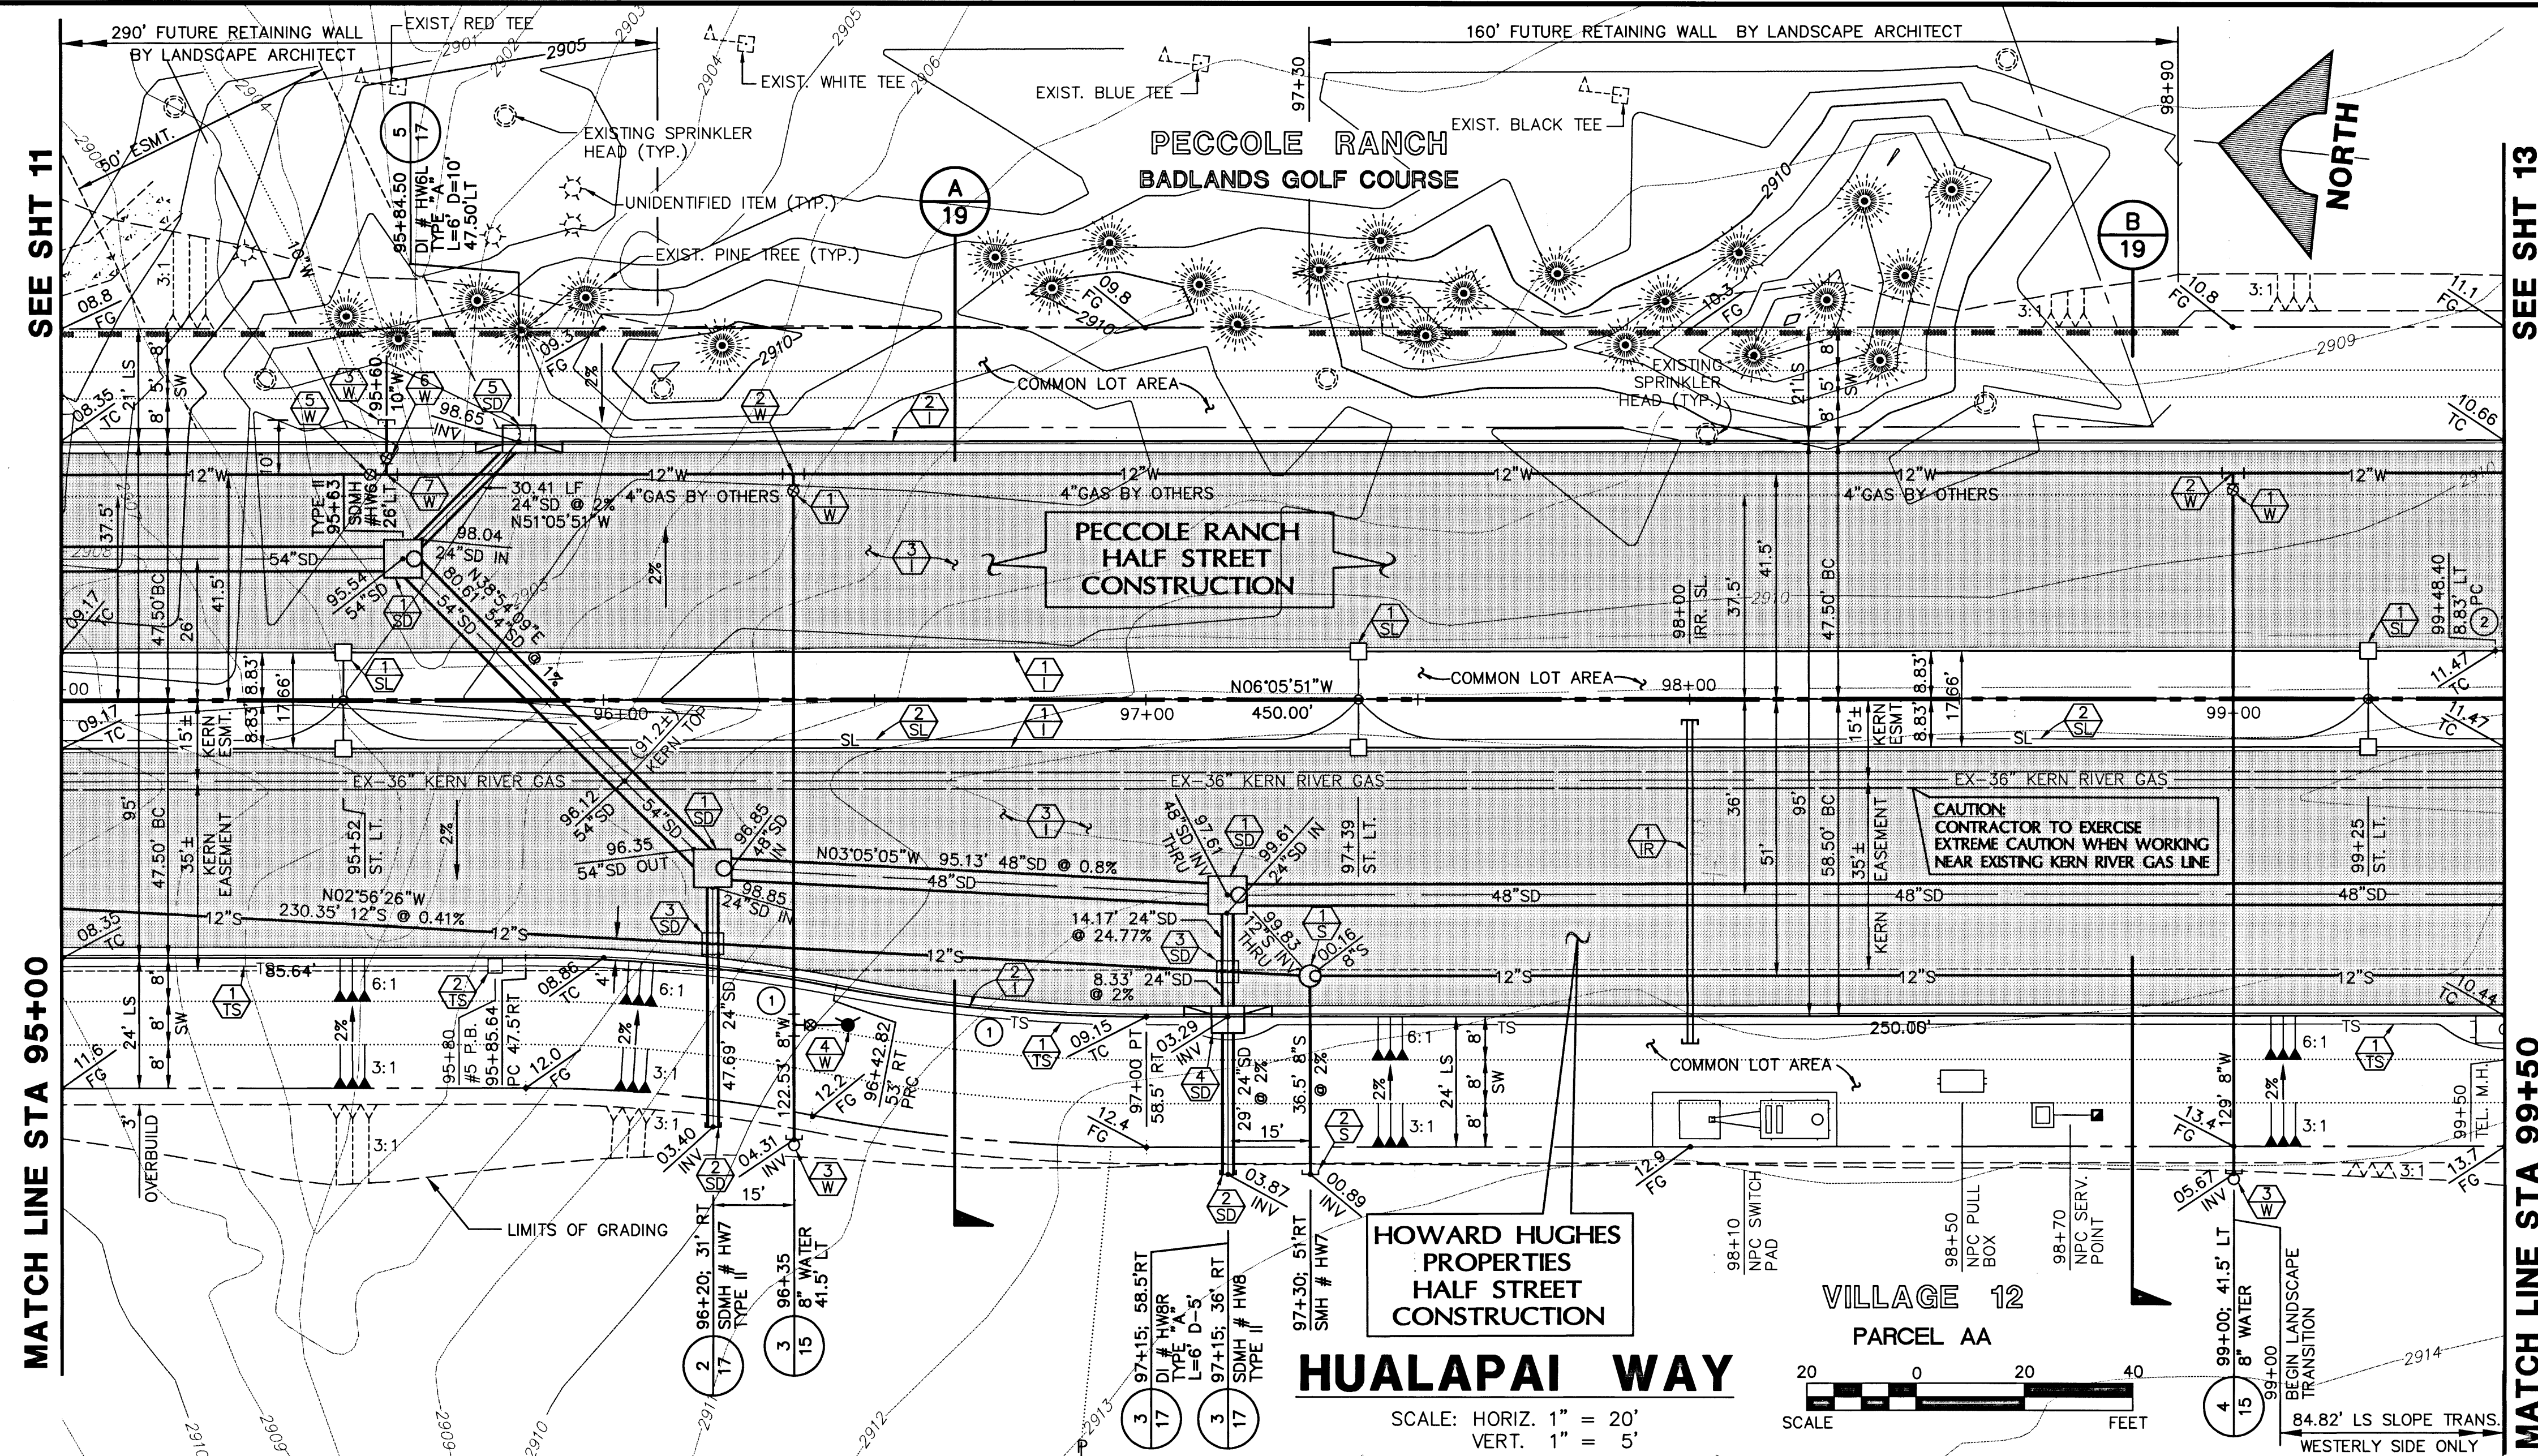

CURVE DATA				
				1 INDICATES CURVE NUMBER
CURVE	DELTA	RADIUS	LENGTH	TANGENT
1	10°59'17"	300.00'	57.53'	28.86'
2	00°36'35"	150.00'	1.60'	0.80'

CONSTRUCTION NOTES

IMPROVEMENTS

- 1 INSTALL "A" TYPE CURB 
- 2 INSTALL "L" TYPE CURB & GUTTER 
- 3 INSTALL AC PAVEMENT PER SECTION SHT. 19

WATER

- | | | |
|--------|---|-----------|
| 1
W | INSTALL 8" GATE VALVE & BOX | U-34
S |
| 2
W | INSTALL 12" X 12" X 8" TEE | |
| 3
W | INSTALL TEMP. PLUG & CAP W/2" BLOW-OFF ASSEMBLY | |
| 4
W | INSTALL FIRE HYDRANT ASSEMBLY | U-33
S |
| 5
W | INSTALL 12" GATE VALVE & BOX | U-34
S |
| 6
W | INSTALL 10" GATE VALVE & BOX | U-34
S |
| 7
W | INSTALL 12" X 12" X 10" TEE | |

STORM DRAIN

- | | | |
|---|-------------------------------------|---|
|  | INSTALL TYPE II STORM DRAIN MANHOLE |  |
|  | INSTALL TEMPORARY PLUG | |
|  | INSTALL CONCRETE COLLAR |  |
|  | INSTALL TYPE "A" DROP INLET |  |
|  | INSTALL TYPE "A" DROP INLET |  |

SEWER

- 1
S INSTALL 48" DIA. SEWER MANHOLE
- 2
S INSTALL TEMPORARY PLUG

STREET LIGHTING

-  STREET LIGHT, SEE ELECTRICAL PLAN 
-  STREET LIGHT OR COMMON TRENCH, SEE ELECTRICAL PLAN


TRAFFIC

- 1
TS INSTALL 3" INTERCONNECT CONDUIT, CO-LOCATE WITH
CENTRAL TELEPHONE CONDUIT
- 2
TS INSTALL NO. 5 PULLBOX (E-32
S)

IRRIGATION

- BANK "B"; (2) 4" SDR35 PVC

NOTE:
ALL COMMON LOTS AS SHOWN HEREIN TO BE PRIVATELY
MAINTAINED BY THE H.O.A.

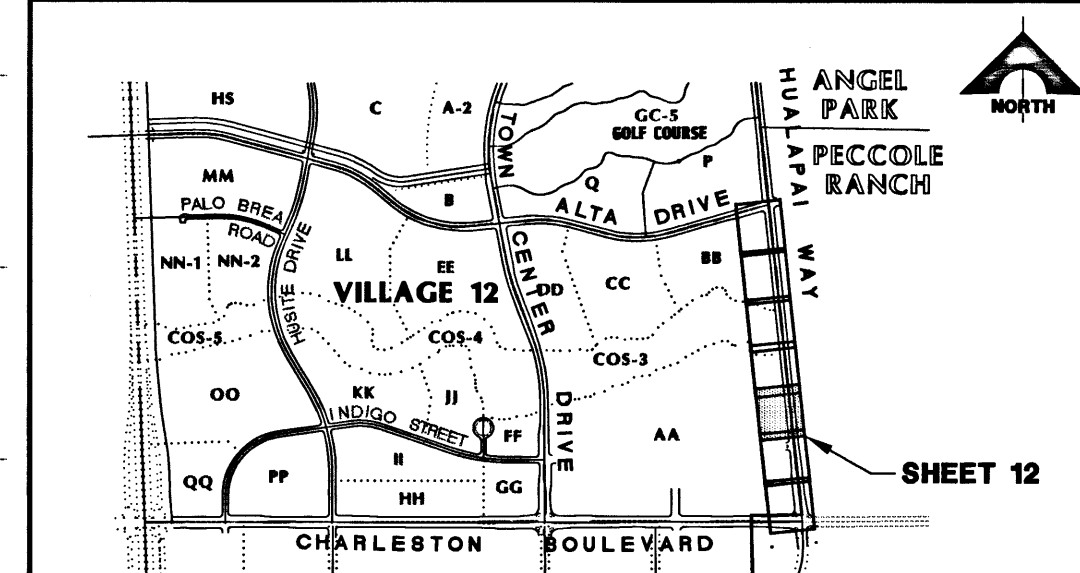

APPROVAL:

LAS VEGAS VALLEY WATER DISTRICT

4/18/96
DATE

	SHEET
--	-------

12

SHT 12 OF 20

07-V2542

G.C. WALLACE, INC.
Engineering/Architecture

**SUMMERLIN
22 HUALAPAI WAY IMPROVEMENTS
PLAN & PROFILE
STA 95+00 TO 99+50**