


JOB NO. 62007.209

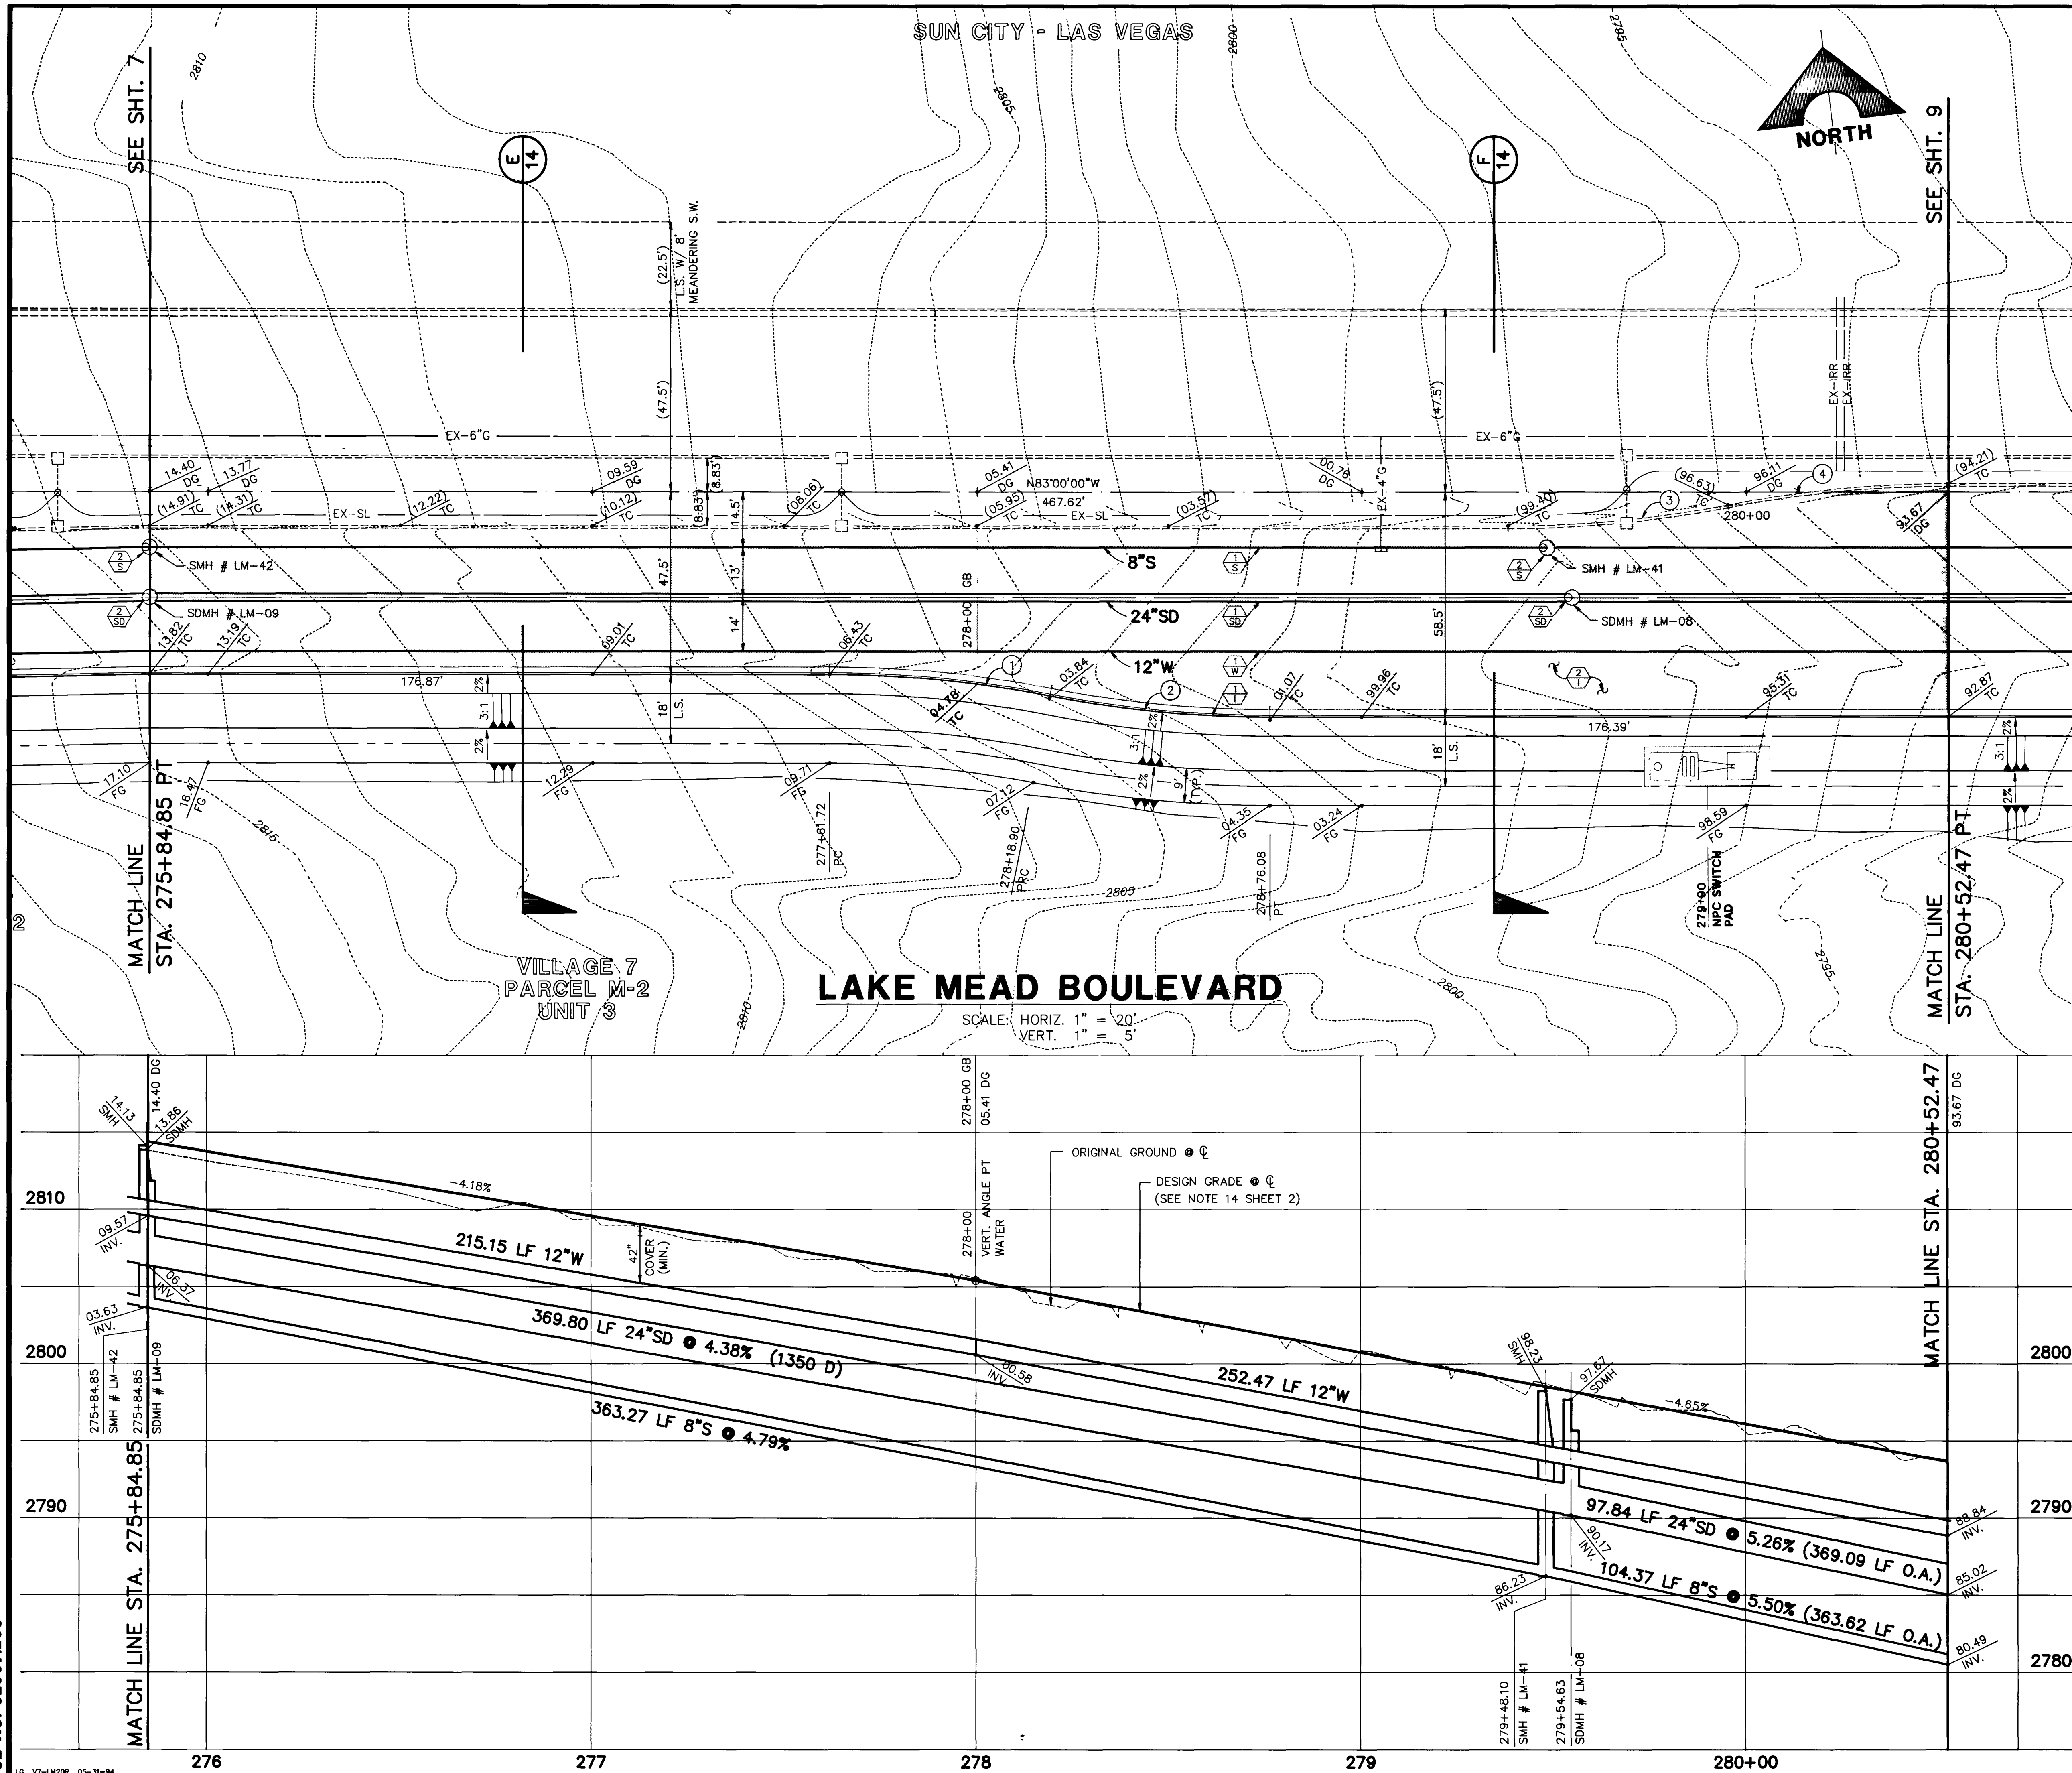

CURVE DATA ① INDICATES CURVE NUMBER

NO.	Δ	R	L	T	DESCRIPTION
1	10°59'17"	300.00	57.53	28.86	BC
2	10°59'17"	300.00	57.53	28.86	BC
3	10°59'17"	300.00	57.53	28.86	ISBC
4	10°59'17"	300.00	57.53	28.86	ISBC

BC = BACK OF CURB
ISBC = ISLAND BACK OF CURB


- CONSTRUCTION NOTES**
- IMPROVEMENTS**
- ① REMOVE AND REPLACE ISLAND CURB PER ENGINEER
 - ② INSTALL 468 LF OF "L" TYPE CURB & GUTTER (S-4) S
 - ③ INSTALL 2226 SY OF PAVEMENT PER SECTIONS SHEET 13

- SEWER**
- ① INSTALL 468 LF OF 8" SEWER PIPE
 - ② INSTALL 1 EA SEWER MANHOLE (SD-8) CLV

- WATER**
- ① INSTALL 468 LF OF 12" WATER PIPE

- STORM DRAIN**
- ① INSTALL 468 LF OF 24" STORM DRAIN PIPE
 - ② INSTALL 1 EA STORM DRAIN MANHOLE (SD-12) S

NOTE:
EXISTING UTILITIES TO BE VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION.

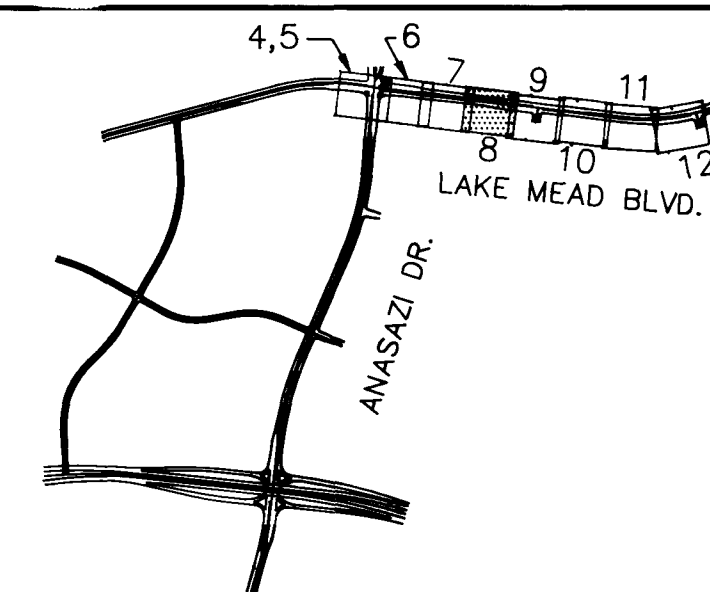

APPROVAL:
1st 11/11/93 6/09/94
LAS VEGAS VALLEY WATER DISTRICT
DATE 6/14/94

RECOMMENDED

G. C. WALLACE, INC.
Engineering/Architecture
1555 SOUTH RAINBOW BLVD., LAS VEGAS, NEVADA 89102

VILLAGE 7 - LAKE MEAD BOULEVARD
LAKE MEAD BOULEVARD
PLAN & PROFILE
STA. 275+84.85 TO 280+52.47

SHEET
8
SHT 8 OF 16

