

MATCHLINE - SEE SHT. C2.00

MATCHLINE - SEE SHT. C2.02

EXISTING SCHOOL BUS YARD BUILDING

NOTE:  
EXISTING SIGN TO BE RELOCATED PER SHEET C4.01.

NOTE:  
EXIST. VAULT & METER TO BE REMOVED & METERS RELOCATED SEE UTILITY PLANS FOR NEW METER LOCATION

DEMOLITION NOTES:

- REMOVE EXISTING ASPHALT CONCRETE PAVEMENT.
- REMOVE EXISTING CONCRETE SIDEWALK.
- 1 REMOVE EXISTING BUILDING AND/OR PARK STRUCTURE.
- 2 REMOVE EXISTING BALL FIELD.
- 3 REMOVE EXISTING PAVEMENT MARKING, PARKING SIGNS, BUMPERS, ETC.
- 4 REMOVE EXISTING CURB, CURB AND GUTTER (WHERE APPLICABLE).
- 5 REMOVE EXISTING PLAYGROUND AREA AND/OR PARK EQUIPMENT.
- 6 REMOVE EXISTING LANDSCAPE.
- 7 REMOVE AND/OR RELOCATE EXISTING SIGN.
- 8 REMOVE AND RETURN STREET/PARK LIGHT POLE/S TO CITY OF LAS VEGAS YARDS AT 3104 E. BONANZA ROAD. CALL 24 HOURS BEFORE RETURNING AT 229-6331.
- 9 REMOVE EXISTING BALL FIELD LIGHT AND RELOCATE PER ELECTRICAL PLANS.
- 10 EXISTING ELECTRICAL UTILITIES, SEE ELECTRICAL PLANS FOR WORK TO BE PERFORMED.
- 11 REMOVE EXISTING FENCE.
- 12 REMOVE EXISTING FLAG POLE.
- 13 REMOVE EXISTING DEPRESSED DRIVEWAY.
- 14 REMOVE EXISTING BOLLARD.
- 15 REMOVE EXISTING WALL.
- 16 REMOVE EXISTING STEPS.
- 17 ABANDON IN PLACE EXISTING SANITARY SEWER LINE OR MANHOLE, AND CAP AS SHOWN ON SHEET C5.02.
- 18 REMOVE AND RELOCATE EXISTING SCOREBOARD PER ELECTRICAL PLANS.
- 19 EXISTING OVERHEAD POWER POLE WITH GUY WIRES (WHERE APPLICABLE) TO BE REMOVED AND POWER RELOCATED UNDERGROUND BY OTHERS.

IMPORTANT NOTE TO CONTRACTOR:


IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO IDENTIFY ALL UNDERGROUND UTILITIES (KNOWN & UNKNOWN) PRIOR TO COMMENCEMENT OF DEMOLITION WORK.

DEMOLITION NOTE:

ALL EQUIPMENT NOT USED MUST BE RETURNED TO CLV.

NOTE:

REMOVE AND RELOCATE THE FOLLOWING ITEMS PER LANDSCAPE PLANS.  
THREE (3) EXISTING DRINKING FOUNTAINS  
FIVE (5) EXISTING BLEACHERS  
TWO (2) EXISTING FOUL POLES

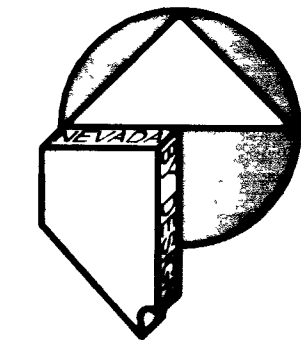

GRAPHIC SCALE  
( IN FEET )  
1 inch = 30 ft.

BENCHMARK

CLV BM 2LV0136W4: RIVET & PLATE IN TOP OF CURB, S.E. RETURN, STEWART AVENUE AND EASTERN AVENUE, ELEVATION: 1846.08' (NAVD88)

BASIS OF BEARING

S 44°48'20" E, BEING THE GRID BEARING BETWEEN CLARK COUNTY GIS CONTROL POINTS 816 AND 827, AS SHOWN ON A RECORD OF SURVEY IN FILE 88, PAGE 53 OF SURVEYS, OFFICIAL RECORDS, CLARK COUNTY, NEVADA.


SAFETY ALERT

Call Before You Overhead  
1-702-593-6111



Avoid cutting underground utility lines. It's costly.

Call before you Dig  
1-800-227-2600

| REVISIONS |             |      |    |
|-----------|-------------|------|----|
| REV       | DESCRIPTION | DATE | BY |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |

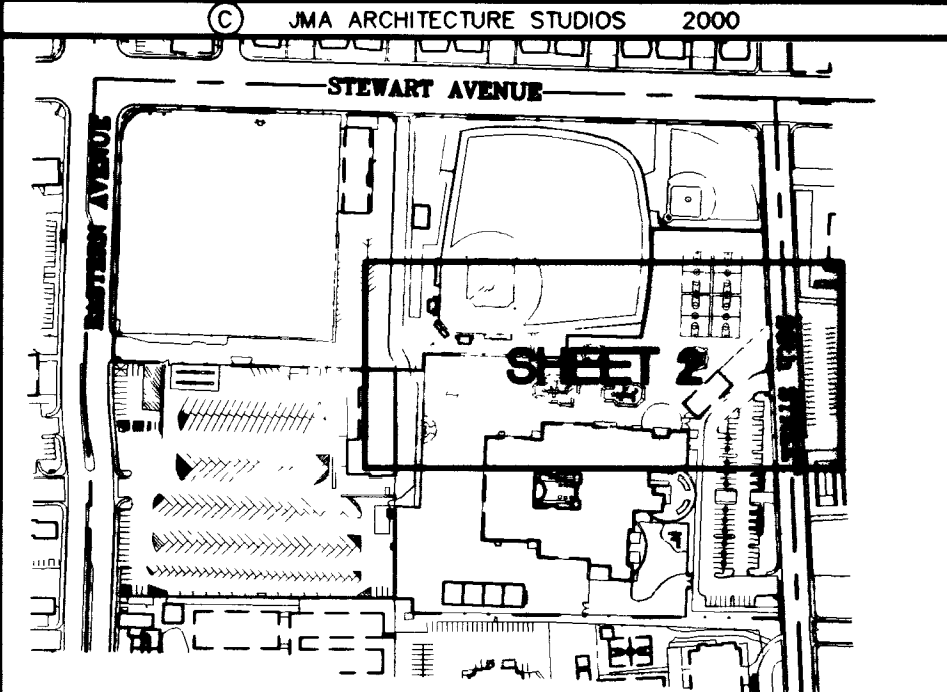

DO NOT SCALE DRAWINGS

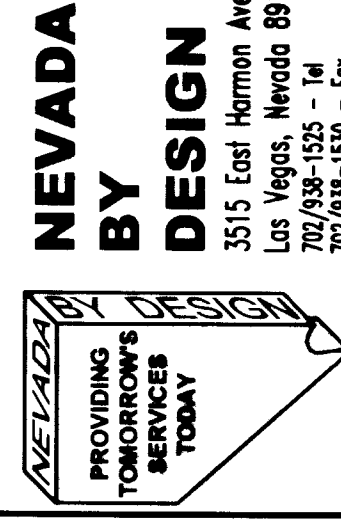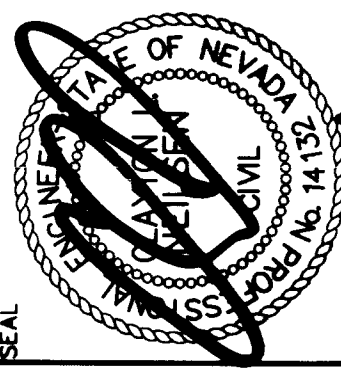

JMA ARCHITECTURE STUDIOS  
10110 CANTON CROSS DRIVE LAS VEGAS, NEVADA 89144 (702)761-2000

CLARK COUNTY SCHOOL DISTRICT  
CONSTRUCTION MANAGEMENT  
LAS VEGAS, NEVADA 89121  
4828 PEARL ST.

SUNRISE ACRES ELEMENTARY SCHOOL

DEMOLITION PLAN - SHEET 2

SHEET NO.  
**C2.01**  
SHEET 4 of 26  
DRAWING NUMBER  
715-134