



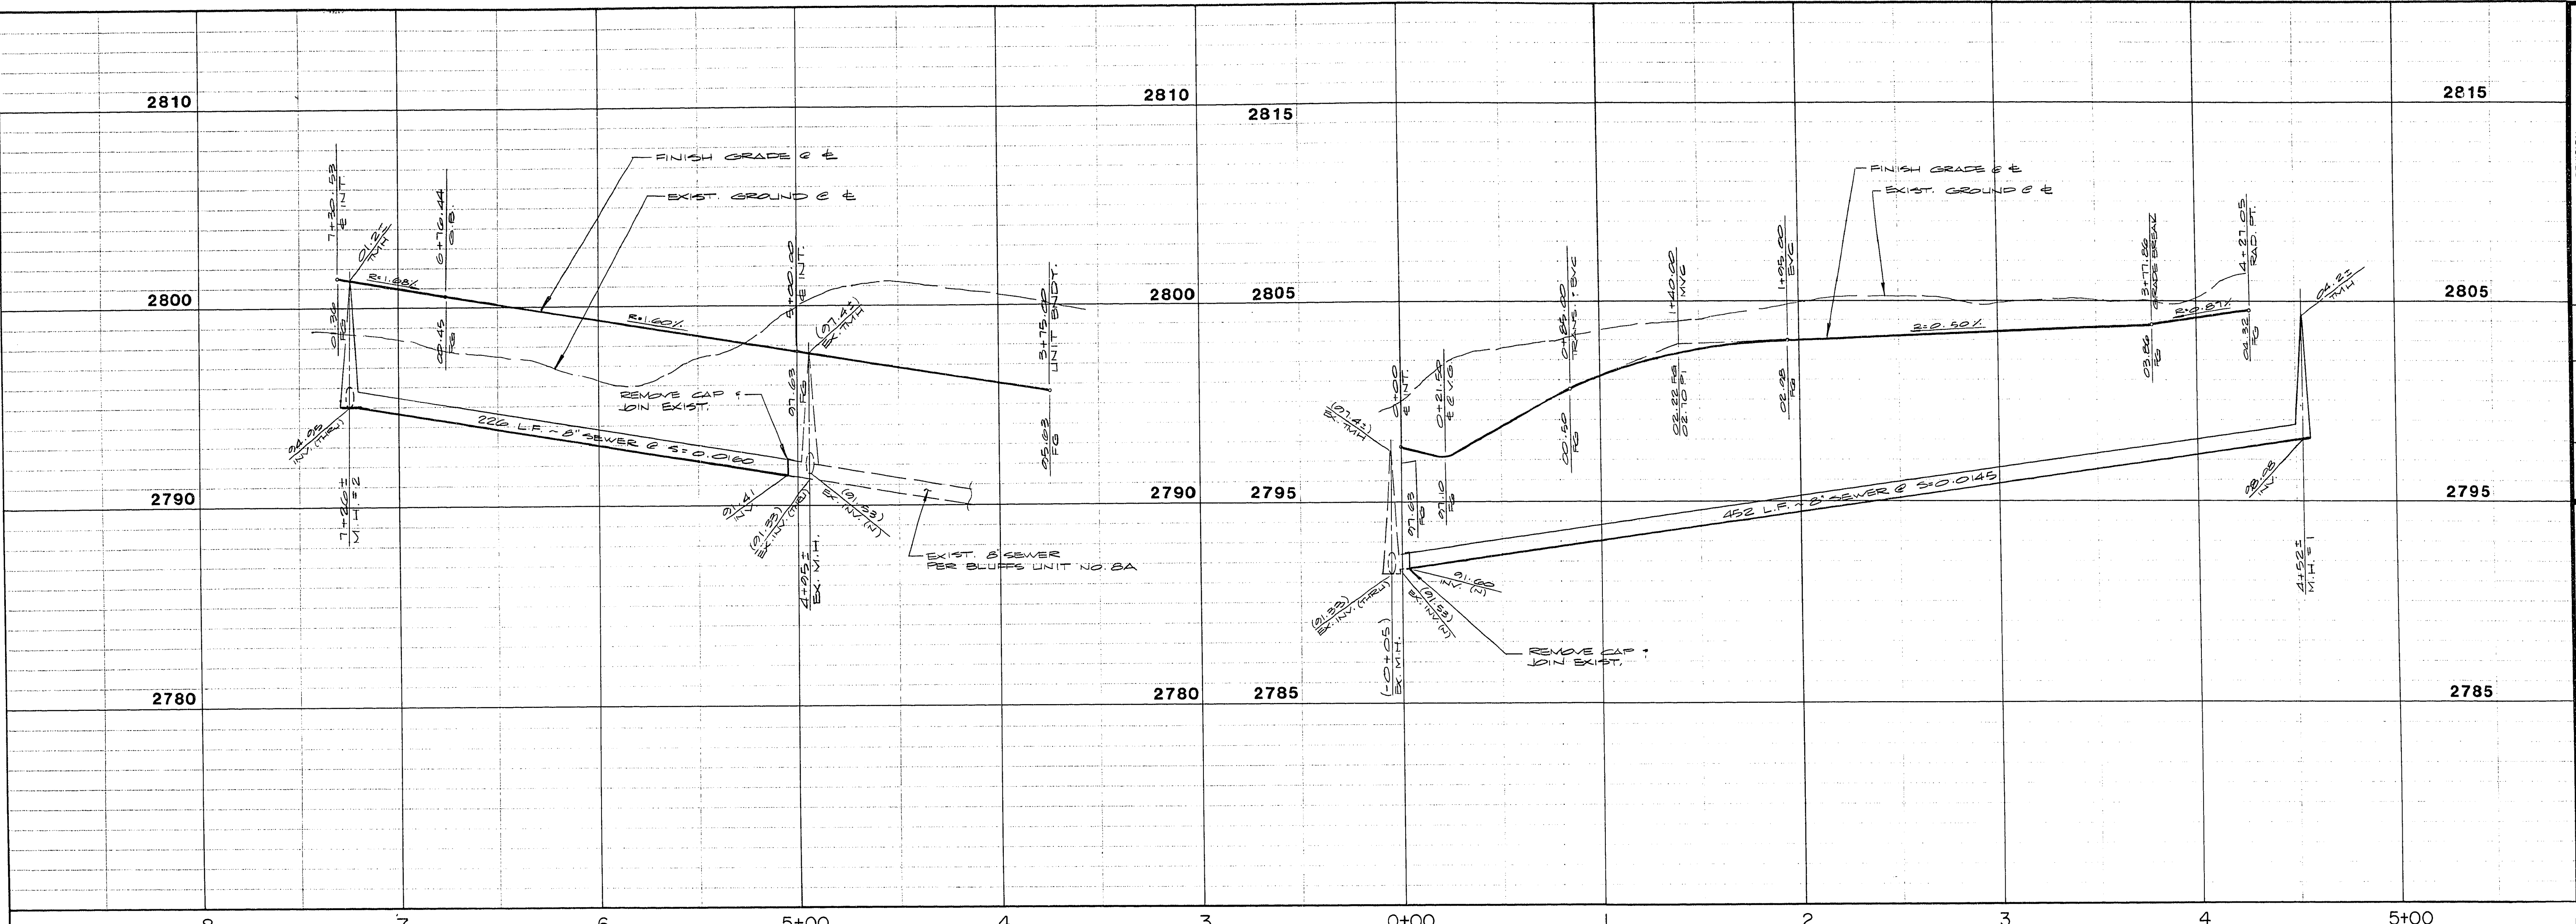

REV	DATE	BY	REVISION


ESI ENGINEERS & SURVEYORS INC.
7018 W. CHARLESTON AVE. SUITE 117
TOLSON, ILL. 61288-2644

SUBMITTED BY: *[Signature]* 7/6/07

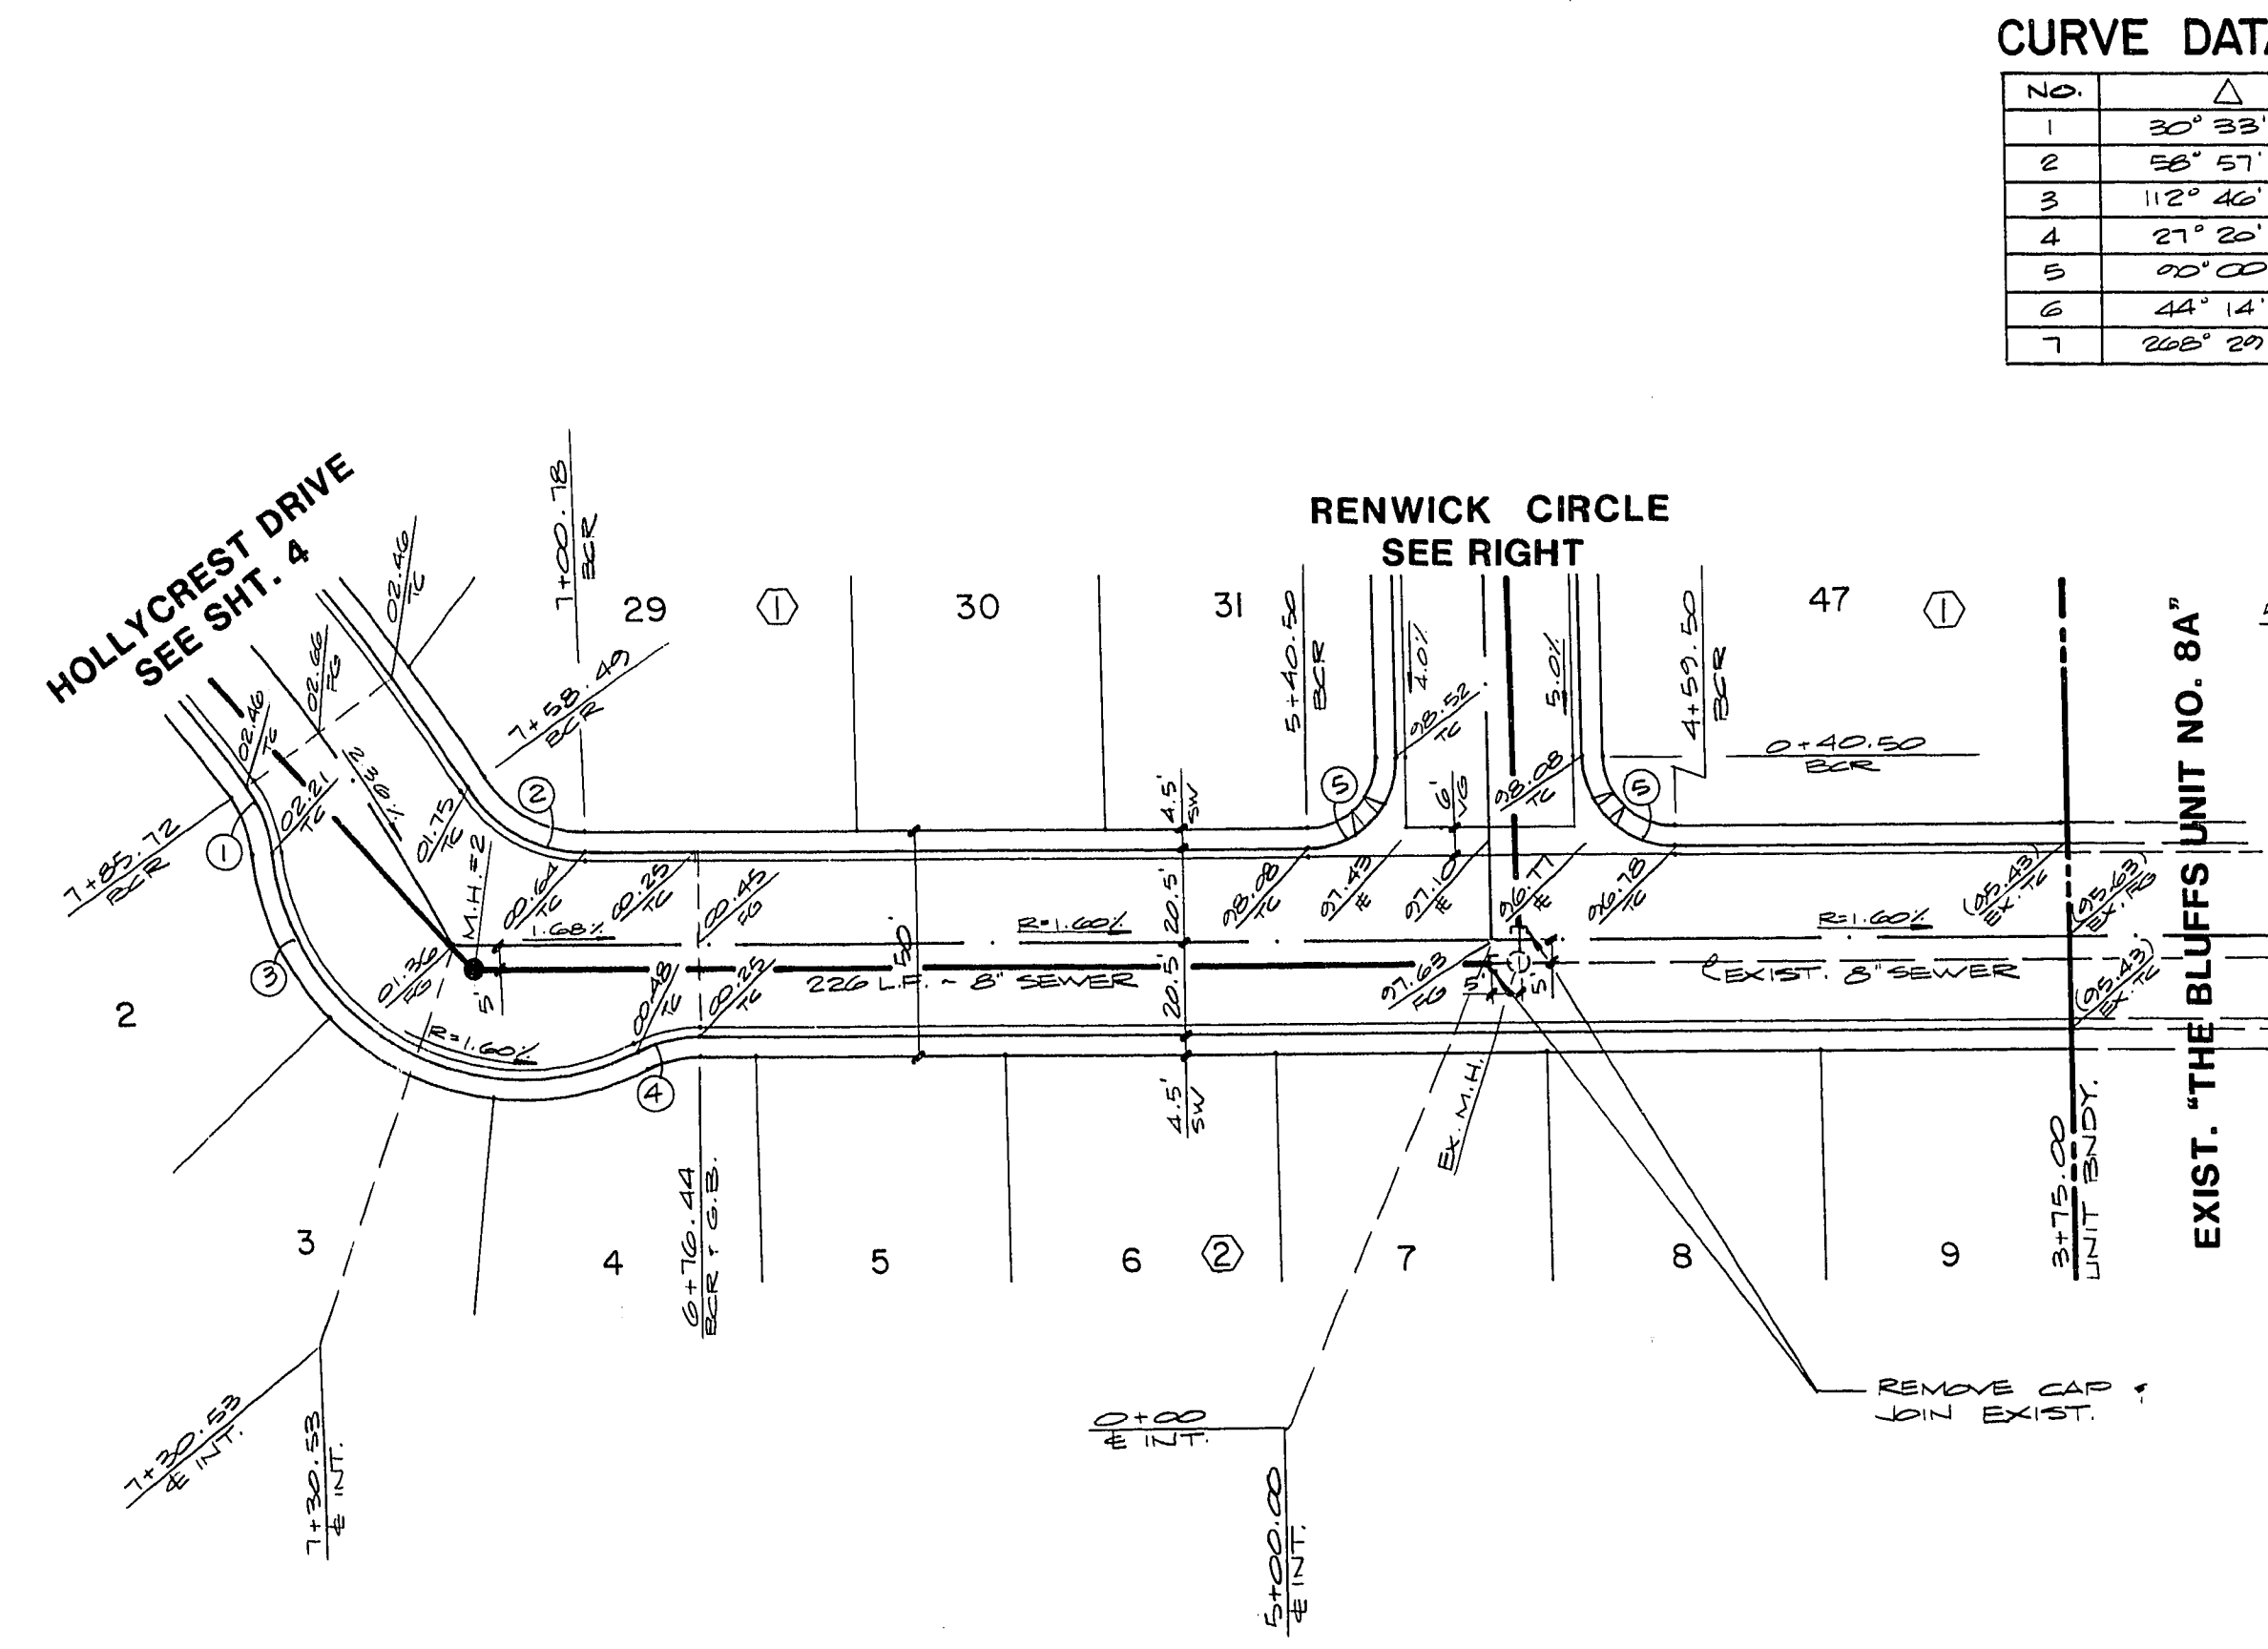


HOLLYCREST DRIVE

CURVE DATA TABLE					
NO.	Δ	R	L	T	
1	30° 33' 03"	30.00	10.00	8.10	
2	28° 57' 58"	30.00	30.27	16.98	
3	112° 46' 47"	55.00	108.20	82.75	
4	27° 28' 52"	30.00	14.32	7.30	
5	90° 00' 00"	20.00	31.42	20.00	
6	44° 14' 57"	30.00	23.17	12.20	
7	265° 29' 34"	40.50	189.79	41.58	

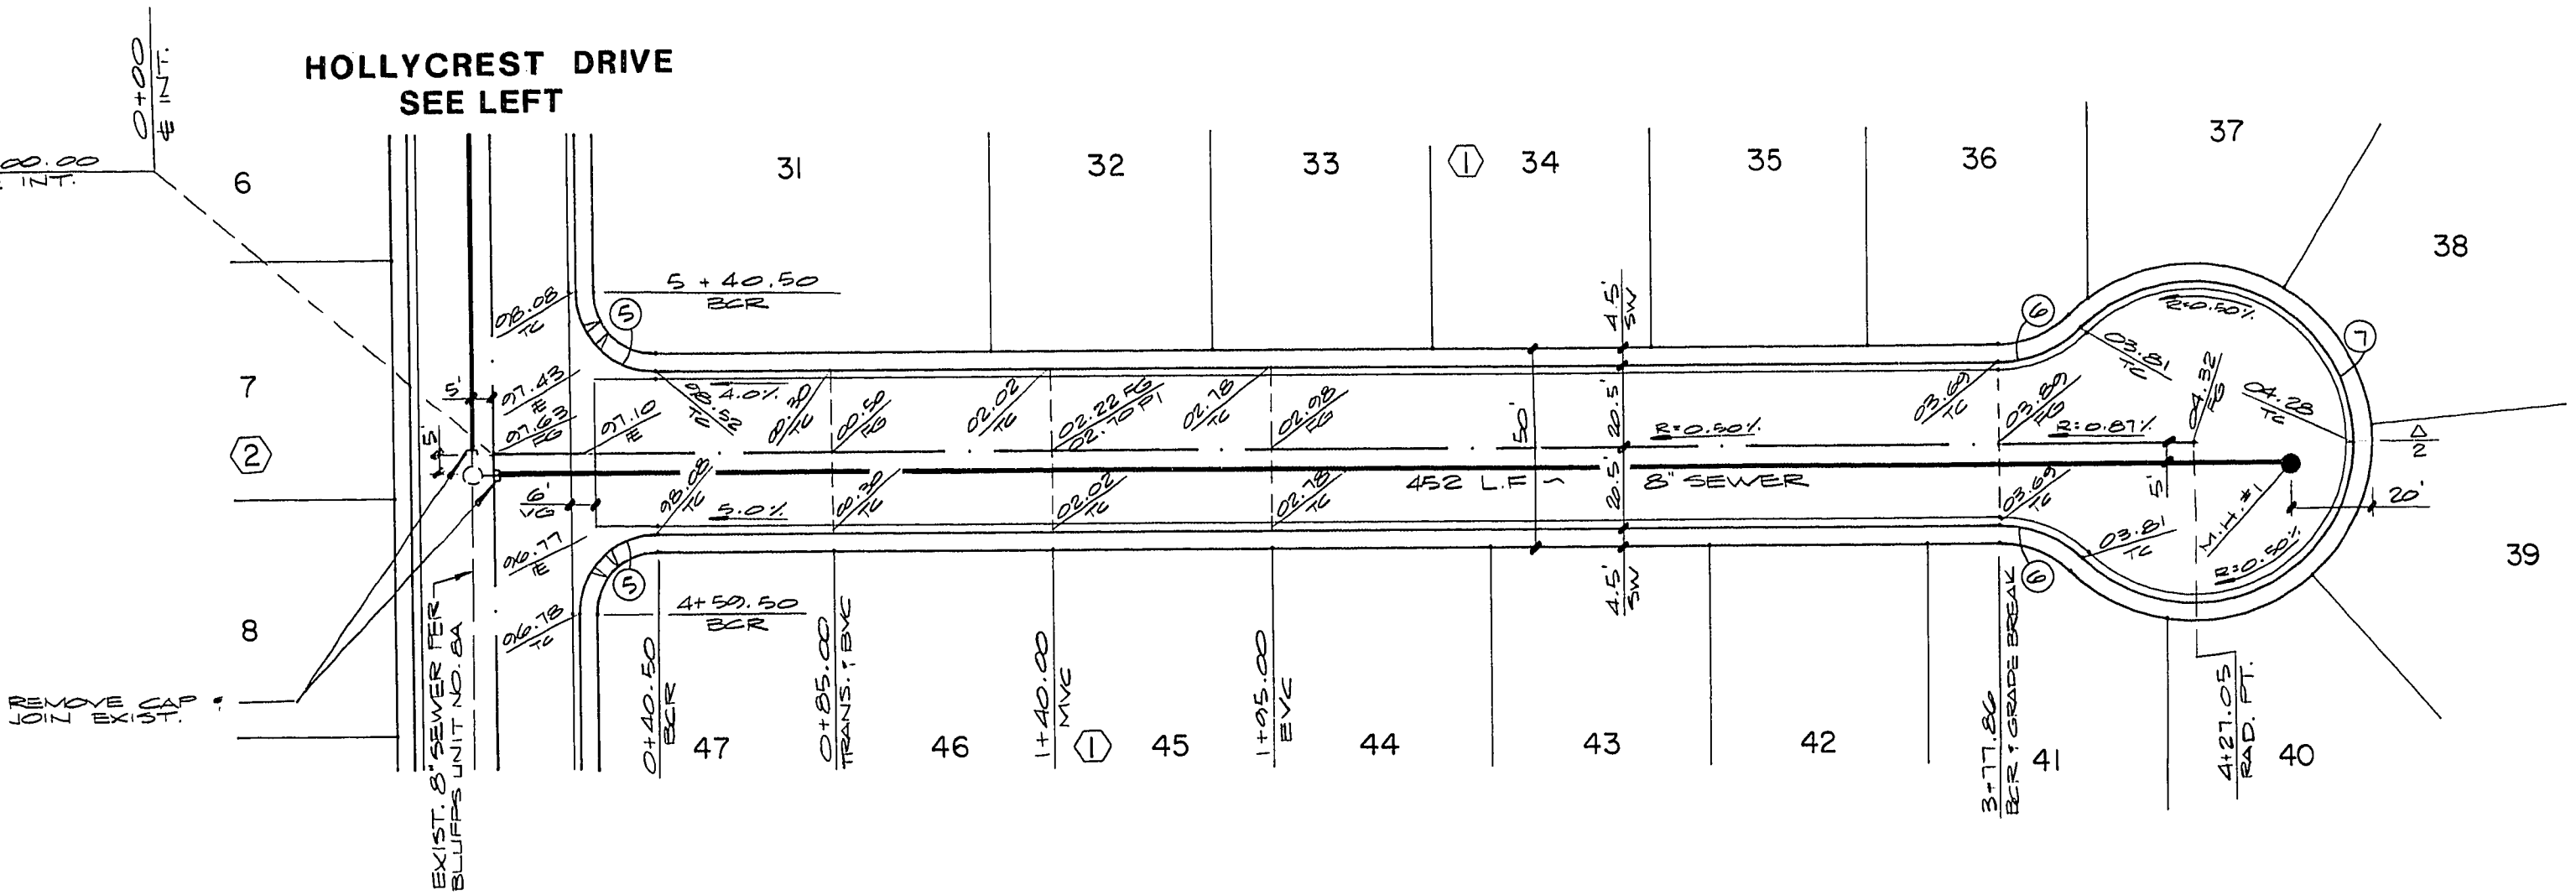

RENWICK CIRCLE

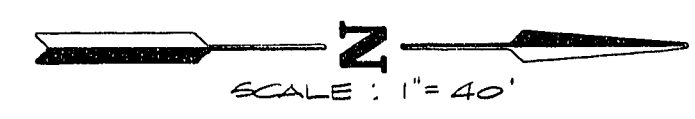

QUANTITY ESTIMATE	
2.0" ASPHALTIC CONCRETE PAVING	3,893 S.Y.
CONCRETE VALLEY GUTTER	562 S.F.
ROLL CURB AND GUTTER	1,074 L.F.
CONCRETE SIDEWALK	7,848 S.F.

TITLE	STREET & SEWER PLAN & PROFILE (HOLLYCREST DRIVE & RENWICK CIRCLE)
PROJECT	THE BLUFFS UNIT NO. 8B
WO NO.	5007
BY	CHAO
DATE	6/87
SCALE	HORIZ. 1"=40' VERT. 1"=4'
SHEET	3
OF 3 SHEETS	