

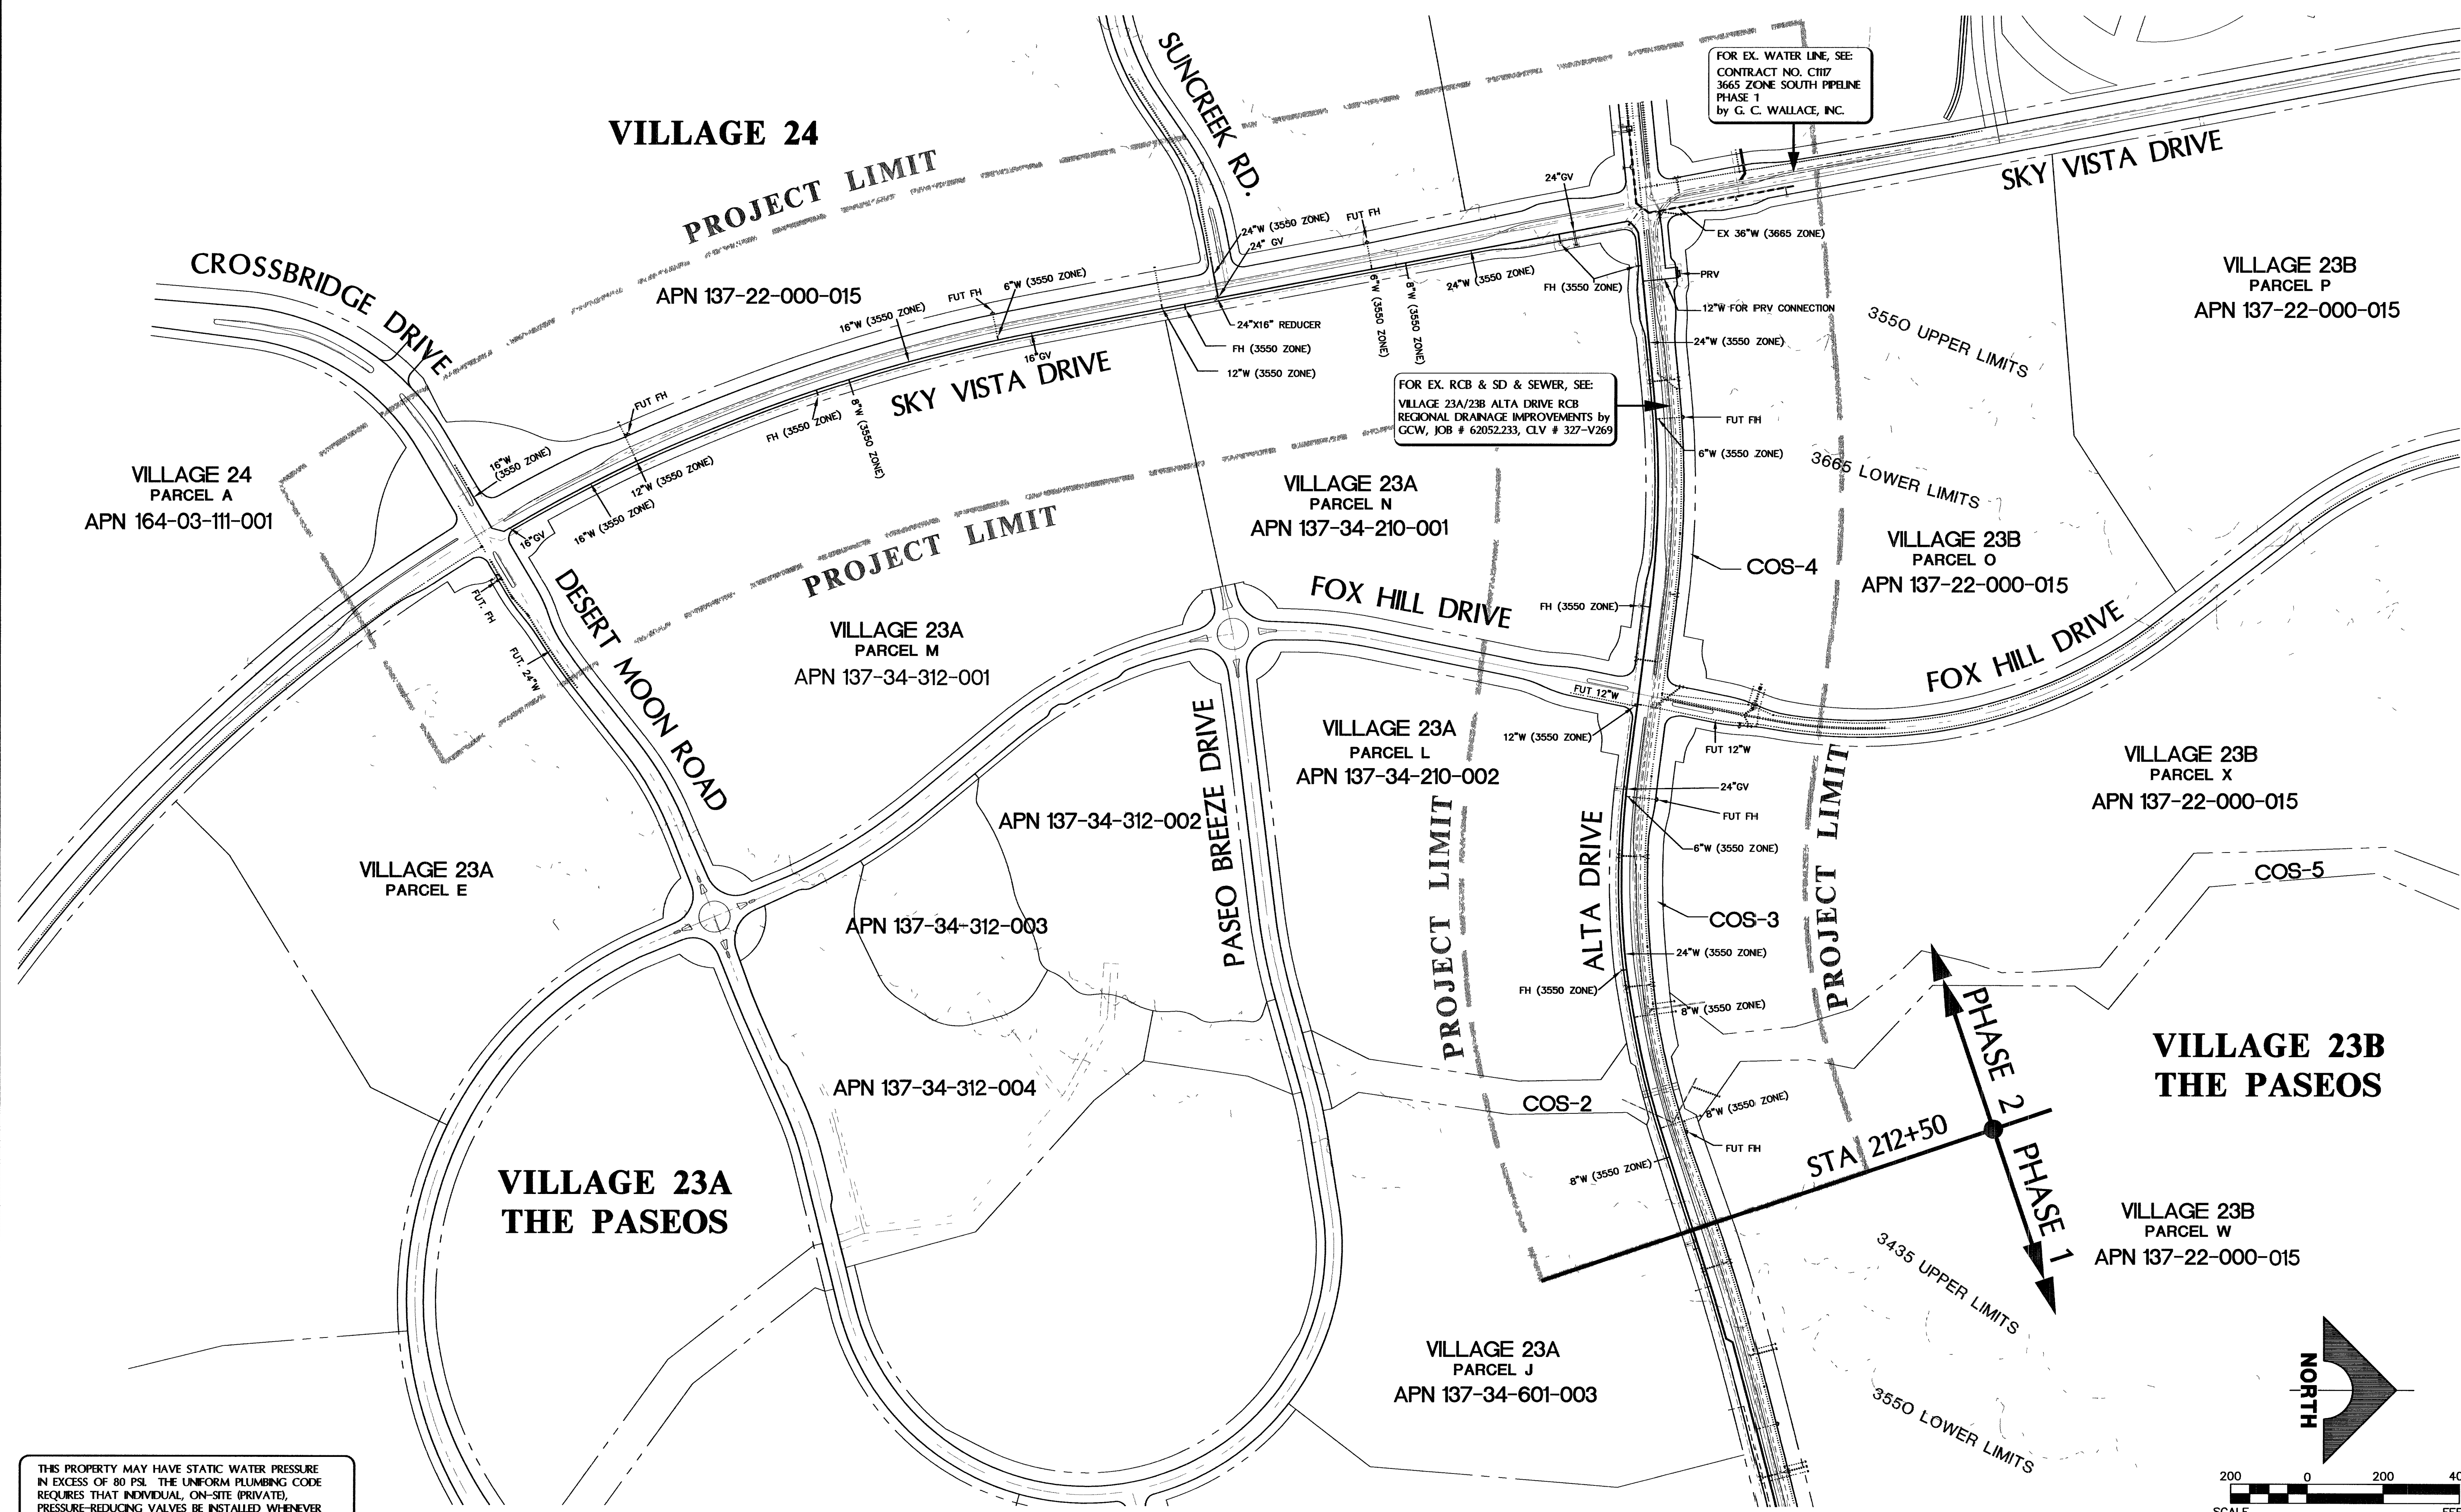


REV	DATE	DESCRIPTION	DATE	ACCT	ADD	DATE	COV	ADD
-----	------	-------------	------	------	-----	------	-----	-----

PLOT TIME: 11:42:59

3550 24-WATERLINE\DWG\IMPS\PHASE2\3550C005-B2.dwg c:\p106

.....

**VILLAGE 24**

PROJECT LIMIT

**FOR EX. WATER LINE, SEE:
CONTRACT NO. C1117
3665 ZONE SOUTH PIPELINE
PHASE 1
by G. C. WALLACE, INC.**

FOR EX. RCB & SD & SEWER, SEE:
VILLAGE 23A/23B ALTA DRIVE RCB
REGIONAL DRAINAGE IMPROVEMENTS by
GCW, JOB # 62052.233, CLV # 327-V26

THIS PROPERTY MAY HAVE STATIC WATER PRESSURE IN EXCESS OF 80 PSI. THE UNIFORM PLUMBING CODE REQUIRES THAT INDIVIDUAL, ON-SITE (PRIVATE), PRESSURE-REDUCING VALVES BE INSTALLED WHENEVER THE PRESSURE EXCEEDS 80 PSI. PRV'S ARE THE DEVELOPER'S RESPONSIBILITY, AND WILL NOT BE INSPECTED OR INCLUDED IN THE ACCEPTANCE OF LVVWD FACILITIES. ESN.041

WATER MAIN JOINT DEFLECTION (PVC, 4" - 24")
PVC PIPE SHALL BE DEFLECTED AT THE JOINT ONLY.
THE MAXIMUM ALLOWABLE DEFLECTION SHALL BE
(1) DEGREE PER JOINT WITH A MINIMUM RADIUS OF
CURVATURE OF 1,150 FEET, PER UDACS 2.06.01
AND 2.02.02.

FOR CHANGES IN DIRECTION EXCEEDING THE MAXIMUM
ALLOWABLE JOINT DEFLECTION, FITTINGS SHALL BE USED.
ESN.059 94536

CONDITIONAL APPROVAL OF VALVED OUTLET (6" AND LARGER)

THE WATER PLANS SHOW ONE OR MORE VALVED OUTLETS
EXTENDING OUT OF PAVED AREAS. INSTALLATION OF THESE
OUTLETS IS ACCEPTABLE; HOWEVER, IF THE OUTLETS ARE
INCORRECTLY LOCATED OR NOT USED FOR ANY REASON
WHEN THE PROPERTY IS ACTUALLY DEVELOPED, THE DEVELOPER
SHALL ABANDON THE OUTLETS AT THE CONNECTION TO THE
ACTIVE MAIN IN ACCORDANCE WITH THE DISTRICT'S STANDARDS,
AND AT THE DEVELOPER'S EXPENSE. APPROVAL OF THE VALVED
OUTLET DOES NOT PROVIDE OR IMPLY A WATER COMMITMENT.
ESN037

THIS PROJECT PROVIDES FOR THE
INSTALLATION OF OFF-SITE MAINS
ONLY, AND DOES NOT PROVIDE
OR IMPLY ANY WATER COMMITMENT.
ESN.054

NOTES:

1. APPROVAL OF THESE PLANS FOR THE WATER STUB-OUT INSTALLATION WILL NOT BE CONSTRUED AS A COMMITMENT FOR WATER SERVICE TO THE PROPERTY.
2. INSTALL PIPELINE MARKER BALLS IN TRENCH ABOVE EACH HORIZONTAL ELBOW FITTING. PER UDACS PLATE NO. 27.
3. ALL SEWER/STORM DRAINS CROSSING WATER LINES MUST CONFORM TO SECTION 2.19 OF THE UNIFORM DESIGN AND CONSTRUCTION STANDARDS FOR POTABLE WATER SYSTEMS (UDACS) FOR WATER AND STORM MAIN CROSSINGS AND CLEARANCES.

APPROVED FOR CONSTRUCTION


CITY OF LAS VEGAS FIRE DEPARTMENT

APPROVED FOR CONSTRUCTION

LVVWD NO. 112652


LAS VEGAS VALLEY WATER DISTRICT

7/31/06
DATE