



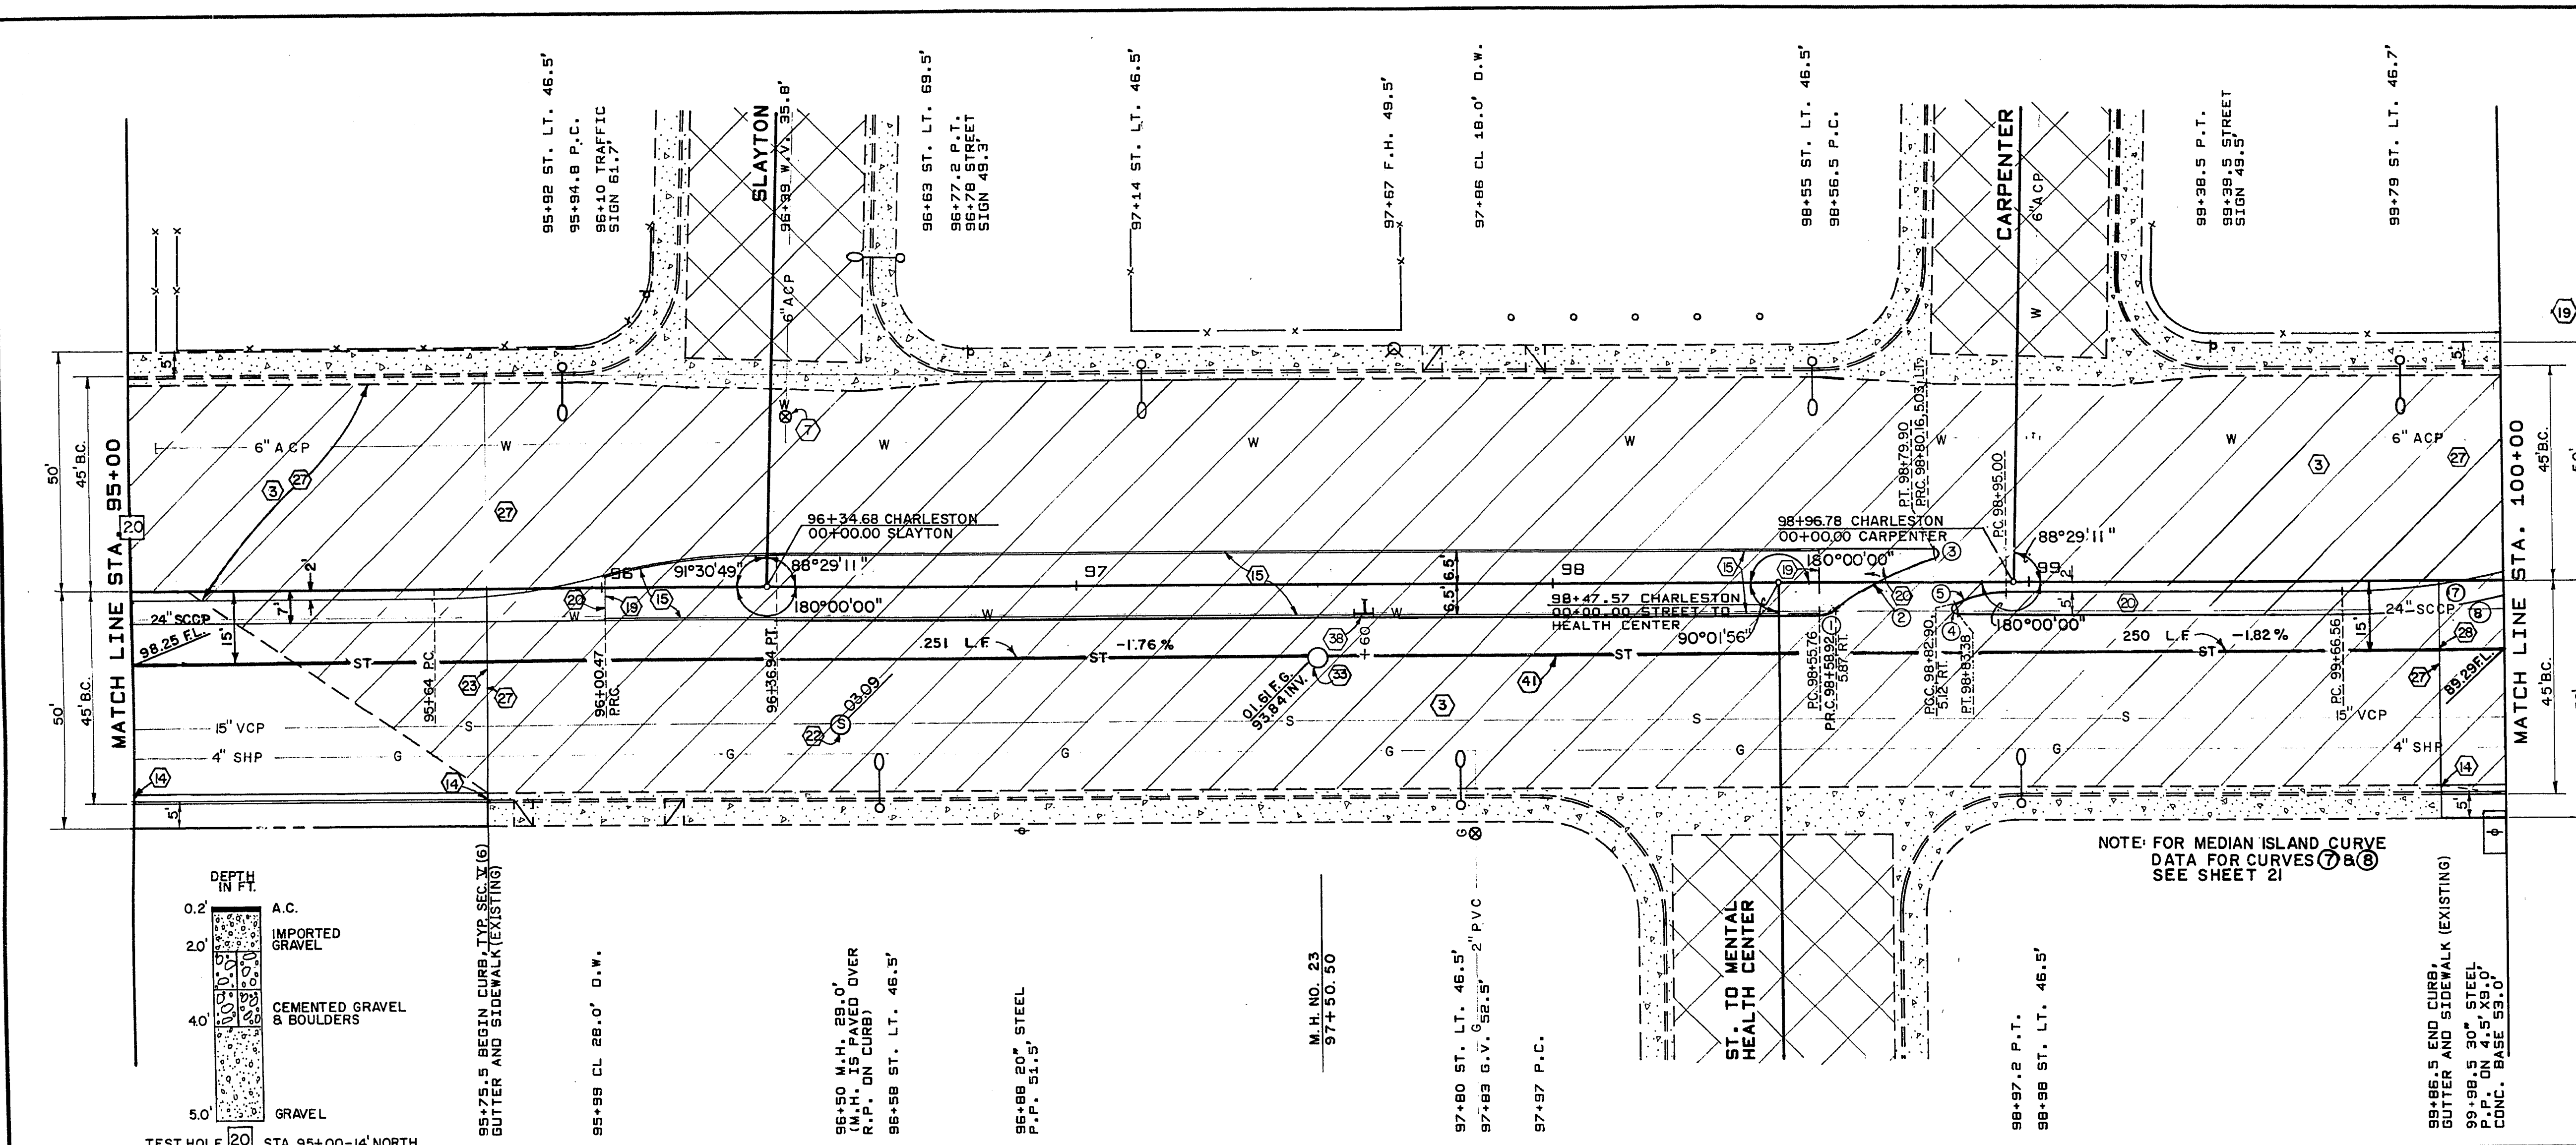

APPROXIMATE QUANTITIES — THIS SHEET						
CONST. NO.	ITEM NO.	DESCRIPTION	CLV S.I.D.	CLV	RSH S.I.D.	TOTAL
	201.100	EXCAVATION	7	293		CY 300
3	201.1002	REMOVE A.C. PAV'T.		4688		SY 4688
14	340.014	24" CONC. "L" TYPE C.&G.	89			LF 89
15	340.026	6" CONC. MED. CURB - TACK-ON		511		LF 511
19	334.503	1-1/2" A.C. - MEDIAN		32		TN 32
19	334.910	GREEN COLOR COATING	363			S.Y. 363
20	340.146	6" MONO. CONC. MED.		1314		SF 1314
22	512.500	ADJUST SAN. SEWER M.H.				EA 1
27	333.500	1/2" OPEN GRADED PLANT MIX	89	4152		SY 4241
27	334.112	6" A.C. PAV'T.	26	100		TN 126
27	334.006	3" A.C. PAV'T.		709		TN 709
27	334.800	BIT. PRIME COAT	4	1230		GAL 1234
27	334.006	3" A.C. PAV'T.	2	9		TN 11
39		1" WATER CONNECTION				EA 1
39	512.600	STORM DRAIN MANHOLE		8		V.F. 8
41	126.118 B	18" STORM SEWER PIPE		501		LF 501

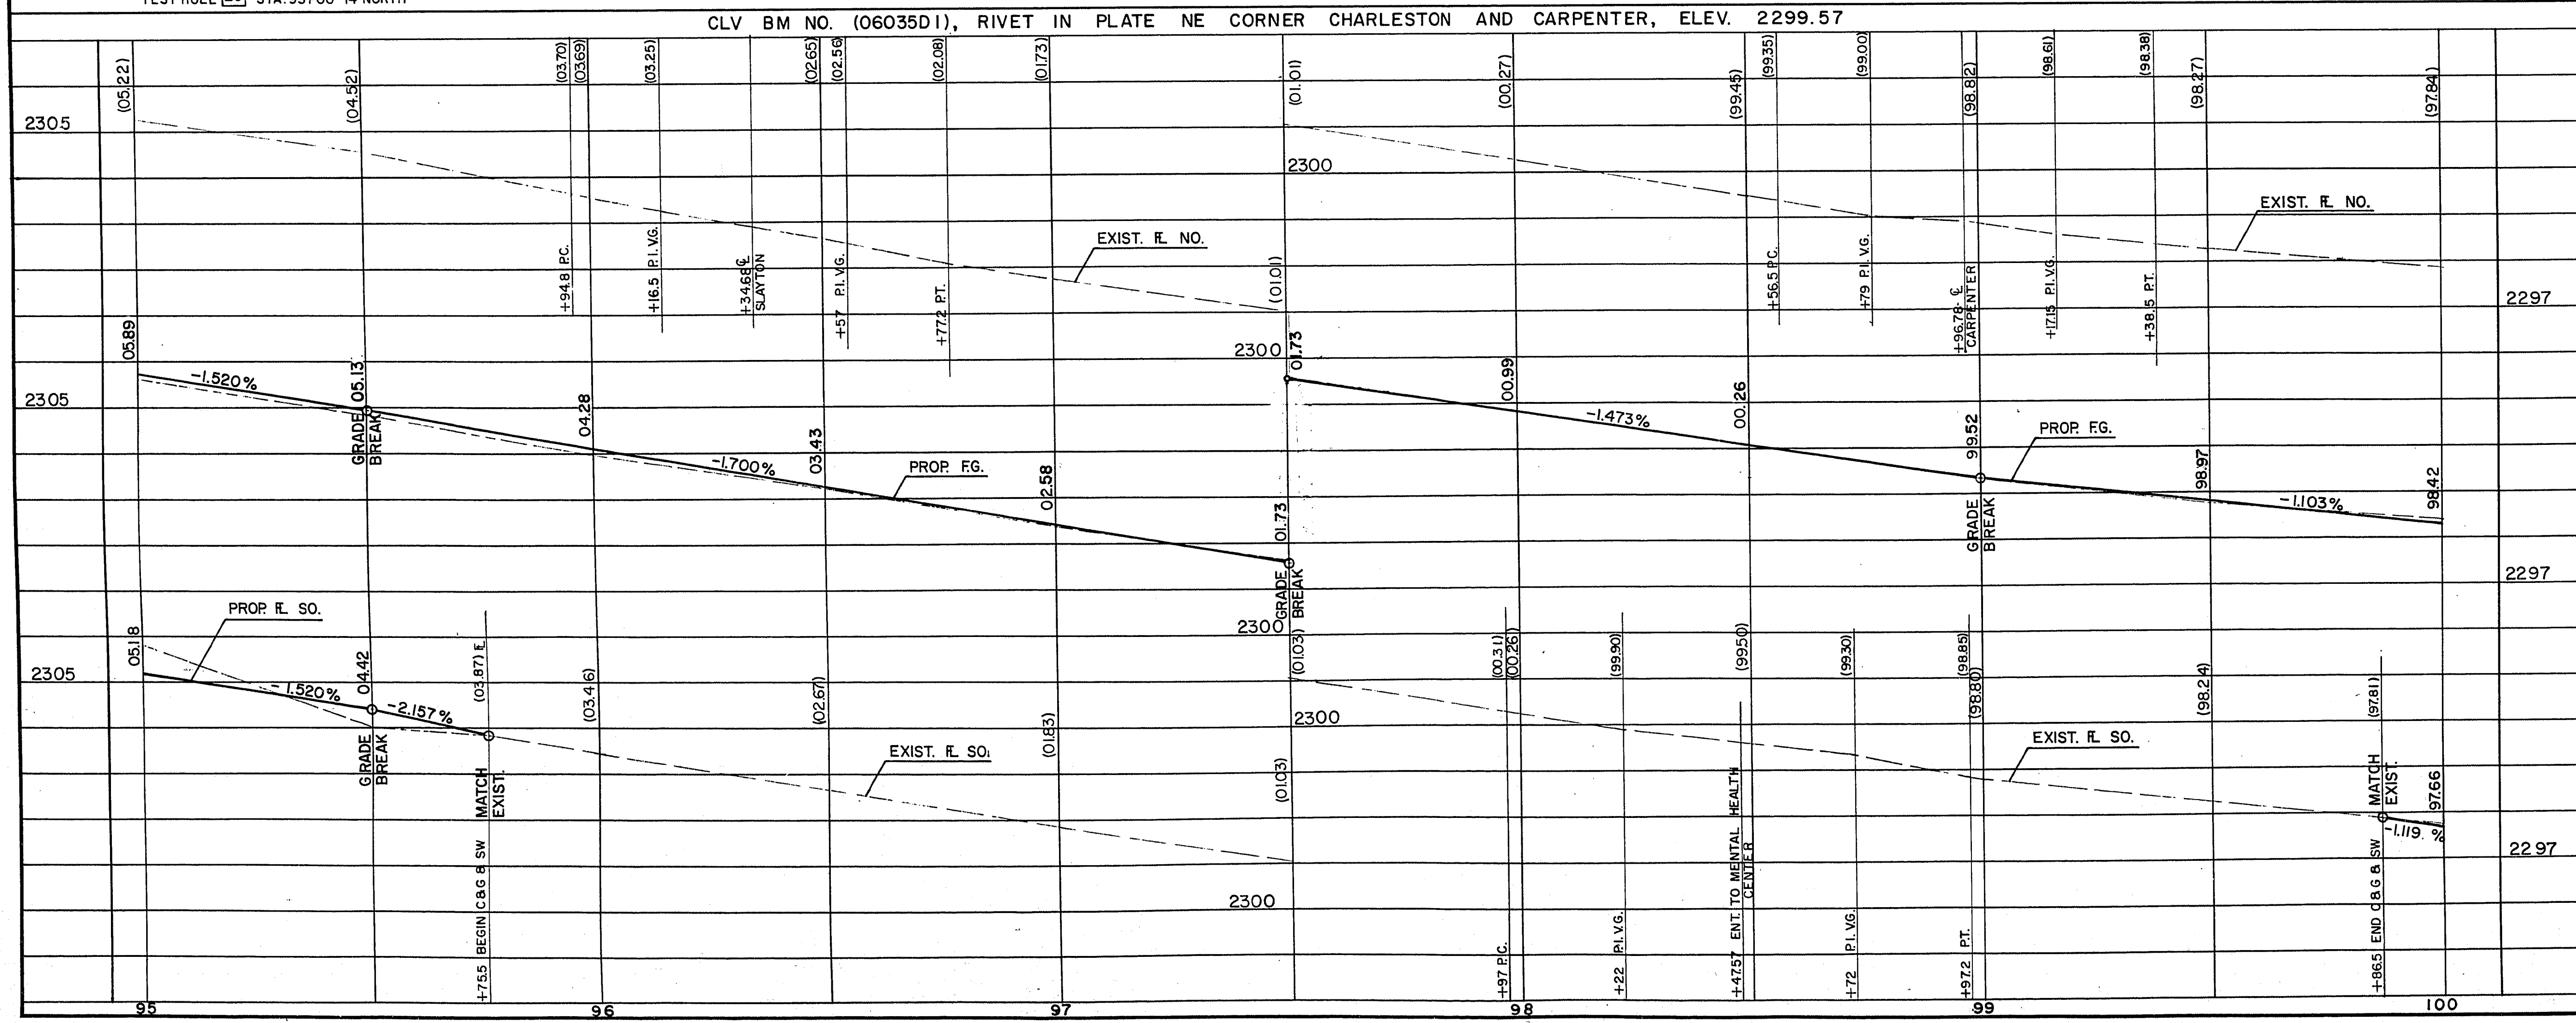

CURVE DATA				
NO.	RADIUS	DELTA	TANGENT	LENGTH
1	5' F.C.	39°16' 05"	1.78	3.43
2	57' F.C.	24°10' 40"	12.21	24.05
3	1' F.C.	164°54' 35"	7.55	2.88
4	1' F.C.	151°02' 42"	3.87	2.64
5	25' F.C.	28°57' 18"	6.45	12.63

CONTRACT
DRAWING
JUN 28 1974

REV. NO.	DESCRIPTION	BY	DATE	APPROVAL

CITY OF LAS VEGAS NEVADA
DEPARTMENT OF PUBLIC WORKS
SERVICES DIVISION

WEST CHARLESTON BOULEVARD
ANTELOPE WAY TO UPLAND BLVD.
STA. 95+00 TO STA. 100+00

W.D. NO. 7681	FBK. NO. 71-BX	DATE	DRAWING NO.
SC. (H) 1" = 20'	SC. (V) 1" = 2'	3-20-74	
DES. W.L. JAUBERT	DR. L.Z.	CALCOMP-618	FILE NO.
APPROVED BY DIRECTOR OF PUBLIC WORKS			107V-853
			SHEET 20 OF 58

16-4-29