



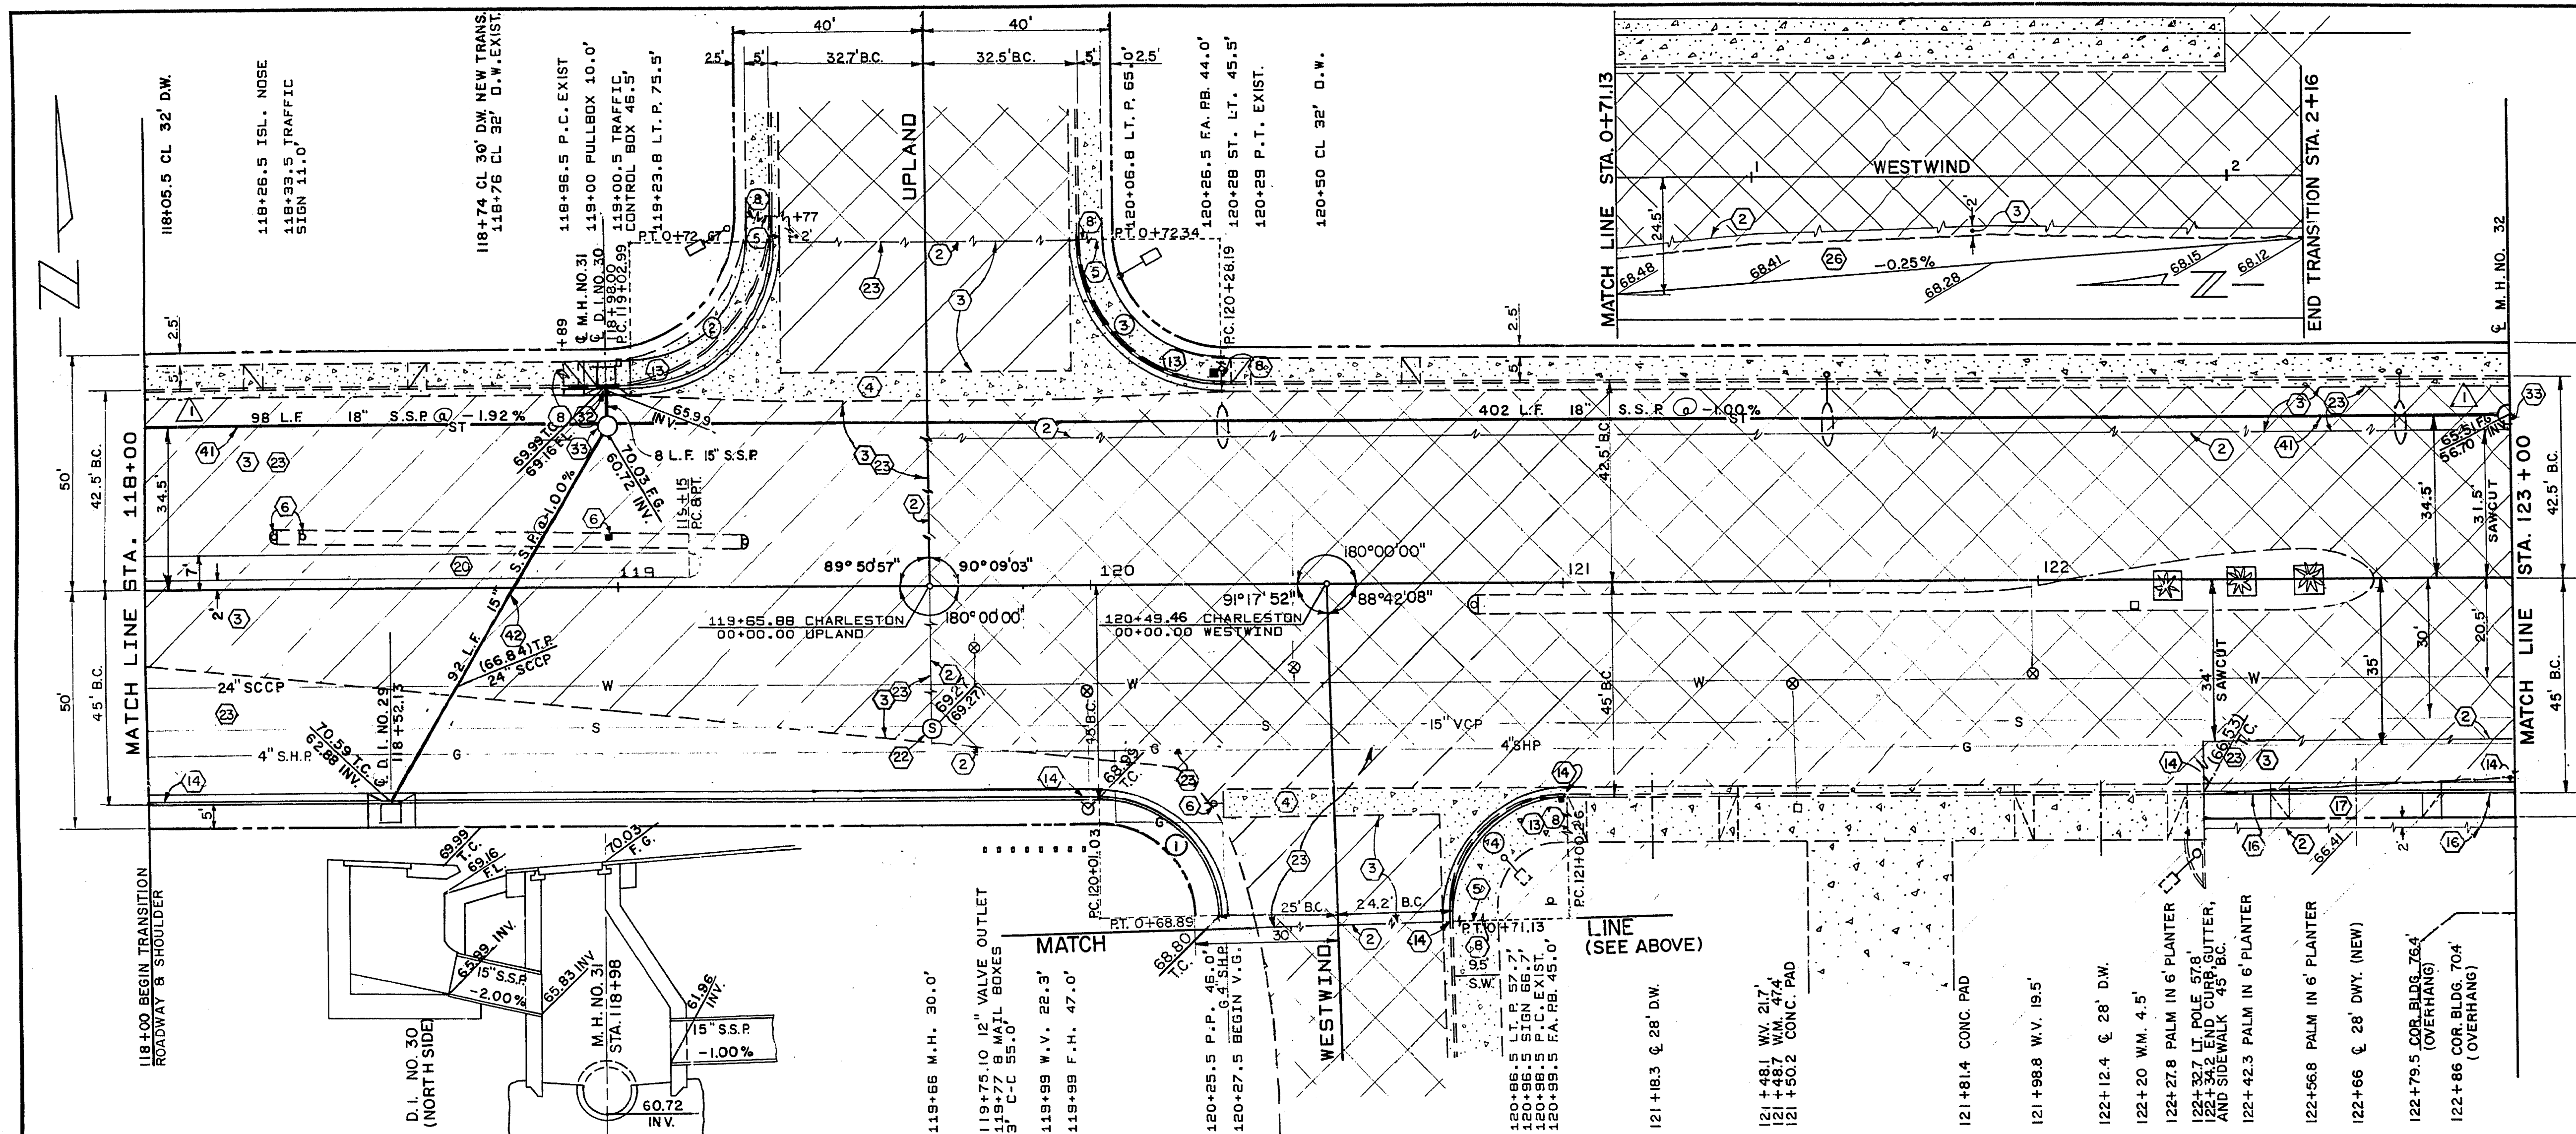

CONST. NO.	ITEM NO.	DESCRIPTION	CLV S.I.D.	CLV	RSH	CO. S.I.D.	UNIT	TOTAL
	201.100	EXCAVATION			122	23	SY	145
	201.1004	SAWCUT A.C.			385		LF	385
	201.1002	REMOVE A.C. PAV'T.			1168		SY	1168
		REMOVE & REPLACE STREET SIGNS		3			EA	3
	200.1103	REMOVE CONC. VALLEY GUTTER			1420		SF	1420
	200.1104	REMOVE CONC. SIDEWALK			850		SF	850
	200.1100	SAWCUT CONCRETE			30		LF	30
	340.014	24" CONC. "L" TYPE C & G.			134	231	LF	365
	302.200	TYPE II GRAVEL			42	9	CY	51
	331.003	1-1/2" A.C. PAV'T. (TRANS.)			3		TN	3
	333.100	BIT. FOG SEAL			30	5	GAL	35
	340.226	CONC. COMM. DWY.			252		SF	252
	340.146	6" MONO. CONC. MED.			585		SF	585
	333.500	1/2" OPEN GRADED PLANT MIX			1492	293	SY	1785
	334.112	6" A.C. PAV'T.			554	103	TN	657
	340.114	CONC. SIDEWALK			850		SF	850
	512.500	ADJUST MANHOLE					EA	1
	334.006	3" A.C. PAV'T. (TRANS.)			35		TN	35
	500.200	CONST. DROP INLET			2		EA	2
	512.600	STORM DRAIN MANHOLE			9		V.E	9
	126.118B	18" STORM SEWER PIPE			500		LF	500
	126.115B	15" STORM SEWER PIPE			100		LF	100
	126.118B	SAWCUT A.C.			324		LF	324
	126.118B	REMOVE A.C. PAV'T.			324		SY	324
	334.800	PRIME COAT			59		GAL	59

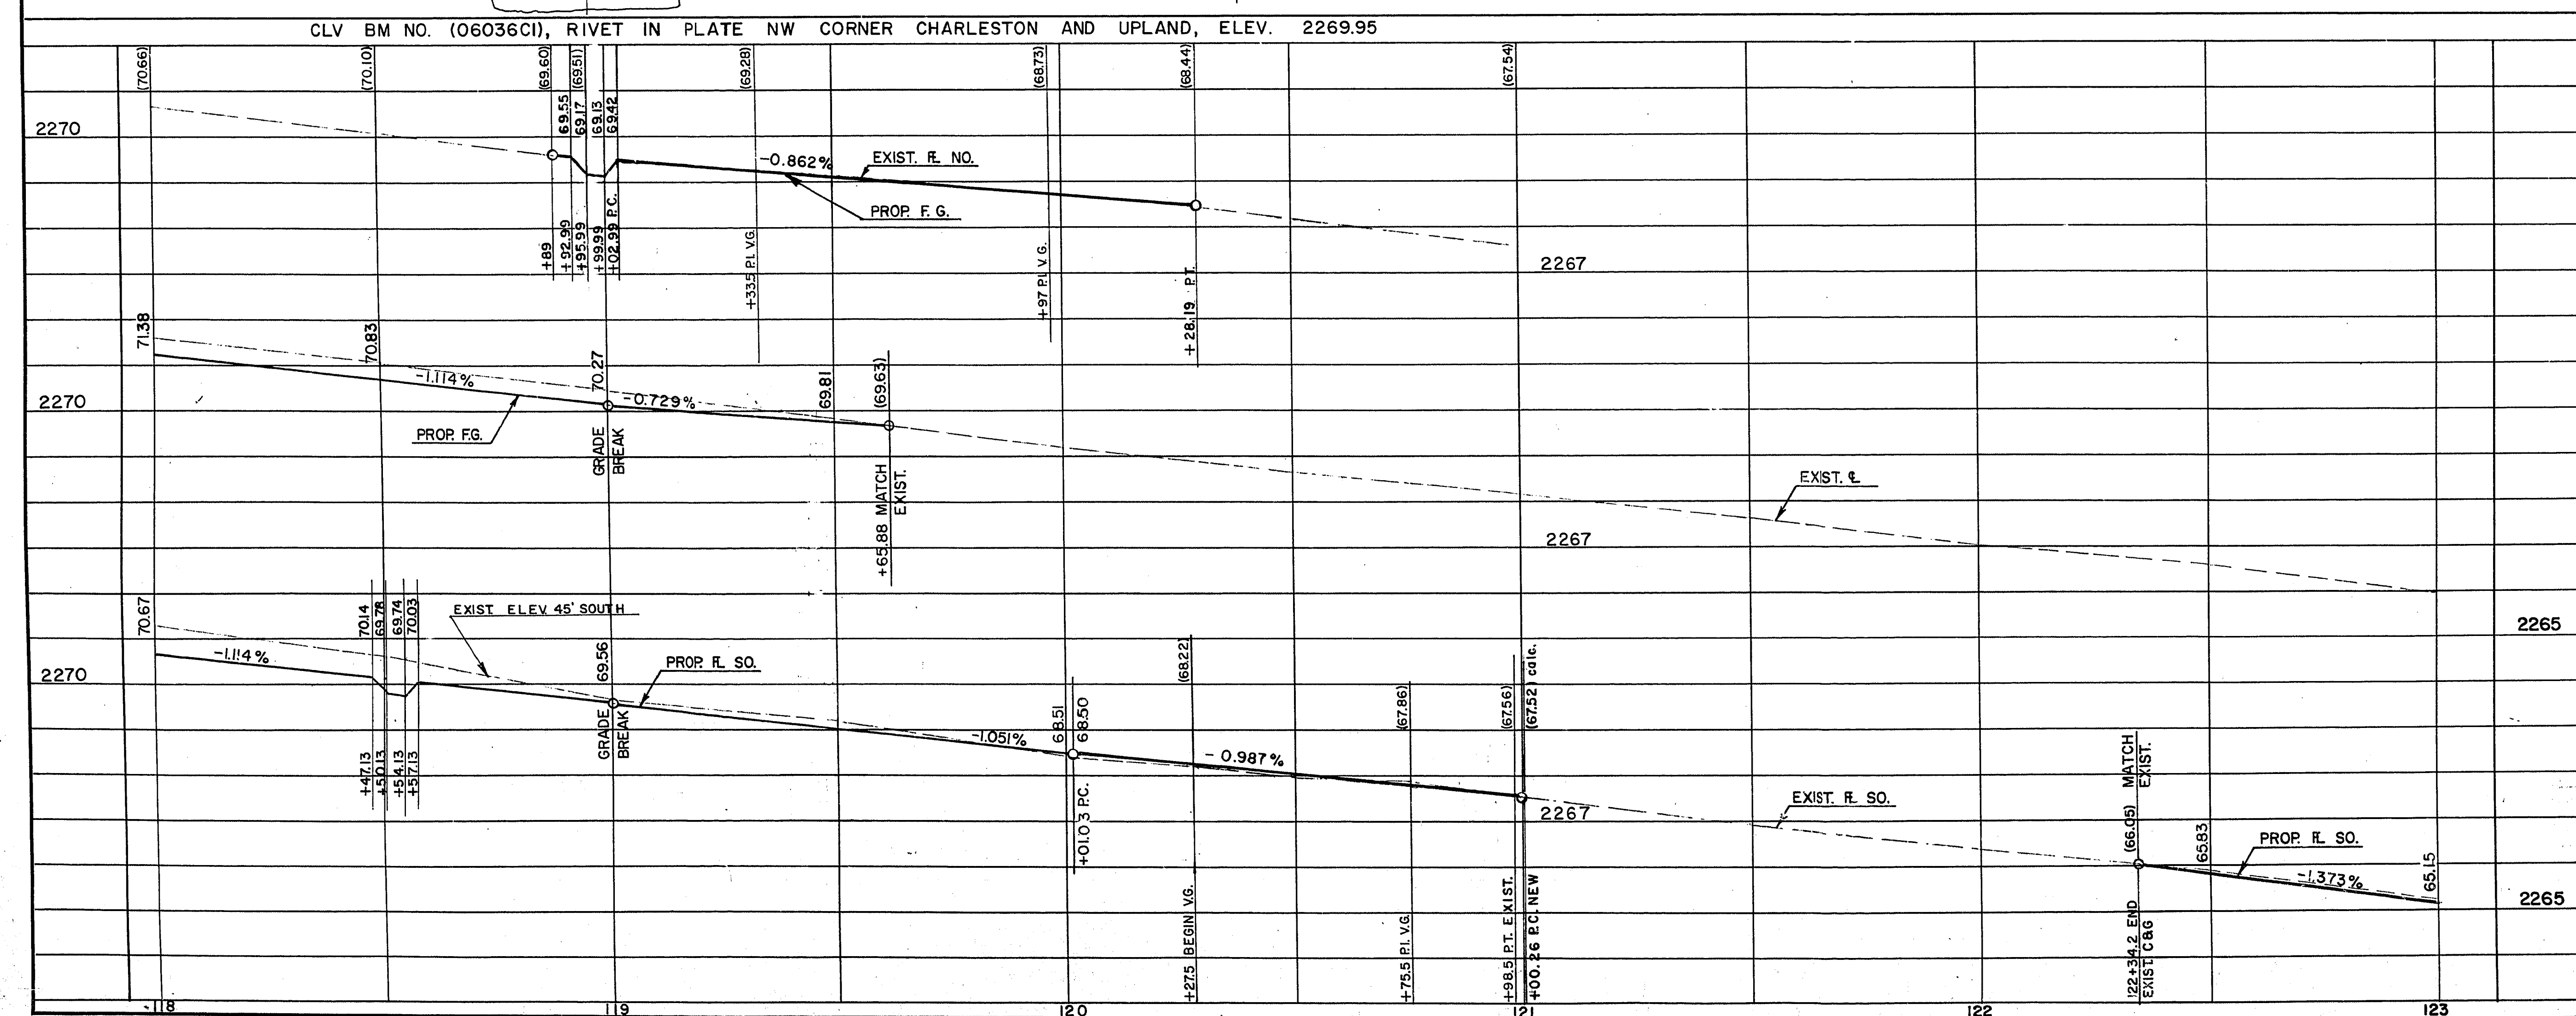

CONTRACT DRAWING
JUN 28 1974

CURVE DATA				
NO.	B.C. RADIUS	DELTA	TANGENT	LENGTH
①	25.0'	88° 42' 08"	24.44'	38.70'
②	30.0'	90° 09' 03"	30.08'	47.20'
③	30.0'	89° 50' 57"	29.92'	47.04'
④	25.0'	91° 17' 52"	25.57'	39.84'

CHANGED LOCATION OF S.S.P. BET. JONES & DECATUR

REV. NO. DESCRIPTION BY DATE APPROVAL

7/26/74

[Signature]

CITY OF LAS VEGAS NEVADA
DEPARTMENT OF PUBLIC WORKS
SERVICES DIVISION

WEST CHARLESTON BOULEVARD
ANTELOPE WAY TO UPLAND BLVD.
STA. 118+00 TO STA. 123+00

W.O. NO. 7681	F.B.K. NO. 71-8X	DATE	DRAWING NO.
SC. (H) 1" = 20'	SC. (V) 1" = 2'	3-20-74	
DES. W.L. JAUBERT	DR. L.Z.	CALCOMP-618	FILE NO.
APPROVED BY DIRECTOR OF PUBLIC WORKS			107V-853

SHEET 25 OF 58