
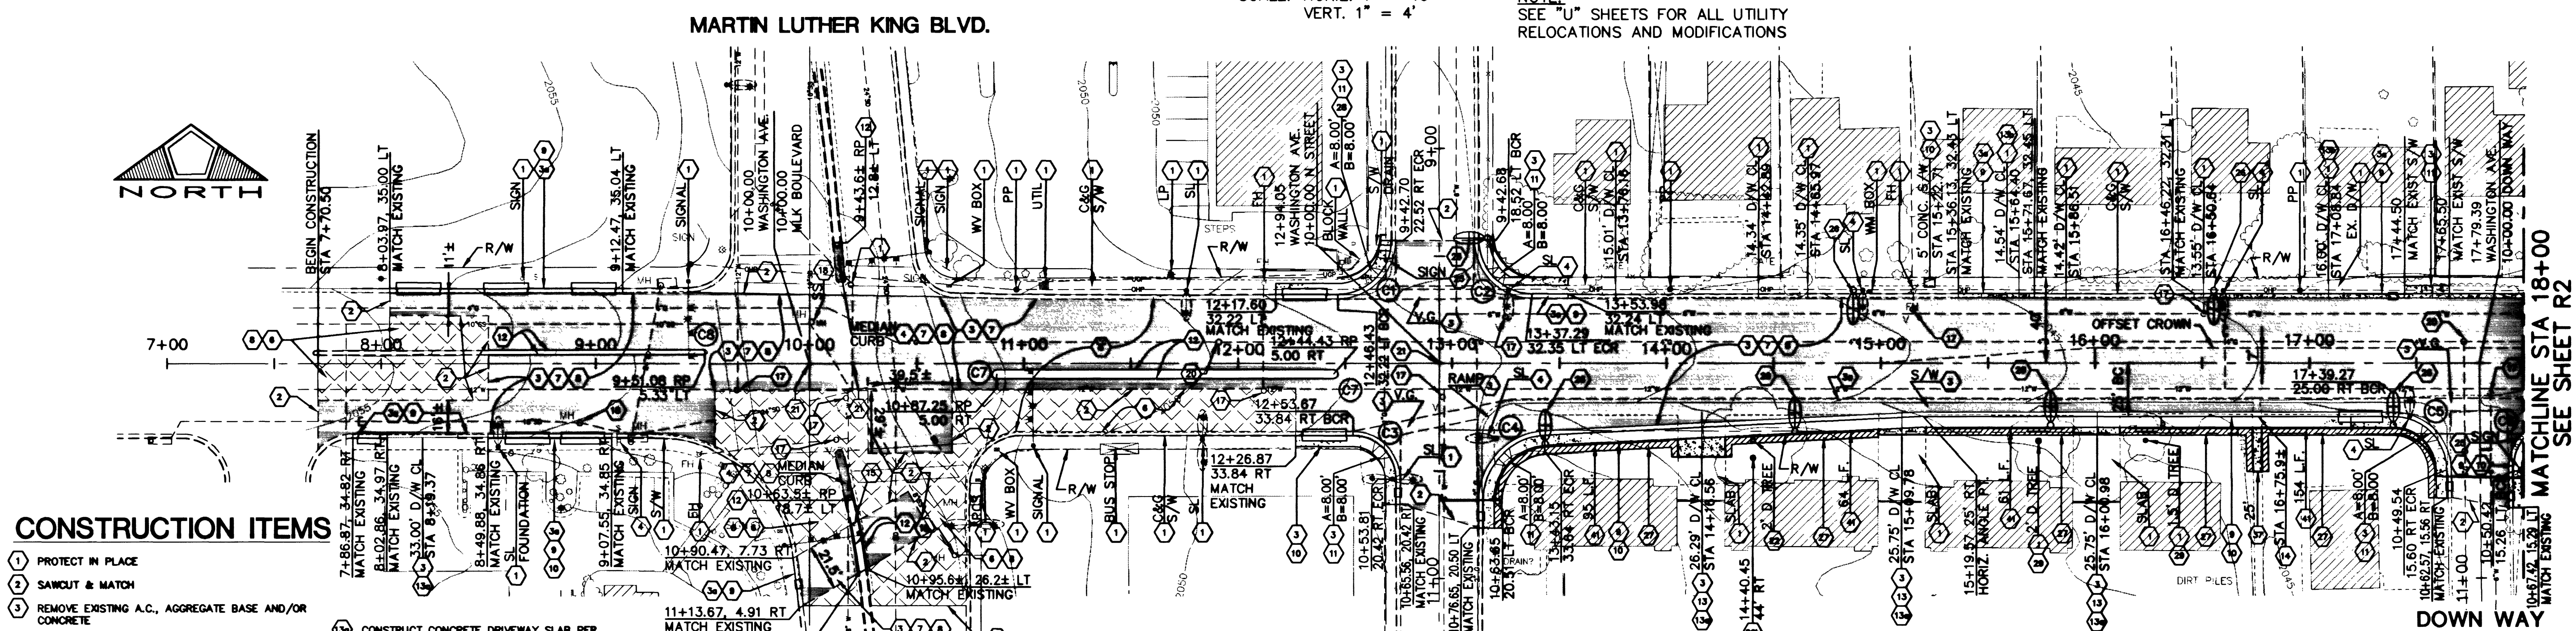


B:\1033\1040\New Maps\ROADWAY\PP-001.dwg Mon Jul 24 14:09:43 2000 RAT


C:\1033\1040\NEW MAPS\ROADWAY\PP-001.DWG

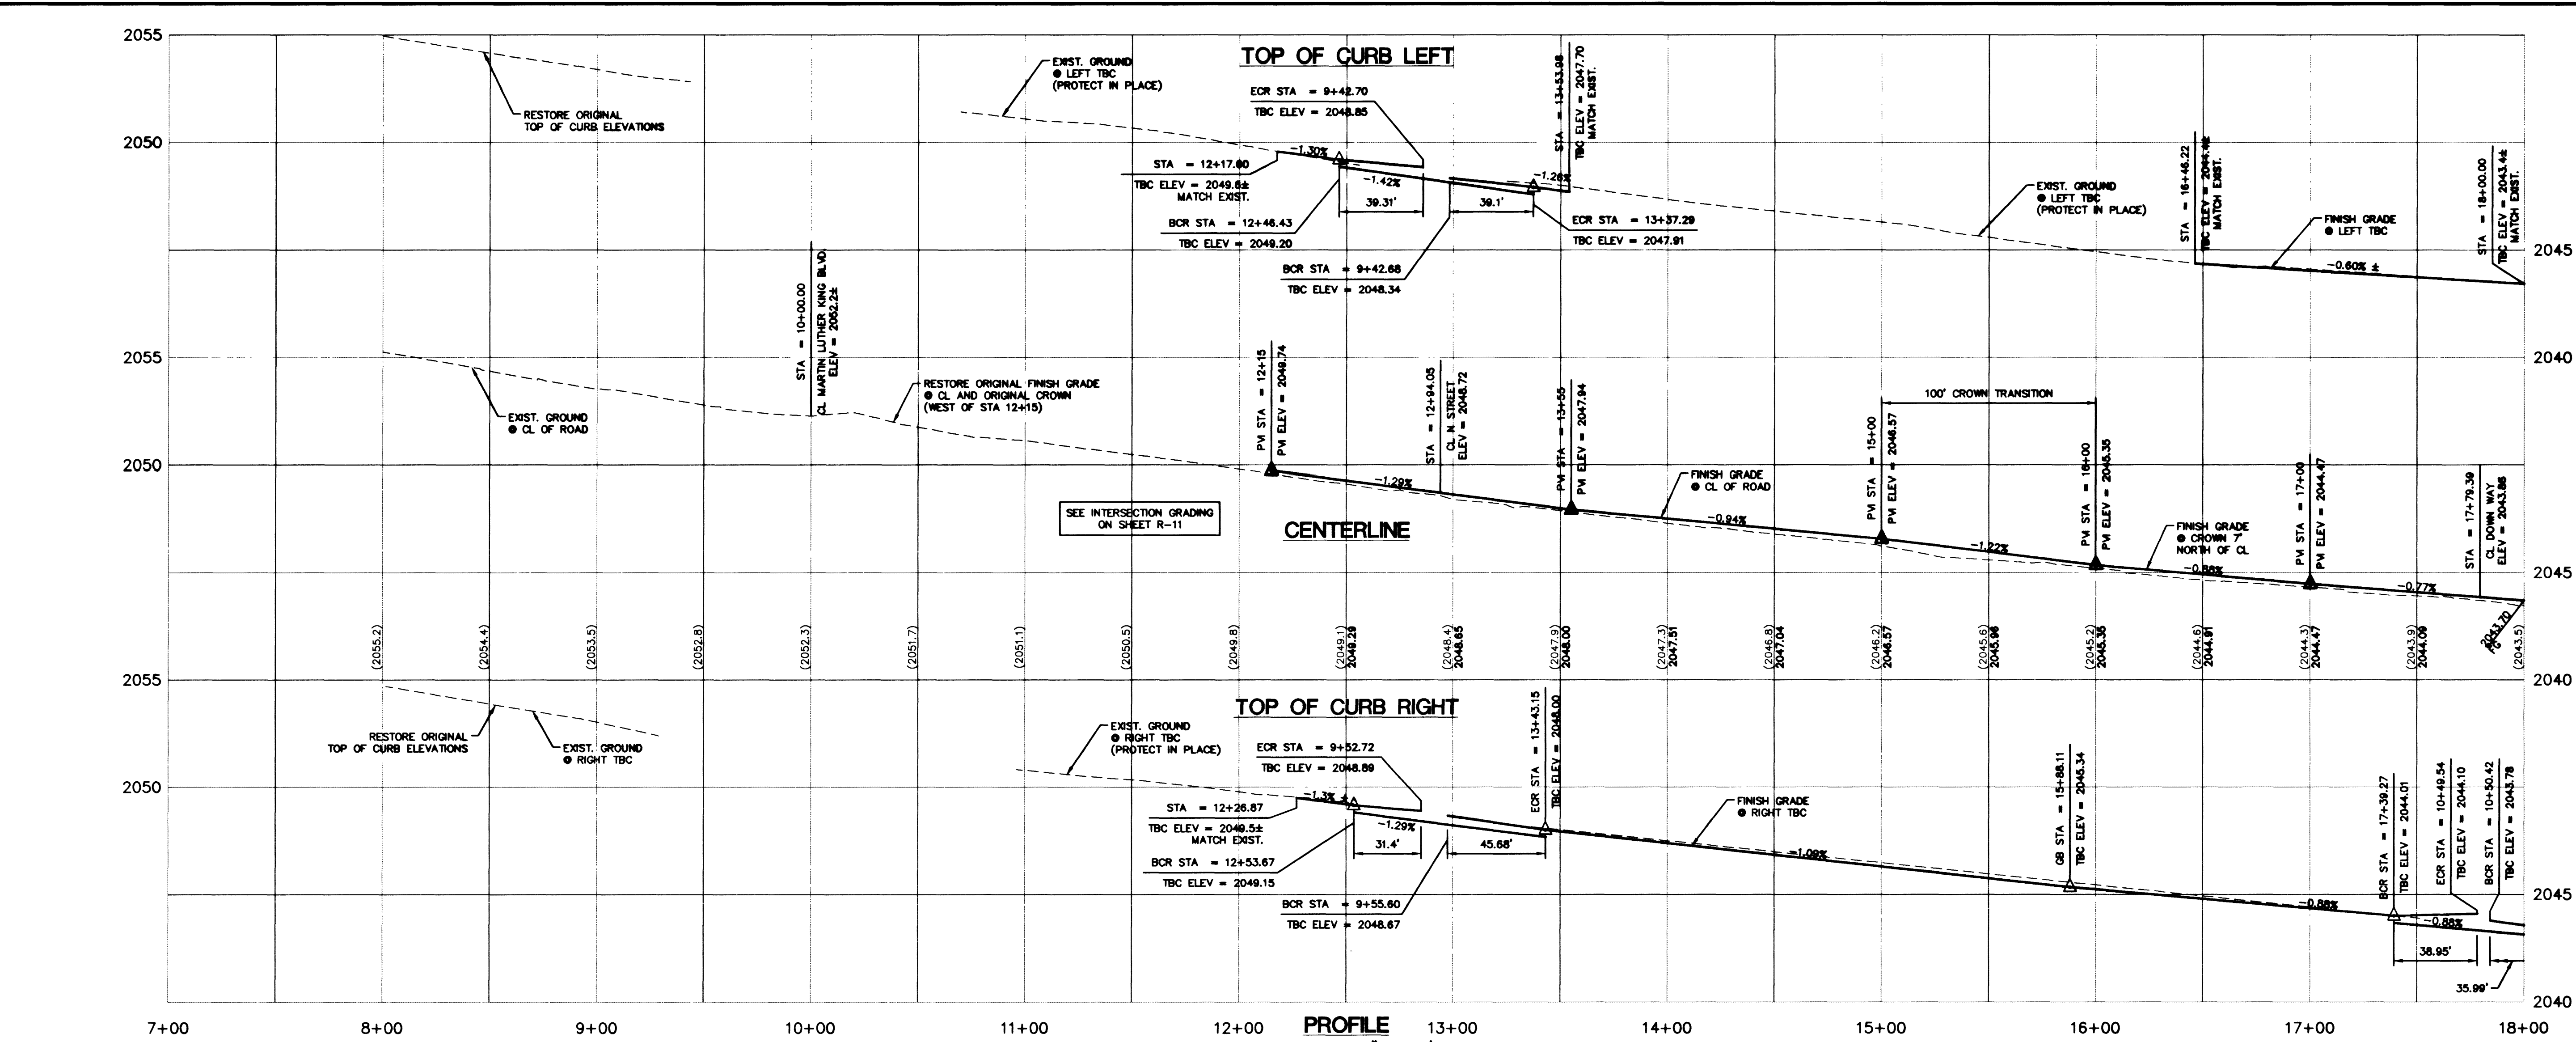

CONSTRUCTION ITEMS

- 1. PROTECT IN PLACE
- 2. SAWCUT & MATCH
- 3. REMOVE EXISTING A.C., AGGREGATE BASE AND/OR CONCRETE
- 4. REMOVE EXISTING CURB AND GUTTER
- 5. REMOVE
- 6. COLD PLANING/ROTOMILL
- 7. CONSTRUCT 7" A.C. OVER 18" TYPE II AGGREGATE BASE
- 8. CONSTRUCT 3/4" OPEN GRADE OVERLAY
- 9. CONSTRUCT TYPE "L" CURB & GUTTER PER C.C.U.S.D. NO. 216
- 10. CONSTRUCT SIDEWALK PER C.C.U.S.D. NO. 234
- 11. CONSTRUCT SIDEWALK RAMP PER C.C.U.S.D. NO. 235 CASE I
- 12. CONSTRUCT TACK ON ISLAND PER C.C.U.S.D. NO. 221
- 13. CONSTRUCT RESIDENTIAL DRIVEWAY PER C.C.U.S.D. NO. 223
- 14. CONSTRUCT CONCRETE DRIVEWAY SLAB PER DETAIL 1 SHEET R-14
- 15. CONSTRUCT DEPRESSED DRIVEWAY GUTTER ONLY PER C.C.U.S.D. NO. 223
- 16. CONSTRUCT COMMERCIAL DRIVEWAY PER C.C.U.S.D. NO. 224
- 17. CONSTRUCT SIDEWALK DRAIN PER C.C.U.S.D. NO. 238
- 18. REMOVE AND RESET
- 19. ADJUST VALVE BOX, FRAME & COVER TO FINISH GRADE PER U.D.A.C.S. UDS PLATE NO. 8
- 20. ADJUST MANHOLE, FRAME & COVER TO FINISH GRADE PER C.C.U.S.D. NO. 403 OR NO. 404
- 21. ADJUST GAS VALVE BOX TO FINISH GRADE BY OTHERS
- 22. REMOVE AND REESTABLISH SURVEY MONUMENT OR BRASS CAP TO FINISH GRADE PER C.C.U.S.D. NO. 239
- 23. REMOVE TREE (> 1-FOOT DIAMETER)
- 24. INSTALL TREE PER DETAIL 3 SHEET R-15
- 25. RELOCATE SIGN
- 26. INSTALL STREET LIGHT AND BASE PER SHEETS E1, E2 & E3
- 27. RESTORE GRASS AND IRRIGATION LINES - 3" STRIP
- 28. CONSTRUCT 24" SPILL-TYPE CURB AND GUTTER PER C.C.U.S.D. NO. 219 FROM BOR TO ECR SEE DETAIL 2 SHEET R-15
- 29. CONSTRUCT ROOT CONTROL BARRIER PER DETAIL 3 SHEET R-14
- 30. CONSTRUCT CONCRETE GUTTER PER DETAIL 5 SHEET R-14
- 31. CONSTRUCT BLOCK WALL PER DETAIL 1 SHEET R-16

WASHINGTON AVENUE

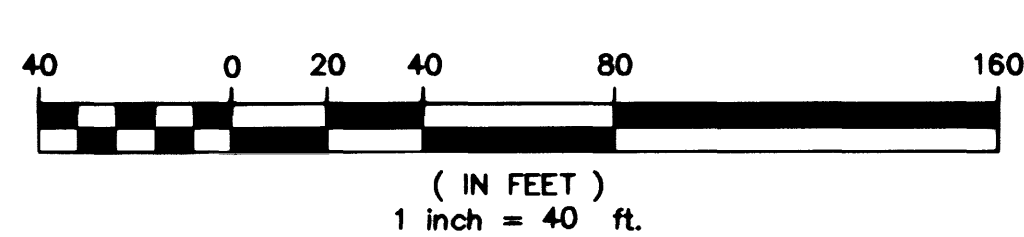

Curve Table				
No.	Radius	Delta	Tangent	Length
C1	25.00	90°05'55"	25.04	39.31
C2	25.00	89°36'39"	24.83	39.10
C3	20.00	89°57'24"	19.98	31.40
C4	30.00	87°15'05"	28.59	45.68
C5	25.00	89°16'12"	24.68	38.95
C6	25.00	90°38'11"	25.28	39.58
C7	2.00	180°00'00"	00.00	6.28
C8	1.00	180°00'00"	00.00	3.14

Avoid hitting overhead power lines. It's costly.

Call before you do Overhead

1-702-593-6111

Avoid cutting underground utility lines. It's costly.

Call before you do Dig.

1-800-227-2600

DATE: 02/10/00
DRAWN BY: JRL/MTA
DESIGNED BY: JLT
CHECKED BY: JLT
JOB NO.: 0133.0141
SCALE: 40' H. / 4" V.

PENTACORE
CIVIL ENGINEERING • LAND SURVEYING • PLANNING
CONSTRUCTION MANAGEMENT • ADA CONSULTING
6783 WEST CHARLESTON BOULEVARD
LAS VEGAS, NEVADA 89146 (702)258-0115

CITY OF LAS VEGAS
WASHINGTON AVENUE
WASHINGTON AVENUE
PLAN & PROFILE
STA 7+00 TO STA 18+00

PROFESSIONAL ENGINEER-STATE OF NEVADA
MYRON R. WELLS
No. 2646

SHEET 8
R1
OF 58

DWG. NO. 107-V3119