


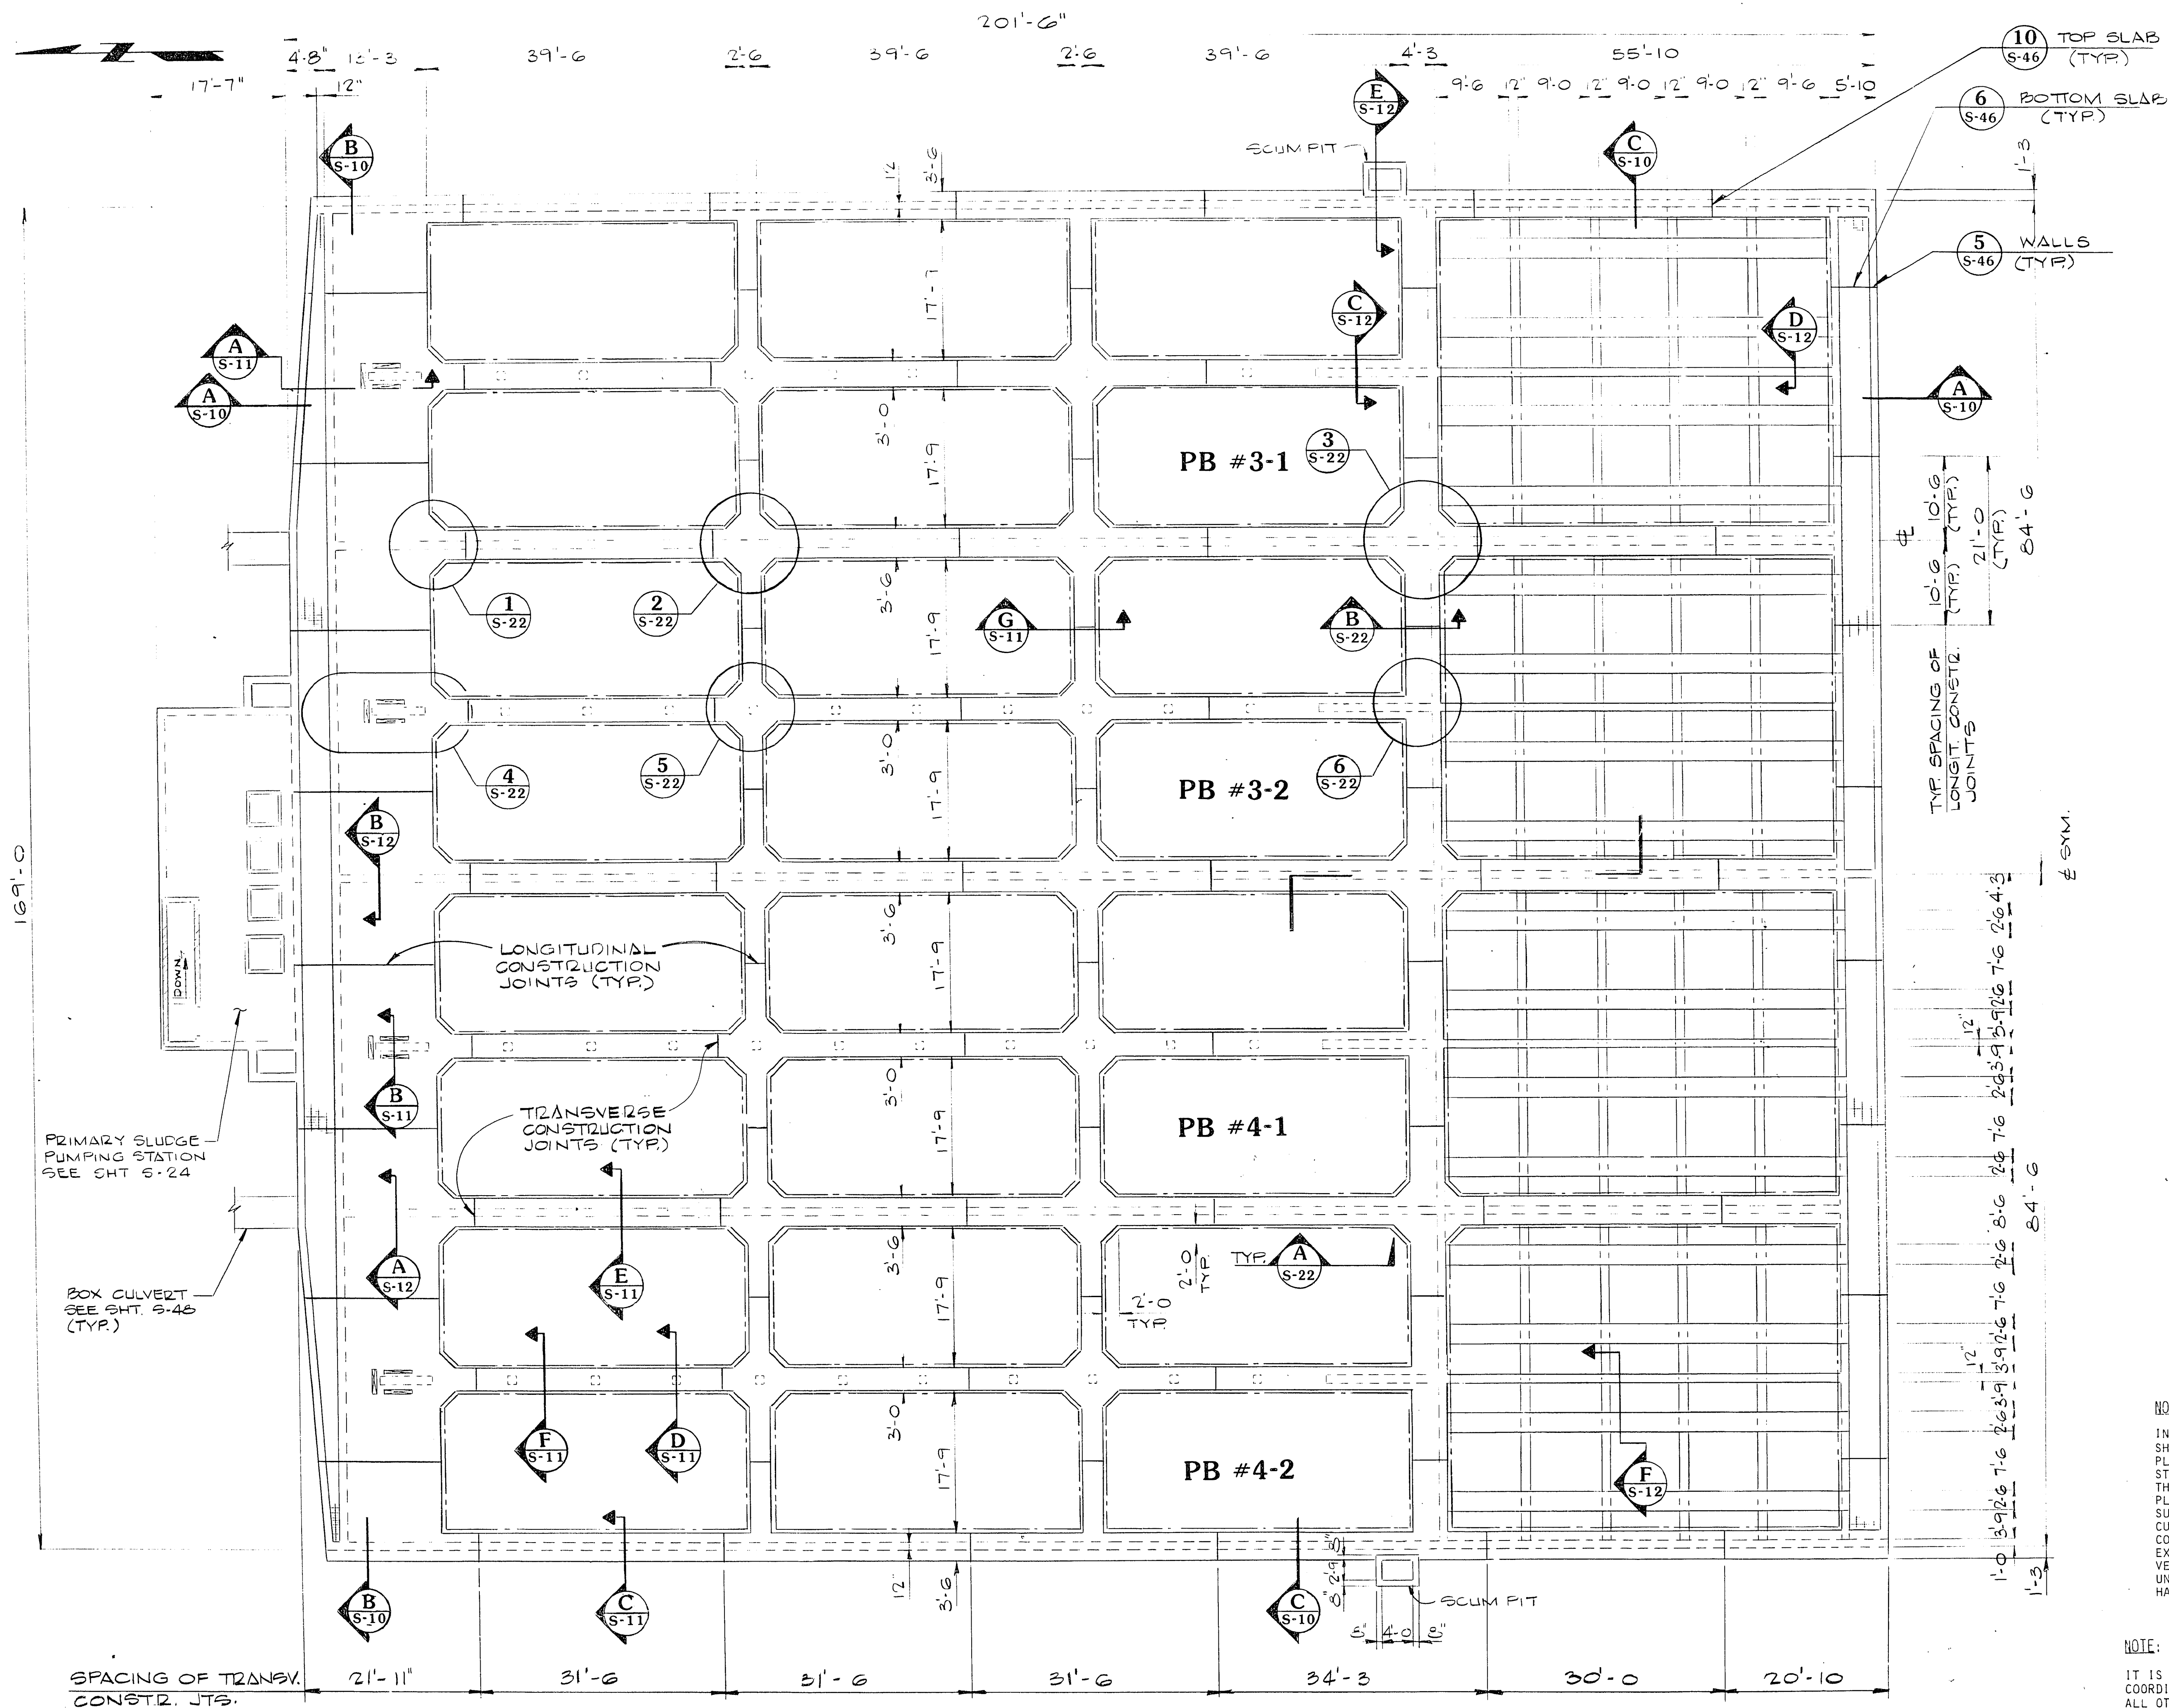

PRIMARY SEDIMENTATION BASINS PLAN

1" = 10'-0"

NOTE:

DO NOT BACKFILL WALLS UNTIL ALL WALKWAYS & ELEVATED SLABS HAVE BEEN IN PLACE FOR A MINIMUM OF 7 DAYS.

NOTE:

IN ORDER TO MINIMIZE THE EFFECTS OF SHRINKAGE, THE CONCRETE SHALL BE PLACED IN UNITS AS BOUNDED BY CONSTRUCTION JOINTS SHOWN ON THE DRAWINGS. THE PLACING OF UNITS SHALL BE DONE BY PLACING ALTERNATE UNITS IN A MANNER SUCH THAT EACH UNIT PLACED SHALL BE CURED AT LEAST 7 DAYS BEFORE THE CONTIGUOUS UNIT OR UNITS ARE PLACED, EXCEPT THAT THE CORNER SECTIONS OF VERTICAL WALLS SHALL NOT BE PLACED UNTIL ALL THE ADJACENT WALL PANELS HAVE CURED AT LEAST 14 DAYS.

NOTE:

IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE THE STRUCTURAL DRAWINGS WITH ALL OTHER CONTRACT DOCUMENTS. STRUCTURAL DRAWINGS DO NOT ATTEMPT TO SHOW ALL PENETRATIONS, OPENINGS, ANCHOR BOLTS, MECHANICAL EQUIPMENT SUPPORTS, PIPE SUPPORTS, ELECTRICAL CONDUITS, ETC.

ALL OPENINGS SHALL CONFORM TO TYPICAL DETAILS ON SHEET S-47.

CULP/WESNER/CULP
CAMERON PARK, CALIFORNIA
SANTA ANA, CALIFORNIA
GENERAL ENGINEERS

G.C. WALLACE
Consulting Engineers, Inc.
1000 South Rainbow Blvd. • Las Vegas, Nevada 89102 • 702-733-1000

PRIMARY SEDIMENTATION BASINS
PLAN

Sheet **S-3**
of **164**

Job No. **740.11**
Designed **GCW**
Drawn **GCW**
Checked **GCW**
Approved **GCW**
Date

Contract **1**
Main Plant Expansion

REVISIONS

No.	By	Revision Description	Date
1			