


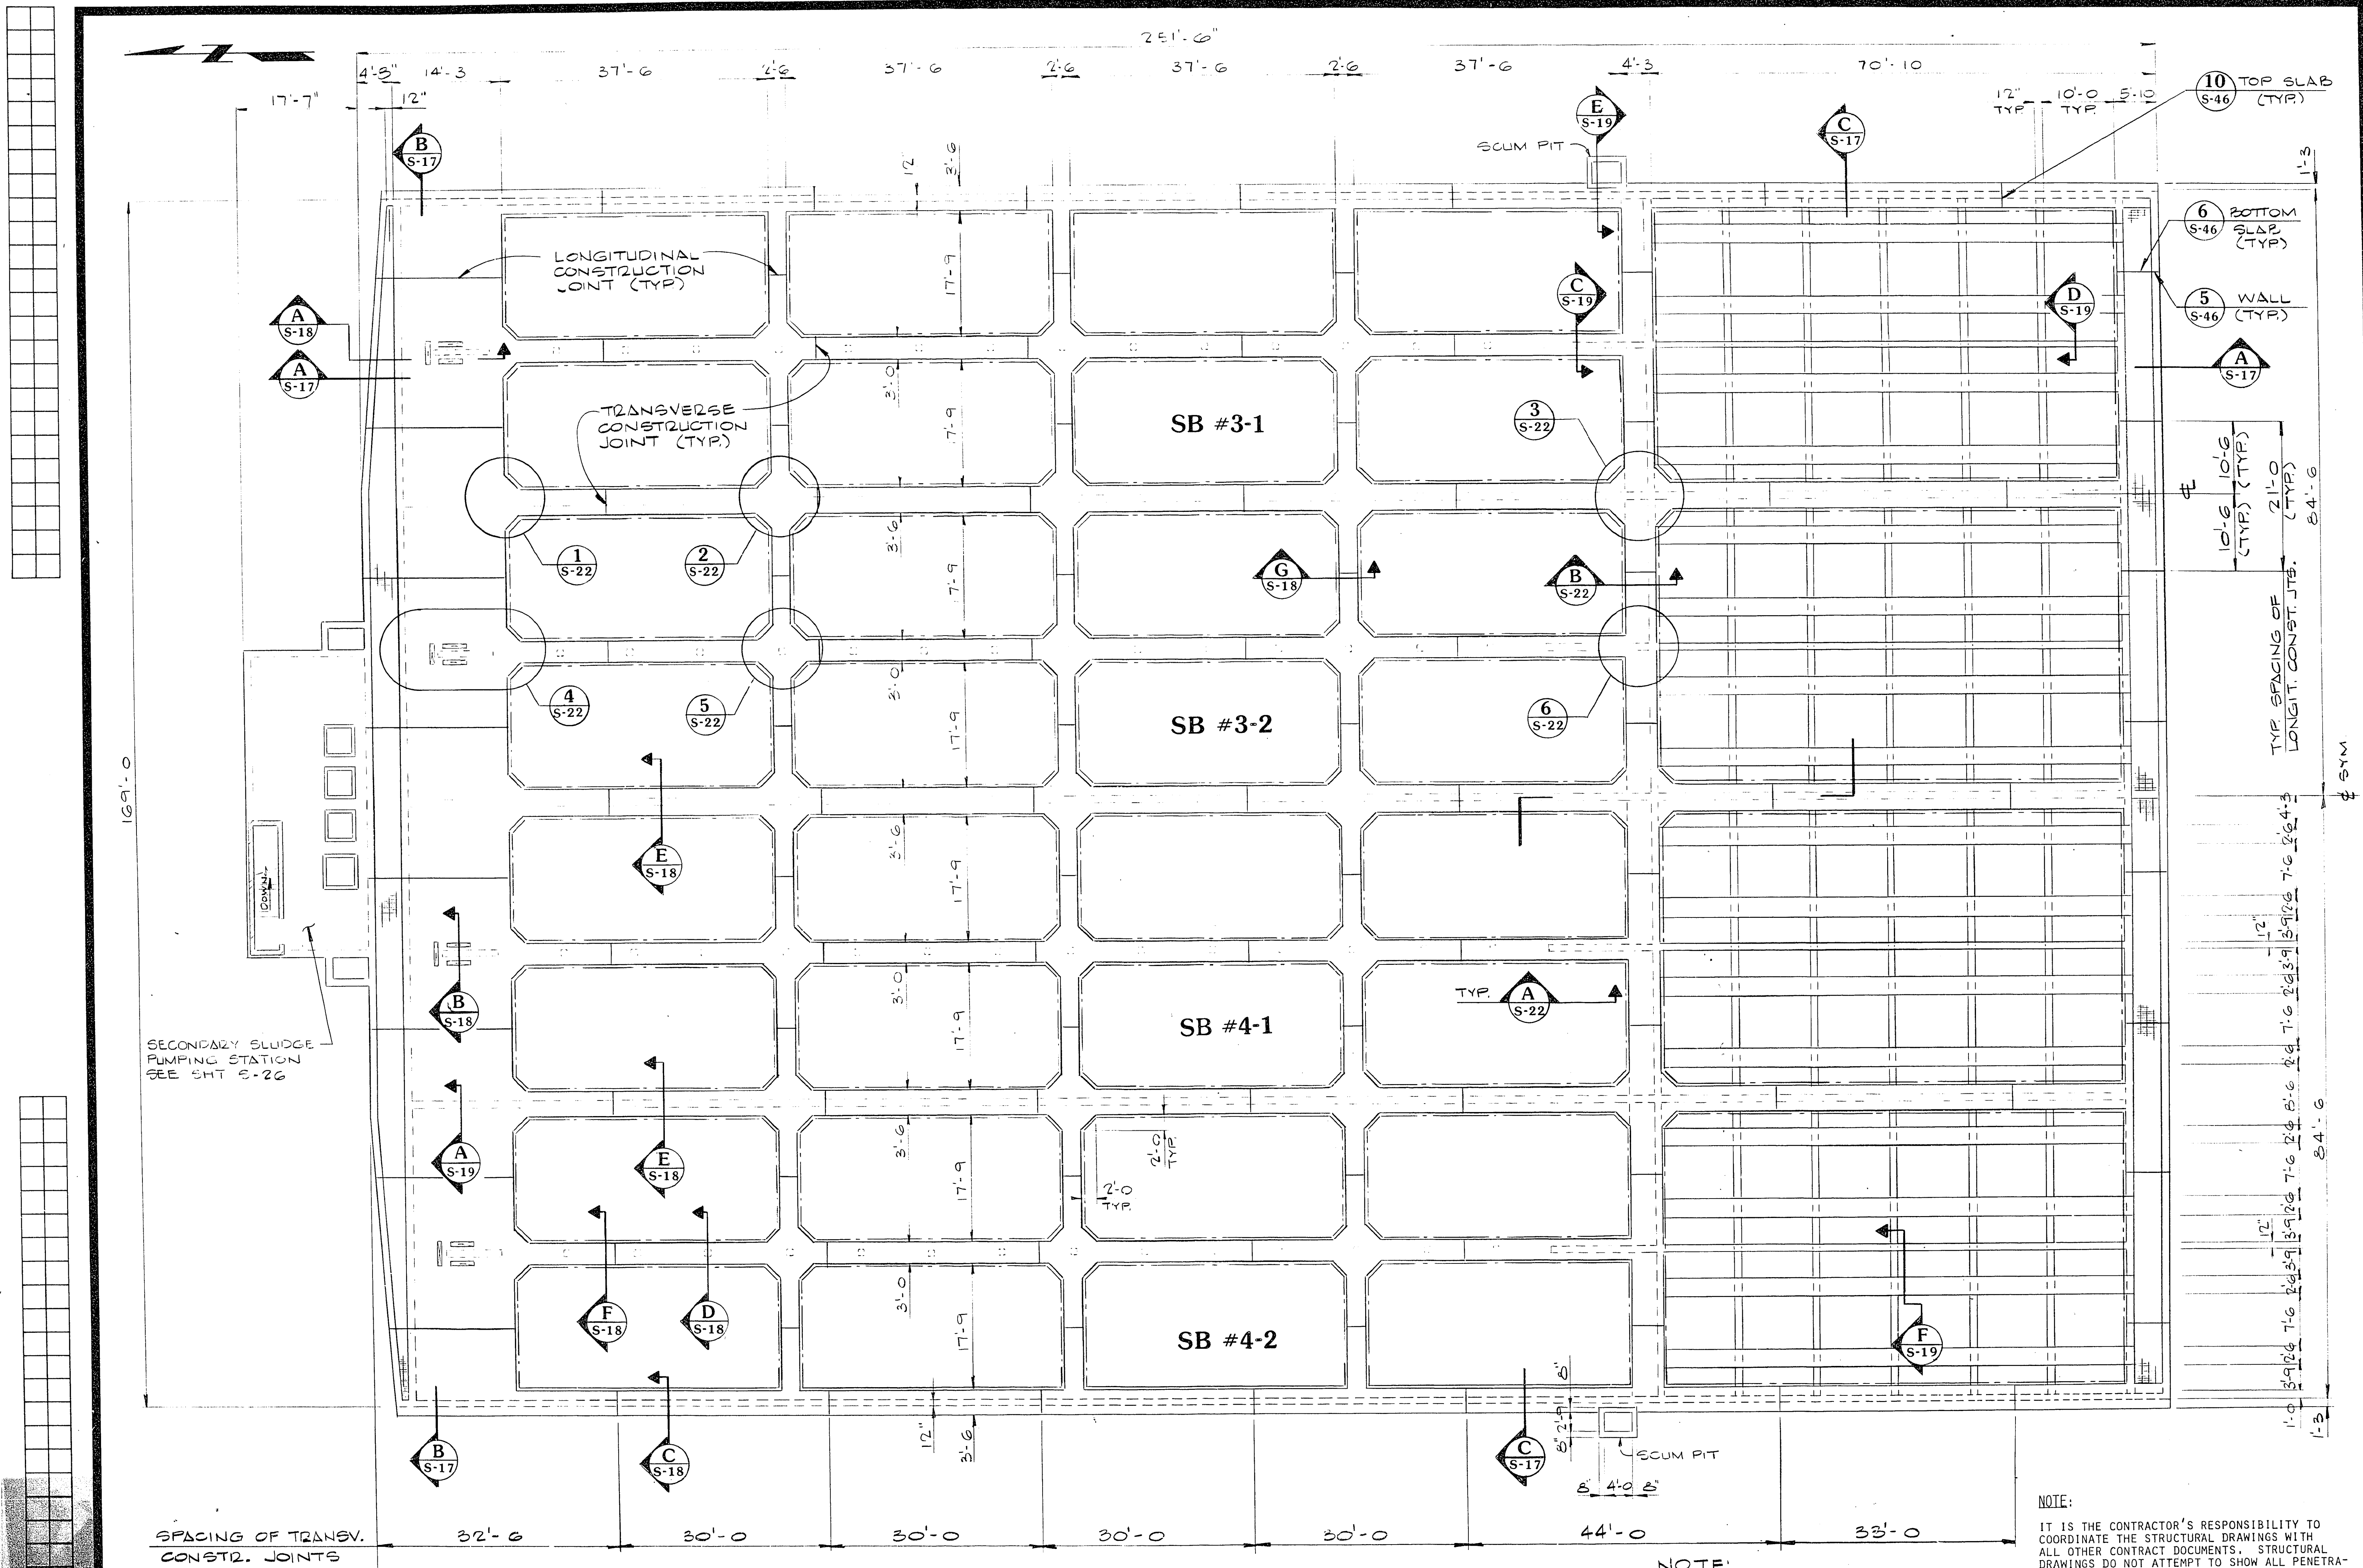

SPACING OF TRANSV. CONST. JOINTS

NOTE:
IN ORDER TO MINIMIZE THE EFFECTS OF SHRINKAGE, THE CONCRETE SHALL BE PLACED IN UNITS AS BOUNDED BY CONSTRUCTION JOINTS SHOWN ON THE DRAWINGS. THE PLACING OF UNITS SHALL BE DONE BY PLACING

ALTERNATE UNITS IN A MANNER SUCH THAT EACH UNIT PLACED SHALL BE CURED AT LEAST 7 DAYS BEFORE THE CONTIGUOUS UNIT OR UNITS ARE PLACED, EXCEPT THAT THE CORNER SECTIONS OF VERTICAL WALLS SHALL NOT BE PLACED UNTIL ALL THE ADJACENT WALL PANELS HAVE CURED AT LEAST 14 DAYS.

SECONDARY SEDIMENTATION BASINS PLAN

1" = 10'-0"

NOTE:
DO NOT BACKFILL WALLS UNTIL ALL WALKWAYS & ELEVATED SLABS HAVE BEEN IN PLACE FOR A MINIMUM OF 7 DAYS.

NOTE:
IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE THE STRUCTURAL DRAWINGS WITH ALL OTHER CONTRACT DOCUMENTS. STRUCTURAL DRAWINGS DO NOT ATTEMPT TO SHOW ALL PENETRATIONS, OPENINGS, ANCHOR BOLTS, MECHANICAL EQUIPMENT SUPPORTS, PIPE SUPPORTS, ELECTRICAL CONDUITS, ETC.
ALL OPENINGS SHALL CONFORM TO TYPICAL DETAILS ON SHEET S-47.

CULP/WESNER/CULP
CAMERON PARK, CALIFORNIA
SANTA ANA, CALIFORNIA, DENVER, COLORADO

SEDIMENTATION BASINS

PLAN

Sheet **S-15**
of 164

6.1-60 3/12/1

CITY OF LAS VEGAS
WASTEWATER TREATMENT PLANT
Main Plant Expansion
Contracts 1

DESIGNED BY: G.C.W.
DRAWN BY: G.C.W.
CHECKED BY: H.D.R.
APPROVED BY: H.D.R.

Job No. 740-11
Designed G.C.W.
Drawn G.C.W.
Checked H.D.R.
Approved H.D.R.
Date

REVISIONS
No. By Revision Description Date