




- 1- ALL DEMOLITION WORK SHALL BE COORDINATED WITH OWNER FOR TEMPORARY LOSS OF SERVICE TO FACILITY OR PORTIONS OF FACILITY AS REQUIRED. ALL EXISTING WALLS, FLOORS, ETC. EFFECTED BY THE REMOVAL OF EXISTING EQUIPMENT OR INSTALLATIONS SHALL BE PATCHED, REPAIRED AND FINISHED TO MATCH ADJACENT. ALL EXISTING FIRE PROTECTION ASSEMBLIES EFFECTED BY THE DEMO WORK SHALL BE REPAIRED WITH FIRE STOPPINGS AND CAULKINGS AS REQUIRED TO MAINTAIN THE INTEGRITY OF FIRE RATED CONSTRUCTIONS.
- 2- EXISTING EQUIPMENT SHOWN ON THIS PLAN IS BASED ON AVAILABLE INFORMATION AND SHALL BE VERIFIED BY THE CONTRACTOR. ALL DISCREPANCIES BETWEEN PLANS AND ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE ENGINEER IN WRITING PRIOR TO BID.
- 3- ALL CONDUITS AND CONDUCTORS ON OR IN PARKING STRUCTURE SHALL BE INSTALLED INSIDE TUBE STRUCTURAL STEEL OR SURFACE MOUNTED TO STRUCTURAL STEEL, RAIL OR CONCRETE WITH STRUCTURAL MEMBERS TO CONCEAL FROM VIEW TO THE MAXIMUM EXTENT POSSIBLE. CONDUIT, CONDUCTORS AND CABLEING RUN WITHIN STRUCTURAL STEEL SHALL BE AS INDICATED IN PROJECT SPECIFICATIONS.

- 1- EXISTING BUILDING MOUNTED WALL PACK LIGHT TO REMAIN.
- 2- INTERCEPT EXISTING SITE LIGHTING CIRCUIT AND EXTEND TO WP J--BOX AT COVERED PARKING CANOPY.
- 3- PROVIDE 3/4" C, 2 #10, 1 #10 GRD.
- 4- PROVIDE WET LISTED MC CABLE BRANCH CIRCUIT CABLING CONCEALED IN CANOPY STRUCTURE (10'-2 WITH GROUND).

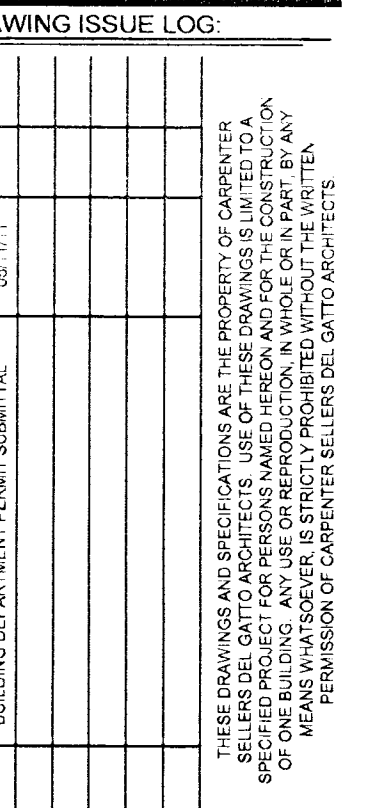

CARPENTER SELLERS DEL GATTO
ARCHITECTS

1918 S. JONES, SUITE "C" - LAS VEGAS, NV 89146
(702) 261-8896 - FAX (702) 261-8876 - WWW.CSDARCHITECTURE.COM

[illegible]

E1.02