


CONDUIT SHALL BE 2" WITH
10 CONDUCTOR CABLE

EQUIPMENT REQUIRED FOR THIS PROJECT

1. 2 - Type 1-A poles.
2. 2 - 12" signal units.
3. 2 - Type C foundations.
4. 1 - pullbox #33.
5. 1 - 30 amp service.
6. 1 - flasher controller.
7. 170' - 2" P.V.C. conduit.
8. 200' - 10 conductor cable.
9. 100' - #10 awg wiring.

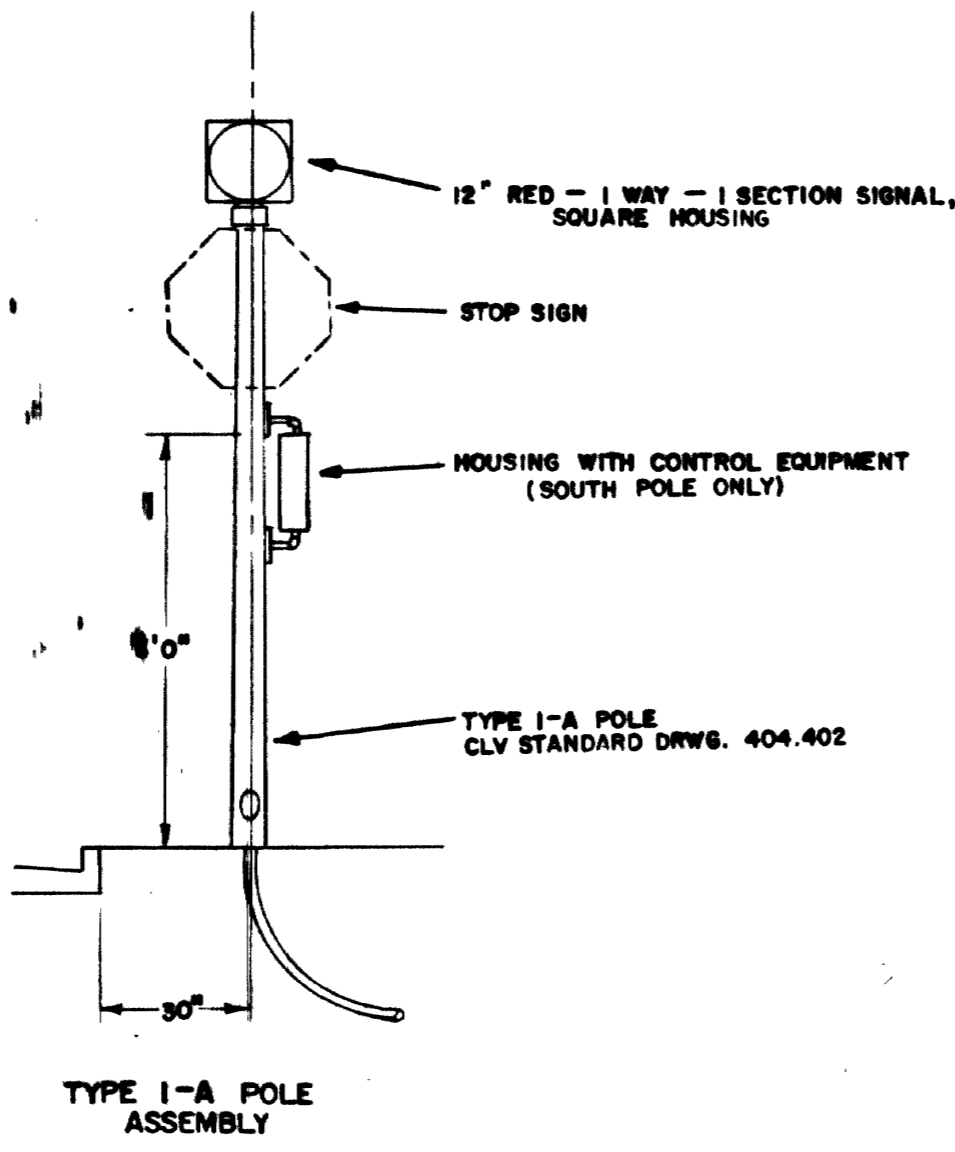

Department of Public Services Traffic Engineering Division		W.O. no. 4/16/86	
WYOMING AVENUE & CASINO CENTER BLVD.		Design by G. DAMMEIR	
FLASHING STOP SIGNS		Drawn by G. PHILLIPS	
		Approved by Supervisor of Traffic Date:	
		Approved by the City Engineer Date:	
		Revisions Date	

