
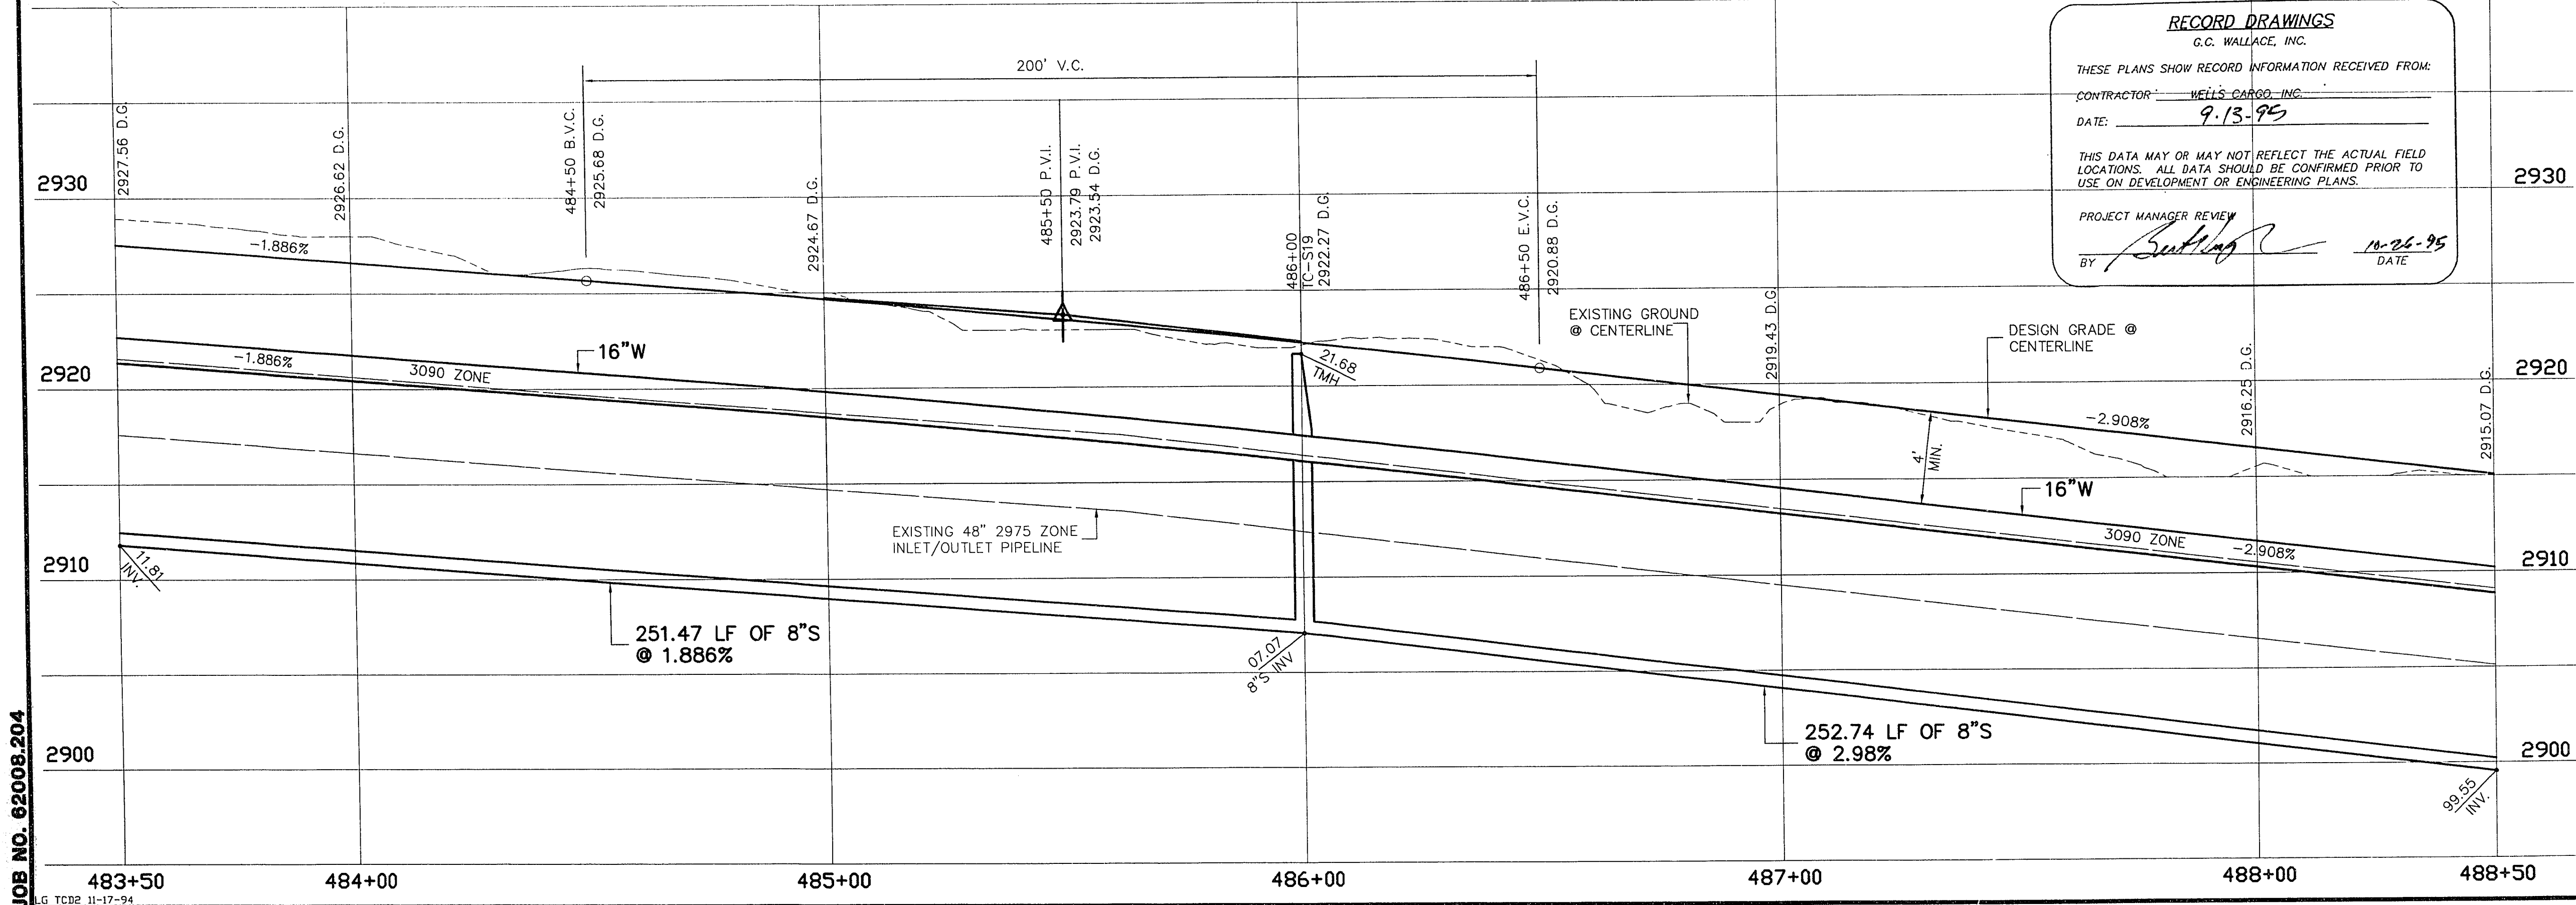


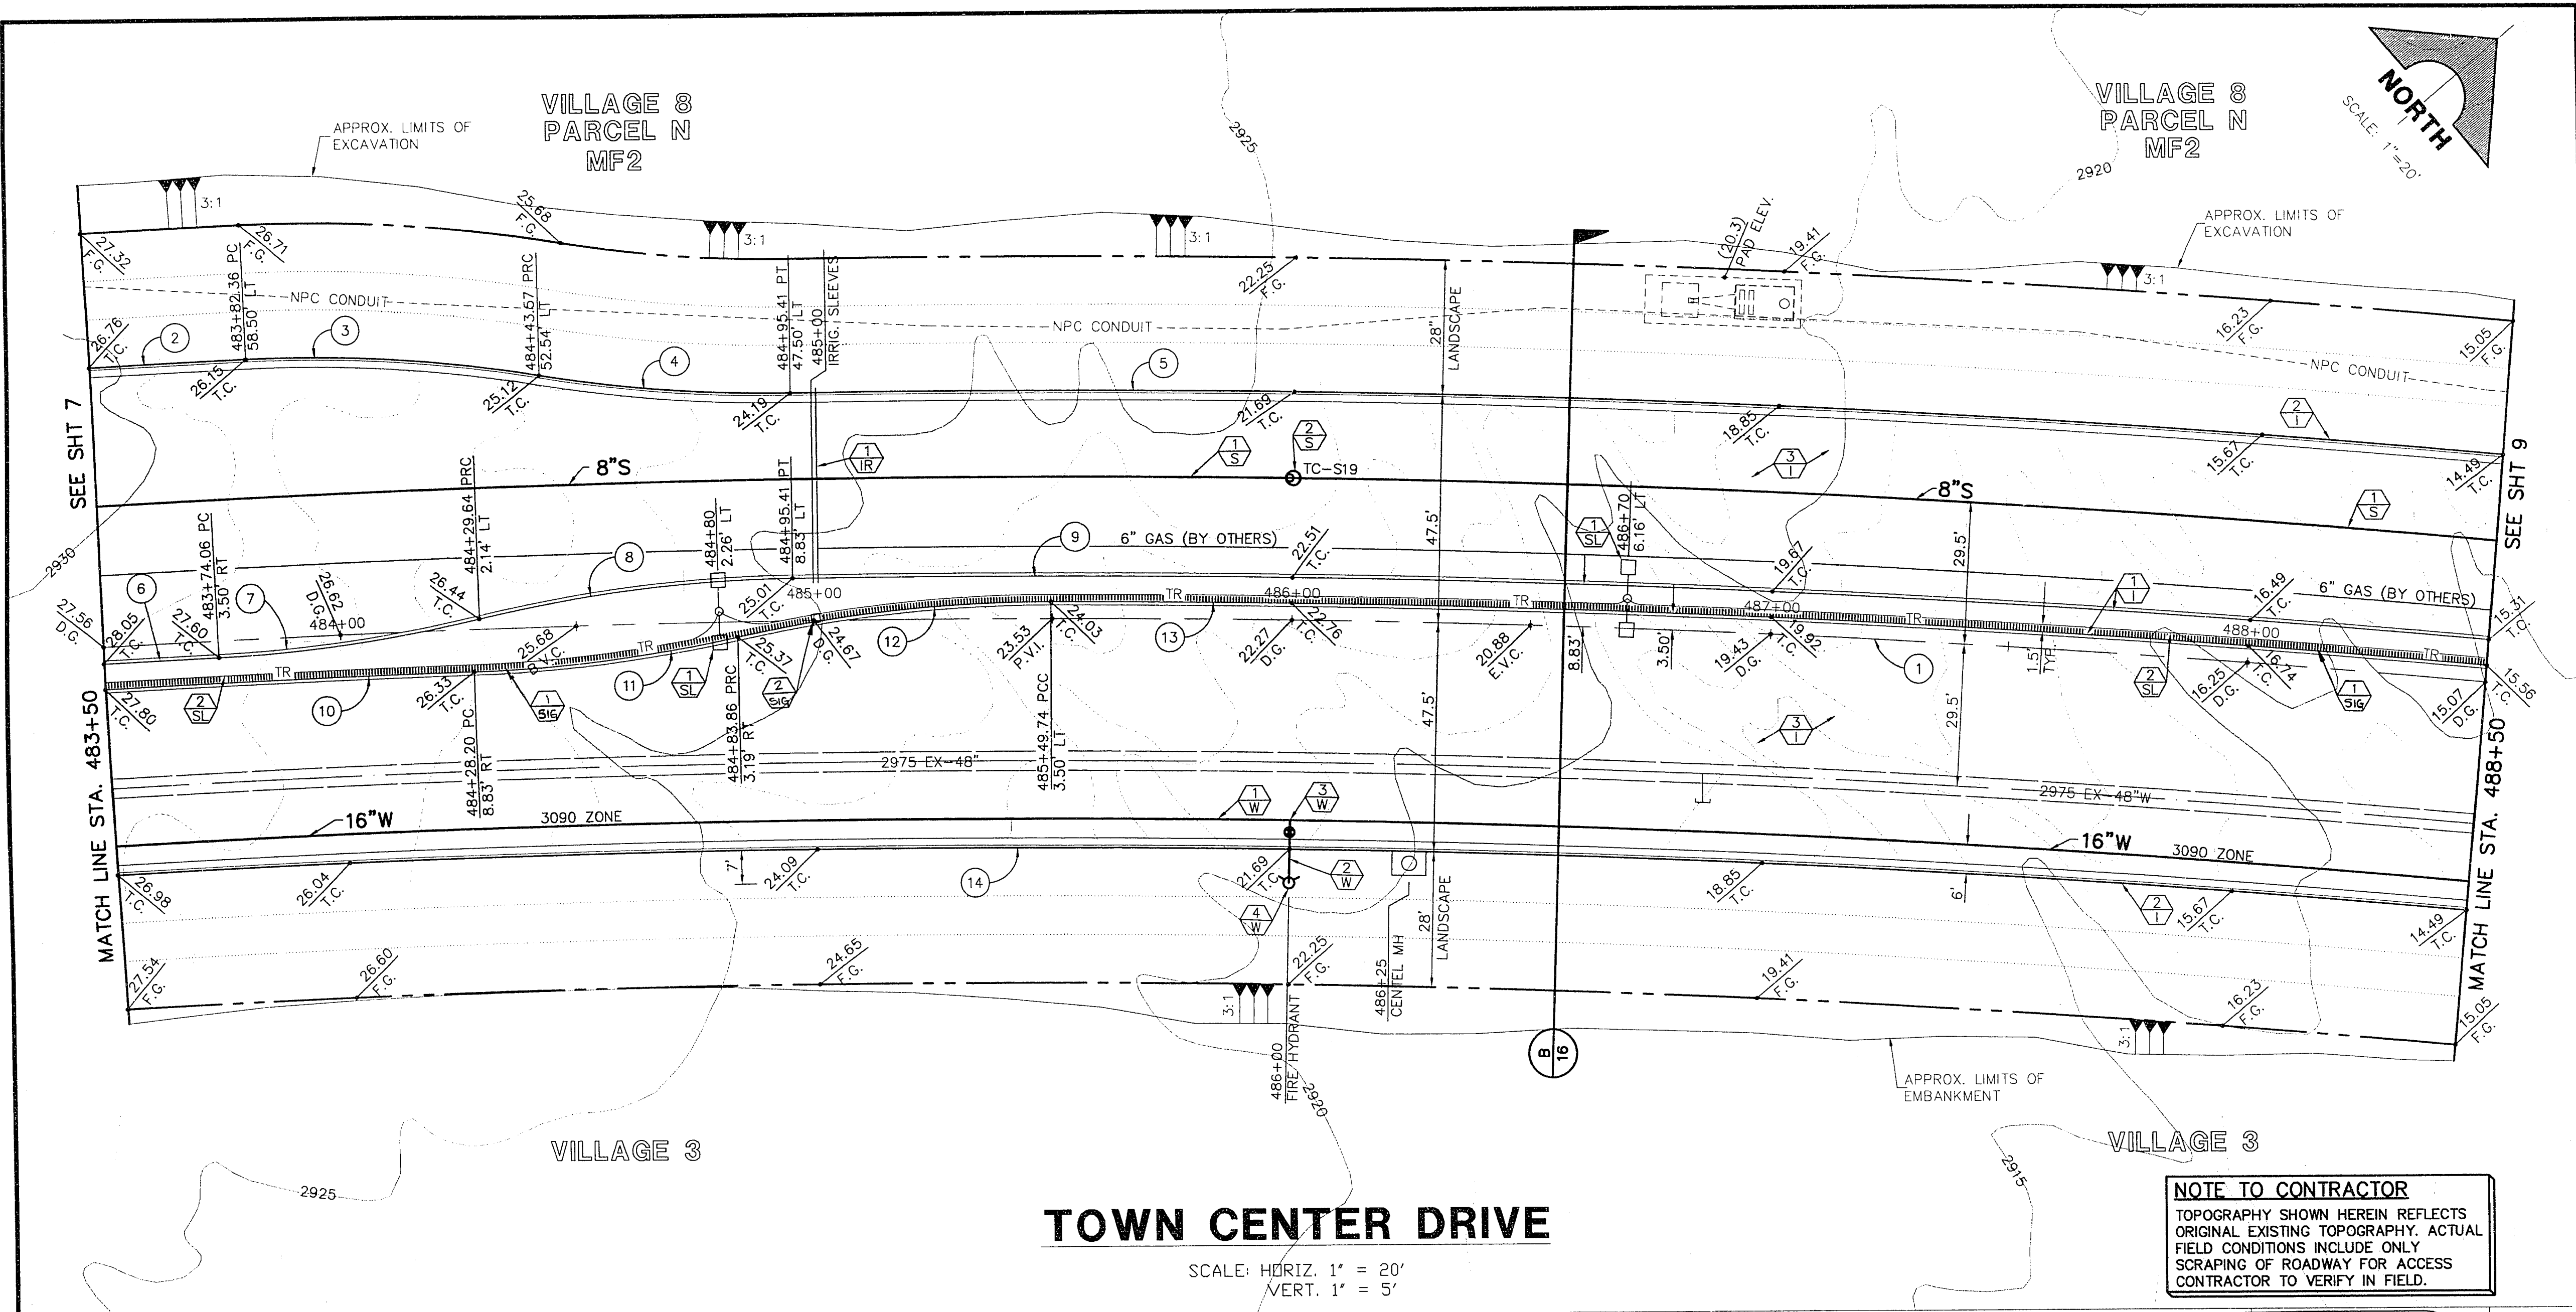

CURVE DATA

NO.	Δ	R	L	T	DESCRIPTION
1	08°11'06"	3500.00'	500.00'	250.43'	CENTERLINE
2	00°31'47"	3558.50'	32.90'	16.45'	BC
3	11°57'07"	300.00'	62.58'	31.40'	BC
4	10°06'04"	300.00'	52.89'	26.51'	BC
5	05°48'17"	3547.50'	359.40'	179.85'	BC
6	00°23'38"	3496.50'	24.03'	12.02'	ISBC
7	10°41'03"	300.00'	55.94'	28.05'	ISBC
8	12°40'14"	300.00'	66.34'	33.31'	ISBC
9	05°48'17"	3508.83'	355.48'	177.89'	ISBC
10	01°16'48"	3491.17'	78.00'	39.00'	ISBC
11	10°40'58"	300.00'	55.93'	28.05'	ISBC
12	12°40'20"	300.00'	66.35'	33.31'	ISBC
13	04°54'55"	3503.50'	300.56'	150.37'	ISBC
14	08°11'06"	3452.50'	493.21'	247.03'	BC

BC = BACK OF CURB
ISBC = ISLAND BACK OF CURB

CONSTRUCTION NOTES

- IMPROVEMENTS**
- 1. INSTALL "A" TYPE CURB (S-50)
 - 2. INSTALL "L" TYPE CURB & GUTTER (S-47)
 - 3. INSTALL AC PAVEMENT PER SECTION SHT. 16


- WATER**
- 1. INSTALL 16" DIA. WATER PIPE (U-20)
 - 2. INSTALL 6" DIA. WATER PIPE (U-20)
 - 3. INSTALL 6" GATE VALVE @ 16"x6" TEE (U-20)
 - 4. INSTALL FIRE HYDRANT (U-33)

- SEWER**
- 1. INSTALL 8" DIA. SEWER PIPE (U-20)
 - 2. INSTALL SEWER MANHOLE (601-B CLV)

- STREET LIGHTING**
- 1. INSTALL STREET LIGHT, SEE ELECTRICAL PLANS (E-2)
 - 2. STREET LIGHT OR COMMON TRENCH, SEE ELECTRICAL PLANS

- IRRIGATION**
- 1. INSTALL 2-4" SDR 35 PVC IRRIGATION SLEEVES (U-18)

- TRAFFIC**
- 1. INSTALL 2" INTERCONNECT (E-32)
 - 2. INSTALL NO. 5 PULLBOX (E-32)

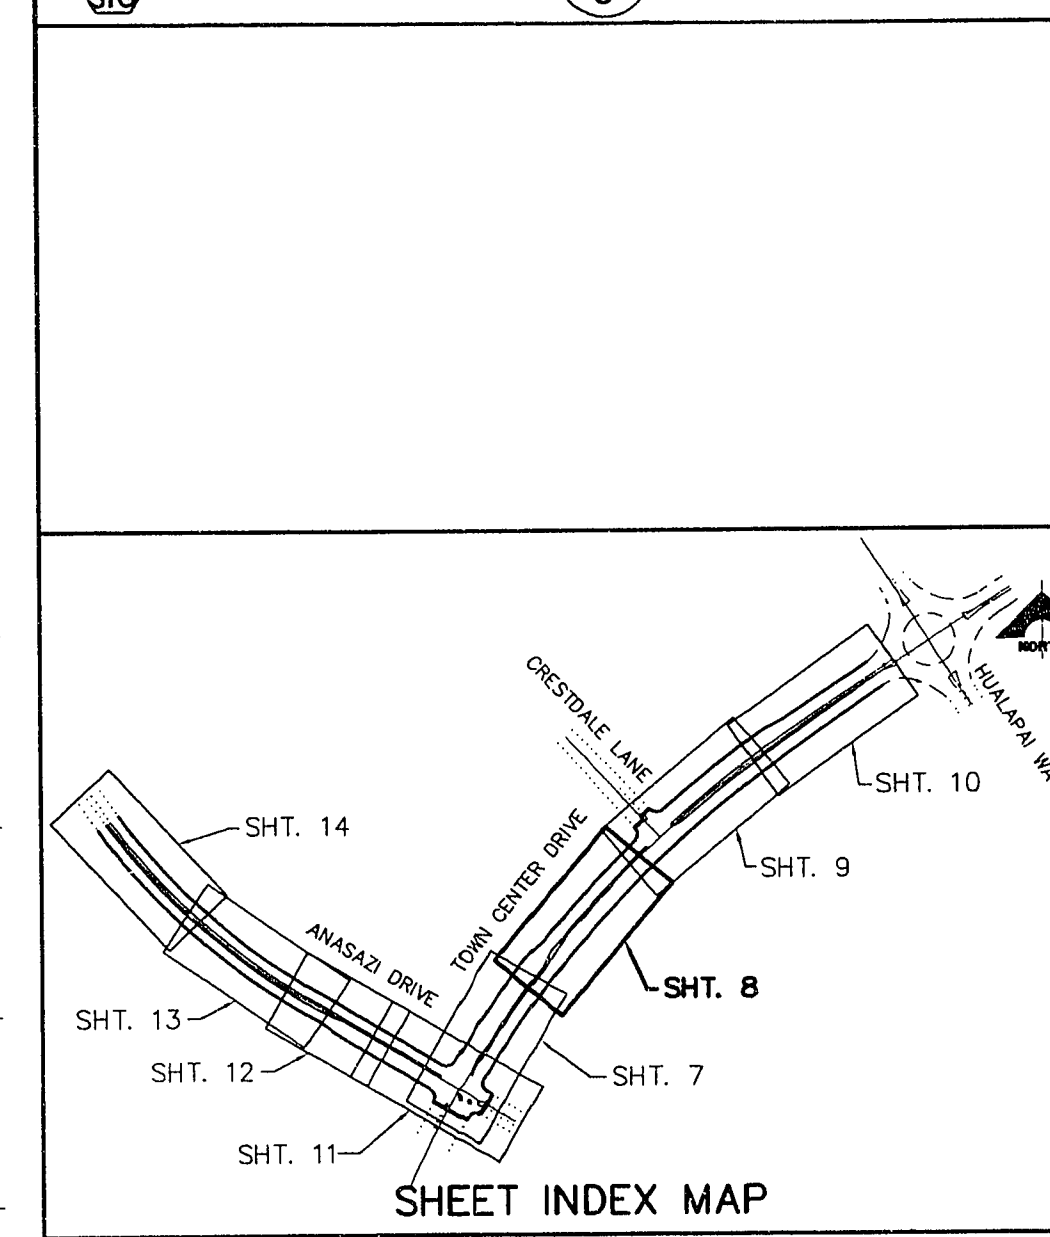

APPROVAL:

[Signature] 1-13-95
LAS VEGAS VALLEY WATER DISTRICT

RECOMMENDED

ENGINEER
G.C. WALLACE, INC.
Engineering/Architecture
1555 SOUTH RANCHO BLVD./LAS VEGAS, NEVADA 89102

UNIT 3
TOWN CENTER DRIVE
PLAN & PROFILE
STA 483+50 TO 488+50

SHEET
8
SHT 8 OF 19