

QUANTITIES

SHEET NO.

28 29 30 31 32 33 34

STREET IMPROVEMENTS:

NO.	LEGEND	DESCRIPTION	UNIT	TOTAL	TOTALS BY SHEET									
1		2" AC PAVEMENT	S.Y.	73658	3308	3383	3328	3307	3307	3480	3737			
2		TYPE II GRAVEL BASE	C.Y.	17873	771	799	787	782	782	823	884			
3		30" "ROLL" TYPE CURB & GUTTER	L.F.	39090'	1917'	1904'	1933'	1860'	1878'	1960'	2170'			
4		8" VALLEY GUTTER	S.F.	8711										
5		4' SIDEWALK	S.F.	159093	7567	7859	7731	7683	7683	8083	8682			
6		SIDEWALK RAMP (NOTE TRANSITION LENGTHS)	EA.	54										
7		CONCRETE DRIVEWAY	S.F.	30179		20		20	20	20				
8		TRANS. FROM "L" TYPE TO ROLL "TYPE" CURB	L.F.	430'										

WATER:

1		STD. F.H. W/6" G.V. & 6" A.C.P. LATERAL	EA.	41										
2		3/4" SERVICE W/METER BOX	EA.	380										
3		3/4" METER BY L.V.V.W.D.	EA.	380										
4		3/4" SERVICE W/METER BOX (INCLUDES 1 IRRIGATION METER)	EA.	146										
5		5/8" METER BY L.V.V.W.D.	EA.	146										
6		BLOW OFF VALVE	EA.	5										
7		8" PVC	L.F.	8,087'										
8		6" PVC	L.F.	12,894'										
9		8" GATE VALVE	EA.	16										
10		6" GATE VALVE	EA.	31										
11		8" x 8" TEE	EA.	7										
12		8" x 6" TEE	EA.	18										
13		6" x 6" TEE	EA.	1										
14		12" x 8" REDUCER	EA.	4										
15		8" x 6" REDUCER	EA.	4										
16		8" x 6" CROSS	EA.	2										
17		8" x 90' ELL	EA.	4										
18		6" x 90' ELL	EA.	1										
19		8"-45' BEND	EA.	2										
20		6"-45' BEND	EA.	2										
21		8" x 22-1/2' BEND	EA.	1										
22		6" x 22-1/2' BEND	EA.	1										
23		8" x 11-1/4' BEND	EA.	1										
24		6" x 11-1/4' BEND	EA.	1										
25		3/4" RPPA	EA.	1										
26		1 1/2" RPPA	EA.	6										
27		1 1/2" IRRIGATION METER & SERVICE	EA.	6										
28		CONN. TO EXIST. WATER LINE	EA.	4										

SEWER:

28 29 30 31 32 33 34

1		10" PVC SEWER	L.F.	1,558'										
2		8" PVC SEWER	L.F.	19,943'	1041'	1090'	1062'	1011'	1010'	1060'	1133'			
3		4" LATERAL	L.F.	13,730'	1464'	602'	701'	726'	750'	779'	869'			
4		STD. M.H.	EA.	68	3	2	3	3	3	3	3			
5		CONN. TO EXIST. SANITARY SEWER	EA.	8	20'	20'	20'	20'	20'	20'	20'			
6		CONC. SEWER ENCASEMENT	L.F.	180'										

STREET LIGHTS:

1		100W. HRS LUMINAIRE W/11 GA. POLE	EA.	115										
2		3 1/2" PULL BOX	EA.	13										
3		1 1/4" PVC CONDUIT	L.F.	20164.26'										
4		ELECTRICAL SERVICE / S.P. & R.C.O.C.	EA.	4										

MISCELLANEOUS:


1		6" D-3 STREET NAME SIGN	EA.	29										
2		30" R1-1 STOP SIGN	EA.	3										
2		24" x 30" R2-1 SPEED LIMIT SIGN	EA.	3										

STORM DRAIN:

1		MODIFIED TYPE "C" DROP INLET L = 20'- 6"	EA.	10										
2		MODIFIED TYPE "C" DROP INLET L = 11'- 6"	EA.	22										
3		36" R.C.P.	L.F.	256'										
4		30" R.C.P.	L.F.	287'										
5		24" R.C.P.	L.F.	748'										
6		18" R.C.P.	L.F.	1103'										
7		STD. M.H.	EA.	10										
8		CONNECT TO EXIST. STORM DRAIN	EA.	8										

NOTE TO CONTRACTOR

QUANTITIES SHOWN ARE ESTIMATES ONLY AND ARE INTENDED TO ILLUSTRATE SCOPE OF WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE EXACT QUANTITIES INVOLVED.

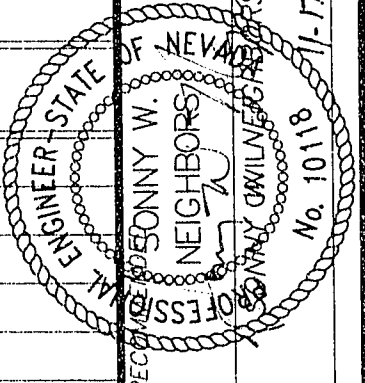

G. C. WALLACE, INC.
Engineering/Architecture
1555 SOUTH RAINBOW BLVD/LAS VEGAS, NEVADA 89102

DEL WEBB COMMUNITIES, INC.
SUN CITY LAS VEGAS UNIT NO. 46
ESTIMATE OF QUANTITIES

SHEET
3B

OF 48 SHEETS

10-11-75 107Y-4141-46